


EDCON-COMPONENTS




Specifications

Insulation Material: Polyvinyl Chloride (PVC)
 Conductor: #30 AWG (7*0,102) Stranded Tinned Coppe
 UL-Style: 2651
 Colour of Isolation: Gray w. Red Line
 Operating Temperature: -20°C to +105°C
 Flammability Rating: UL-VW-1
 Voltage Rating: 300V

Electrical:
 Impedance: 89Ω (Unbalanced)
 Capacitance: 17,5pf/feet
 Inductance: 14μH/Feet
 Insulation Resistance: 1GΩ / M min.

Dimensions (mm)

Pos.	A	B
48	41,64	40,80
96	82,44	81,60

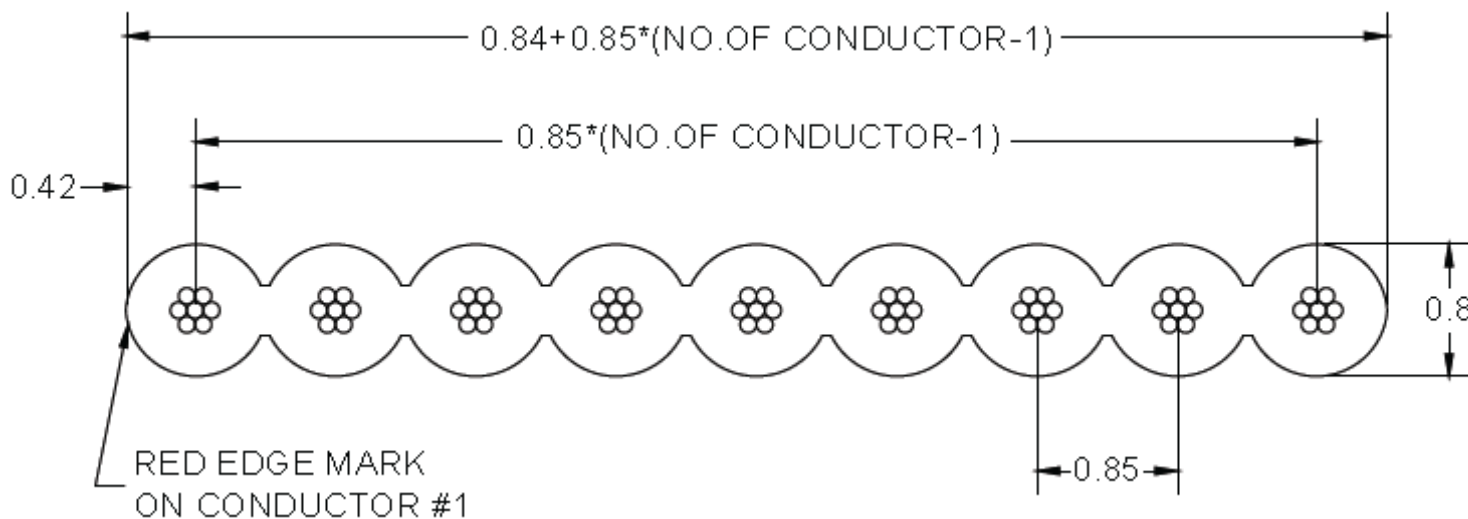

Flat Ribbon Cable Pitch 0,85mm AWG30	
Part No.:	T29040
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	13.12.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

EDCON-COMPONENTS



Ordering Informations

Serie	Number of Position	Colour of Cable	AWG Size	Special function	Special function	ROHS	Packing
T29040	xx	GY	30	00	00	R	Rxx

xx= Like Table	GY= Gray	30= wire Size AWG30	00= No function	00= No function	R= ROHS Conform N= NON ROHS Conform	Rxx= Length of cable per Reel

Flat Ribbon Cable Pitch 0,85mm AWG30	
Part No.:	T29040
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	13.12.2018
APPD:	Schumi			FINISH	Jamy			Sheet No.	2 from 2