



DISCRIPTION

FEATURES

Low cost, high performance inductor. Super low resistance with high current rating.

OPTIONS

Tape & Reel is Standard Tolerance: M=20% is Standard, Tighter Tolerances Available

APPLICATIONS

Excellent as DC-DC Converter used in notebook computers, PDA, step up or step down converters.

PHYSICAL CHARACTERISTICS

- Inductance measured by LCR Meter HP 4284A
- DC Resistance measured by Milliohm meter HP4338B
- SRF measured by Network analyzer HP 4294/HP4291
- SRF is for reference only
- Temperature rise = 40°C max at I rms
- ▲ _/L0A=10% typical at I sat

ELECTRICAL SPECIFICATIONS

Properties	Test conditions		Value	Unit	Tol.
Inductance		L	560	nH	see Site 2
Q factor		Q			min.
DC-resistance		DCR typ.		Ω	typ.
DC-resistance		DCR max.	0,01	Ω	max.
Self-Res. Freq.		SRF	200	MHz	min.
Test-Freq.			100	KHz	
Rated Current		Irms	7,7	Α	max.
Saturation Current		Isat	6,0	Α	max.

 This electronic component is meant to be used in general electronic equipment. Before the incorporation of this component into any equipment with higher and more reliable requirements such as aviation, aerospace, submarine, nuclear control, transportation, transportation signal, disaster prevention, medical, public information network, etc. or if there is a possibility of injuries or damages to the human body, Edcon 						SMT UN POWER I	-	
-Components must be informed before the stage of design-in. Evaluation checks for safety have to be performed on each electronic components used in electrical circuits that require high safety and reliability						Part No.:	S42	2001-R56
functions.						Customer:		
DRW:	Chang	CHKD	Young	MATL:	Chu Chi	DATE		26.06.2009
APPD:	Pong			FINISH	Vienna	Sheet		1 from 2

www.edcon-components.com


email: info@edcon-components.com

Copyright by EDCON-COMPONENTS





TECHNICAL INFORMATIONS

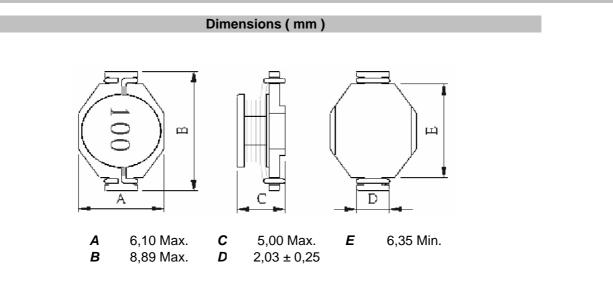



Ordering Information

Serie	and	Range

S42001-R56

Tolerance	ROHS	Packing			
м	R	TR			
	•				
K = 10%	R = ROHS	BU = Bulk Ware			
M = 20%	N = non ROHS	TR = Tape Reel			

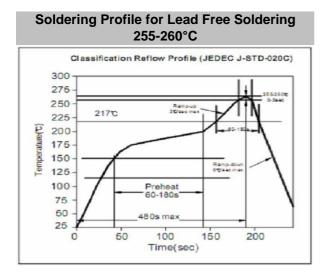

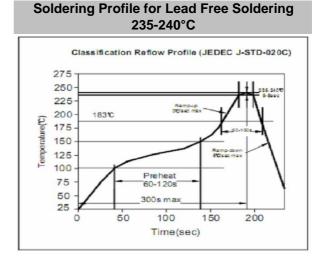

 This electronic component is meant to be used in general electronic equipment. Before the incorporation of this component into any equipment with higher and more reliable requirements such as aviation, aerospace, submarine, nuclear control, transportation, transportation signal, disaster prevention, medical, public information network, etc. or if there is a possibility of injuries or damages to the human body, Edcon 						SMT UNSHIELDED POWER INDUCTORS		
-Components must be informed before the stage of design-in. Evaluation checks for safety have to be performed on each electronic components used in electrical circuits that require high safety and reliability					Part No.:	S42	2001-R56	
functions.					Customer:			
DRW:	Chang	CHKD	Young	MATL:	Chu Chi	DATE		26.06.2009
APPD:	Pong			FINISH	Vienna	Sheet		2 from 2

www.edcon-components.com

Copyright by EDCON-COMPONENTS

email: info@edcon-components.com