





#### Applications

Interior automotive lighting

 Optical indicators
 Communication Products
 Backlighting

 Toys

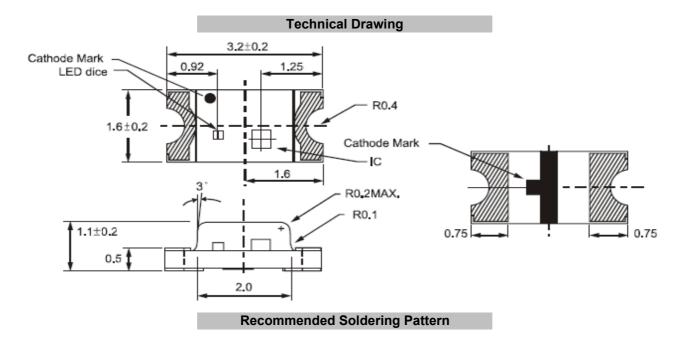

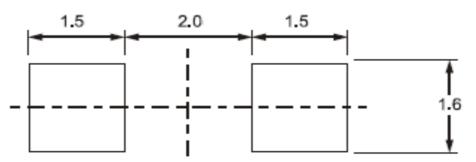

	: All dimensions ± 0.1mm unles		SMT	Blinking Chip Orange	LED		
			Part No	.: M11N	N6011		
					Custome	er:	
DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	05.12.2009
APPD:	Ping		Hui	Sheet	1 from 9		
			Copyright by E	DCON-COMPC	NENTS		





# Absolute Maximum Ratings

Ta=25°C

Item	Symbol	AlGalnP	Unit
Power Dissipation	P <sub>D</sub>		mW
DC Forward Current	I <sub>F</sub>	12	mA
Plused Forward Current	I <sub>FP</sub> *	100	mA
Reverse Voltage	V <sub>R</sub>	5	V
Operating Temperature	Τ <sub>ΟΡ</sub>	-25 to 80	°C
Storage Temperature	T <sub>ST</sub>	-20 to 85	°C

\* 0.1 msec pulse, 10% duty cycle

# Electrcal / Optical Characteristics

Ta=25°C

Ermitting Color		Orange	
Material		AlGalnP	
Forward Current	typ.	20	A
Forward Current	max.		А
Wavelength	λP	610	nm
typ.	Δλ		nm
Color Temperature	min.		К
color remperature	max.		К
Luminous Intensity *	min.	28	mcd
Lumnous intensity	typ.	50	mcd
Dulas Pata	min.	2.0	Hz
Pulse Rate	typ.	2.4	Hz
VDD - 5V	max.	3.0	Hz
Reverse Current	max.		μA
Viewing Angle	2Θ1/2	120	

\* Per NIST standards

					SMT	Blinking Chip Orange	) LED			
					Part No.	: M11	N6011			
					Custome	er:				
DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	05.12.2009			
APPD:	Ping			FINISH	Hui	Sheet	2 from 9			
	Copyright by EDCON-COMPONENTS									





**Directive Characteristics** 

					SMT E	Blinking Chi Orange	p LED
					Part No.:	M11	N6011
					Customer:		
DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	05.12.2009
APPD:	Ping			FINISH	Hui	Sheet	3 from 9
			Copyright by E	DCON-COMPO	NENTS		





Curvs


					SMT	Blinking Chij Orange	o LED		
					Part No.	: M11	N6011		
					Custome	r:			
DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	05.12.2009		
APPD:	Ping			FINISH	Hui	Sheet	4 from 9		
	Copyright by EDCON-COMPONENTS								





## **Solder Condition**

## Lead Free Solder

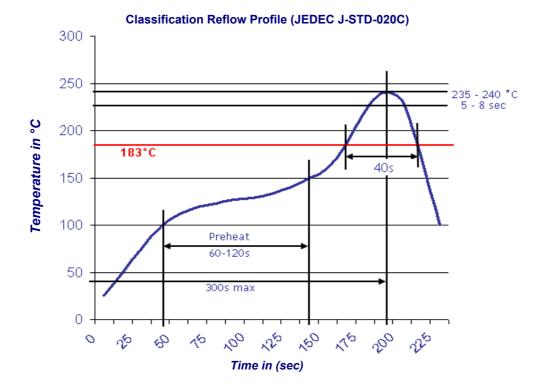



SMT Blinking Chip LED Orange Part No : M11N6011											
					Part No.: <b>M11N6011</b>						
					Custome	er:					
DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	05.12.2009				
APPD:	Ping			FINISH	Hui	Sheet	5 from 9				
		Copyright by EDCON-COMPONENTS									


www.edcon-components.com





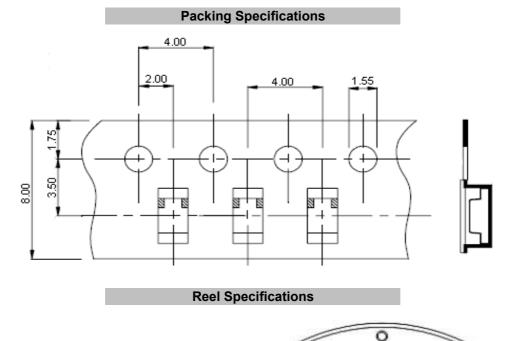

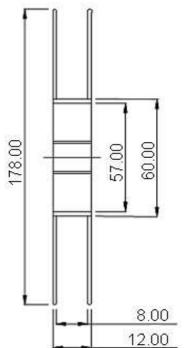

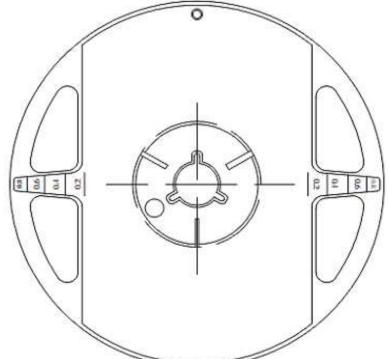

					SMT Blinking Chip LED Orange		
					Part No.: <b>M11N6011</b>		
					Custome	er:	
DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	05.12.2009
APPD:	Ping			FINISH	Hui	Sheet	6 from 9

www.edcon-components.com

Copyright by EDCON-COMPONENTS







#### **Handling Precautions**

Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although ist characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might leads to damage and premature failure of th LED.

1. Handle the component along the side surfaces by using forceps or appropriate tools



2. Do not directly touch or handle the silicone lens surfance. It may damage the internal circuitry.

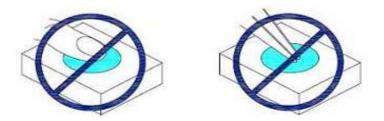

3. Do not stack together assembled PCBs containing exposed LEDs. Outside impact may scratch the silicone lens or damage the internal circuitry.




				SMT	Blinking Chip Orange	LED	
					Part No.	.: M11N	N6011
					Custome	er:	
DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	05.12.2009
APPD:	Ping			FINISH	Hui	Sheet	7 from 9
			Convright by F	DCON-COMPC	NENTS		





- 4. The outer diameter of the TOP LED pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible.
- 5. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.
- 6. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.

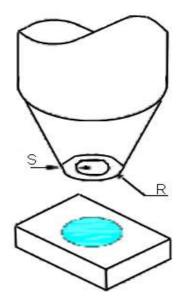


	SMT Blinking Chip LED Orange						LED
					Part No.: <b>M11N6011</b>		
					Custome	er:	
DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	05.12.2009
APPD:	Ping			FINISH	Hui	Sheet	8 from 9
			Copvriaht by E	DCON-COMPO	NENTS		





Color table curve

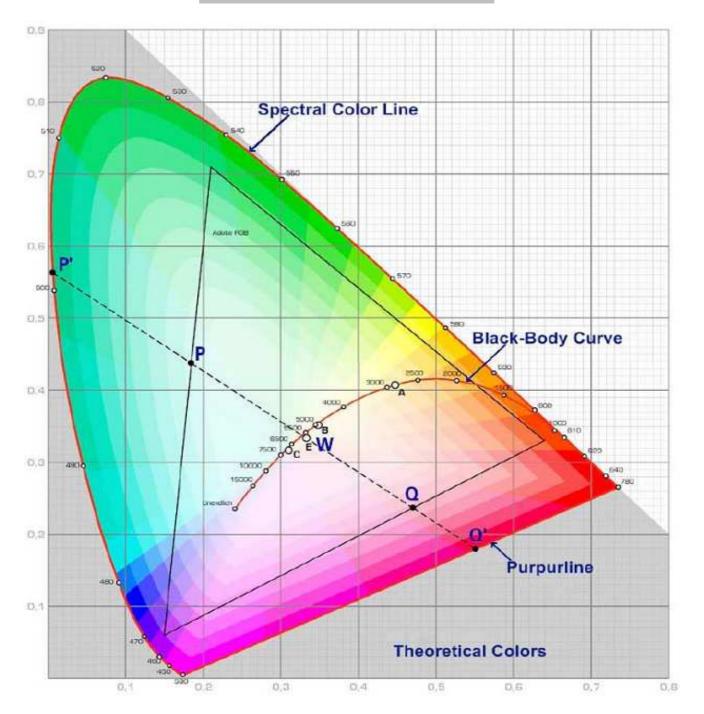

					SMT	Blinking Chip Orange	) LED		
					Part No.: <b>M11N6011</b>				
					Custome	er:			
DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	05.12.2009		
APPD:	Ping			FINISH	Hui	Sheet	9 from 9		
	Copyright by EDCON-COMPONENTS								