

# Data Sheet

## Screwless Terminal Block

**Pitch: 5,08 mm**

**Serie: A11M007**

### Customer Information for special Item

**EDCON Customer : 0**

**Customer Version No. : 0**

# EDCON-COMPONENTS



## Technical Discription

## Drawing (Dimension in mm)

### Electrical

Standard UL, VDE  
 Rated voltage 300V  
 Rated current 15A  
 Wire range 28-12 AWG

### Mechanical


Operating temperature -40°C ~ +105°C

### Dimensions

Pitch 5.08mm  
 Poles 2P - 24P

### Material

Housing Nylon PA66 (UL94V-0)  
 Pin header Brass, Tin plated  
 Wire guard Stainless steel

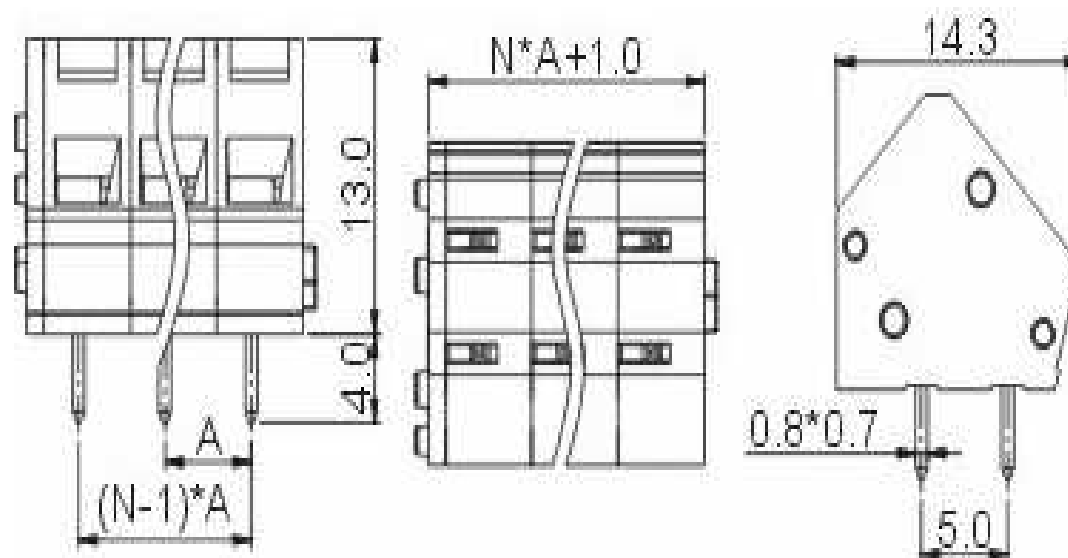

### Screwless Terminal Block

Part No.: **A11M007**

Customer:


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

# EDCON-COMPONENTS



PCB Layout (Dimension in mm)

Dimensions (mm)

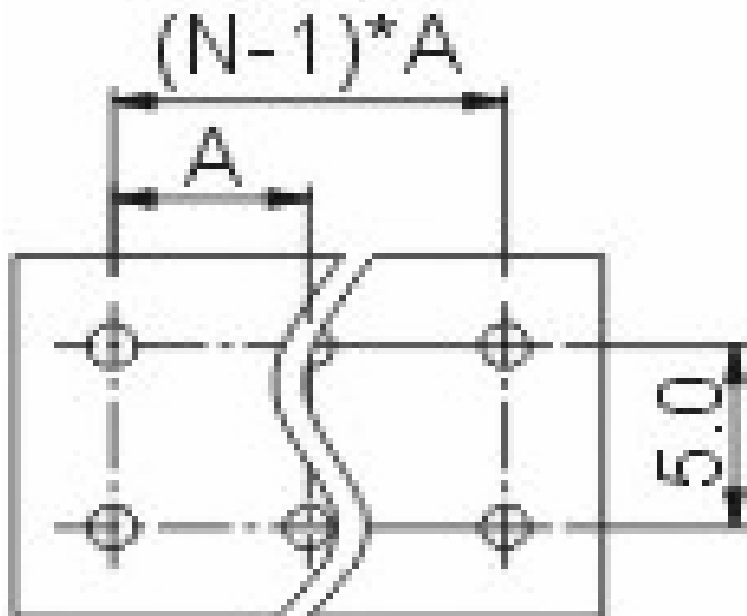

No. of Pos.	A	Tol. P	B	Tol. P
02	11,16	± 0,35	5,08	± 0,35
03	16,24	± 0,35	10,16	± 0,35
04	21,32	± 0,35	15,24	± 0,35
05	26,40	± 0,35	20,32	± 0,35
06	31,48	± 0,35	25,40	± 0,35
07	36,56	± 0,35	30,48	± 0,35
08	41,64	± 0,35	35,56	± 0,35
09	46,72	± 0,35	40,64	± 0,35
10	51,80	± 0,35	45,72	± 0,35
11	56,88	± 0,35	50,80	± 0,35
12	61,96	± 0,35	55,88	± 0,35
13	67,04	± 0,35	60,96	± 0,35
14	72,12	± 0,35	66,04	± 0,35
15	77,20	± 0,35	71,12	± 0,35
16	82,28	± 0,35	76,20	± 0,35
17	87,36	± 0,35	81,28	± 0,35
18	92,44	± 0,35	86,36	± 0,35
19	97,52	± 0,35	91,44	± 0,35
20	102,60	± 0,35	96,52	± 0,35
21	107,68	± 0,35	101,60	± 0,35
22	112,76	± 0,35	106,68	± 0,35
23	117,84	± 0,35	111,76	± 0,35
24	122,92	± 0,35	116,84	± 0,35

**Screwless Terminal Block**

Part No.: **A11M007**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 4	Customer:

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS



## Ordering Informations

Serie	No. of Pos.	Body Color	Approval	Approval Code	ROHS	Packing	EDCON Cust. No.	Customer Version		
<b>A11M007</b>	<b>02</b>	<b>GY</b>	<b>N</b>	<b>N</b>	<b>R</b>	<b>B</b>				

Pitch  
5,08

<b>02=</b> Number of Pos. Standard 2~24 Pos.	<b>GY=</b> Gray (Standard)  <b>GN=</b> Green  <b>OR=</b> Orange  <b>BK=</b> Black	<b>N=</b> No Approval  <b>1=</b> Approval for Material  <b>2=</b> Approval for Terminal Block	<b>N=</b> NON Approval  <b>A=</b> UL /UR Approval Please consult EDCON for available  <b>B=</b> VDE Approval Please consult EDCON for available  <b>C=</b> TÜV Approval Please consult EDCON for available	<b>R=</b> ROHS Conform  <b>N=</b> NON ROHS Conform	<b>B=</b> Standard Package  <b>I=</b> Individual Package	<b>xxxxxx=</b> Customer Number	<b>xxx=</b> Customer Version ??(Printing)
---	---	---	--	--	--	--------------------------------	---

**Screwless Terminal Block**

Part No.: **A11M007**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

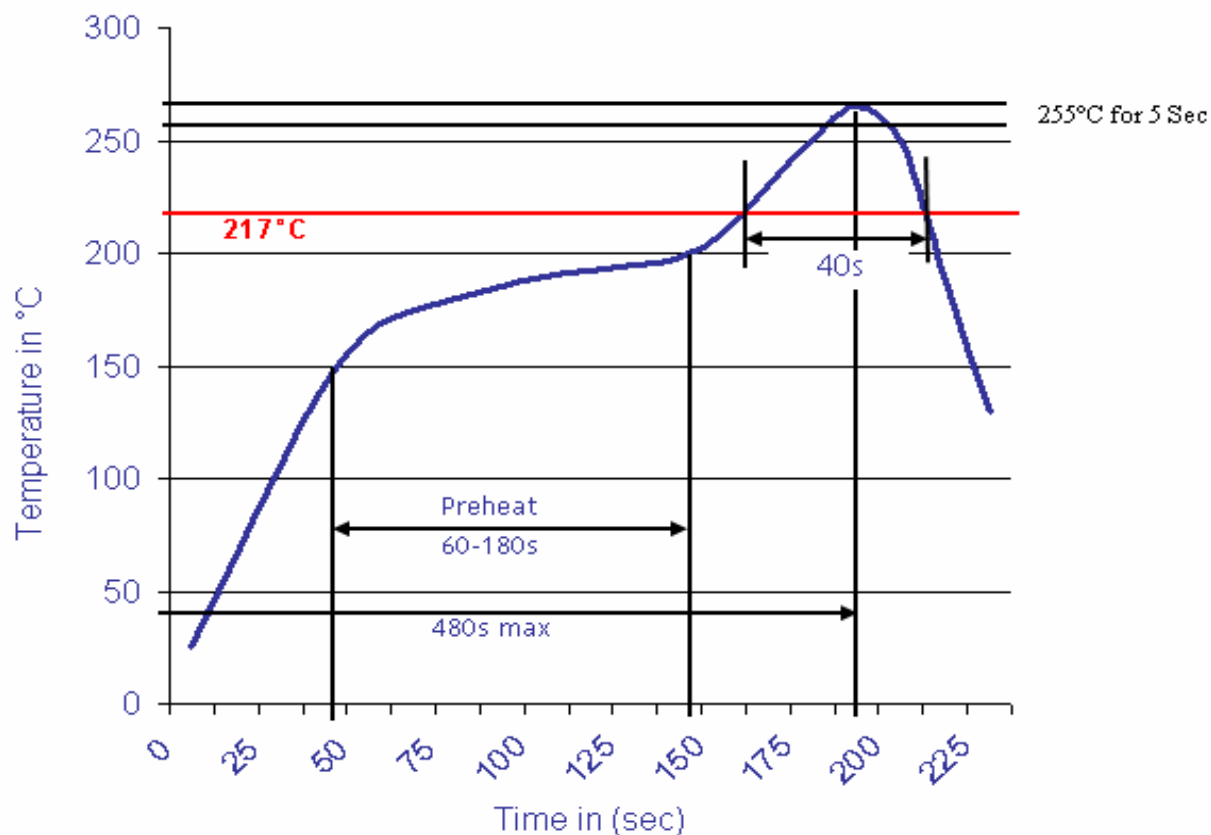

**Screwless Terminal Block**

Part No.: **A11M007**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	Customer:



