

Code

EDCON-COMPONENTS



## Features

Inductive proximity sensor.

Style: cylinder shape M5, M8, M12, M18, M30 various rectangular shape and protruding shape.

Shielded or unshielded type.

DC 2-wire (10-30V DC), DC3-wire (10-30V DC), DC-4Wire (10-30V DC), AC 2-wire (90-250V AC) type.

Connection Mode: 3 or 4 wires or 3 or 4 pin M8 or M12 connector.

With LED operation indicator, easily identifiable.

Brass nickle plated, proof of oil, water acid, alkaline.

Standard sensing object: inductive sensor: ferrous metals;


capacitive sensor: metal or non metals objects.

Protection IP-rate: IP67, water resistant:

Over-load and short circuit protection; polarity reversal protection.

Widely applied in measuring, Counting, RPpm measuring in mechanismus, chemical paper manufacture light industry, etc.

## Technical Dimension

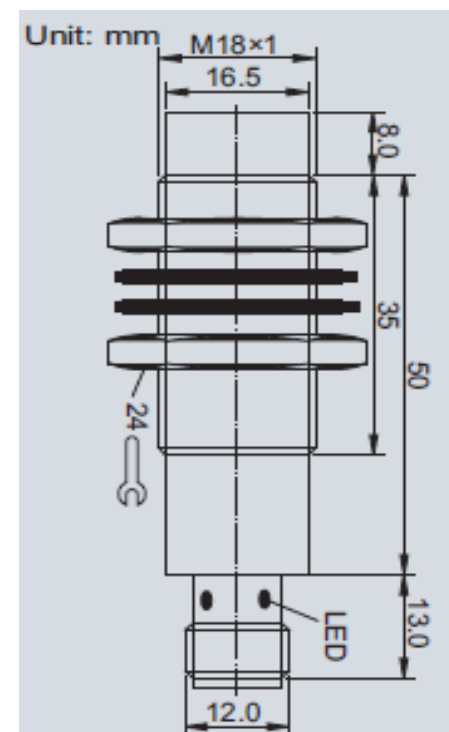

## INDUCTIVE Proximity Sensor

Part No.: 25A1025

Customer:

DRW:	Jimmy	CHKD	Ban	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2009
APPD:	Johnson			FINISH	Jamy		Sheet No.	1 from 5	

[www.edcon-components.com](http://www.edcon-components.com)

email: info@edcon-components.com

# EDCON-COMPONENTS




## Technical Discription

Dimension :	M18x1
Installation	NON-Flush (unshielded)
Mounting Distance Sn	8,0mm
Detect distance Sa	0 - 6,4mm
Rated Operating Voltage	24 VDC / 220VAC
Supply Voltage	10 ~ 30VDC / 90-250VAC
Voltage Drop	≤ 2V
Rated Insulation Voltage	≥ 20M Ω
Load current capacity	200mA / 300mA
Off-state current (NPN/PNP)	≤ 10mA
Leak current	≤ 20μA
Against polarity reversal	YES
Short circuit protected	3wires: YES / 2wires: NO
Load capacity	≤ 1μF
Repeated accuracy	≤ 5%
Ambient temperature range	.-25°C ~ +70°C
Operating frequency	700Hz / 400Hz / 25Hz
Function indication	RED Led Indicator
IP ratings	IP67
Housing Material	Brass nickel plated ABS Housing MOQ on request


Material of sensing face	ABS
Connection	
No of wires & gauge	12x0,16mm
Standard length of cable	2,0M
Plug-in connector	M12 3/4 Pos. Code A/B
Approvals	CE

## Connection Mode


### Output Code A or B

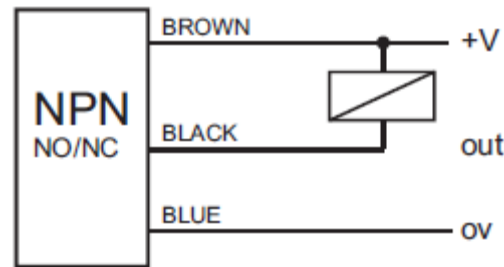


### Output Mode Code E

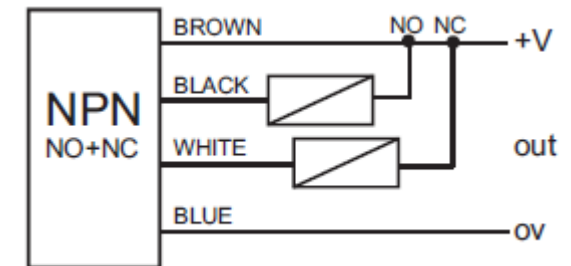

### Output Mode Code C or D

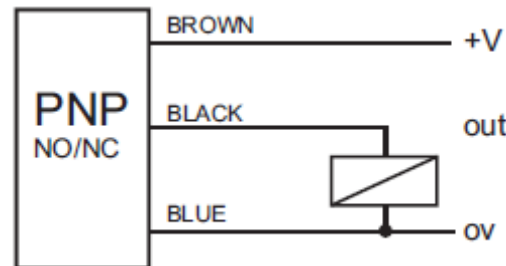

### Output Mode Code F

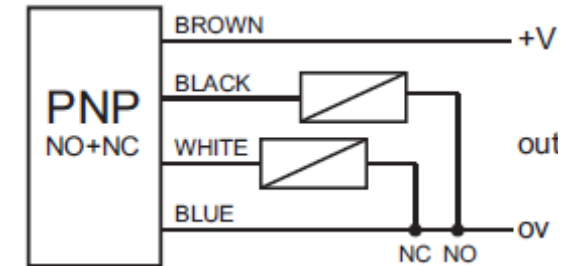

## INDUCTIVE Proximity Sensor

Part No.: **25A1025**

Customer:

DRW:	Jimmy	CHKD	Ban	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2009
APPD:	Johnson			FINISH	Jamy		Sheet No.	2 from 5	

[www.edcon-components.com](http://www.edcon-components.com)


email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS




## Inductive Proximity Application Direction

- A:** Mounting distance should be set equal 80% SN.  
**B:** Set mounting distance equals 50% sn,when sensor applies in measuring mounting frequency or operating in high speed circumstance:  
**C:** Mounting distance varies with measuring object (iron, stainless steel, brass, copper and aluminium).

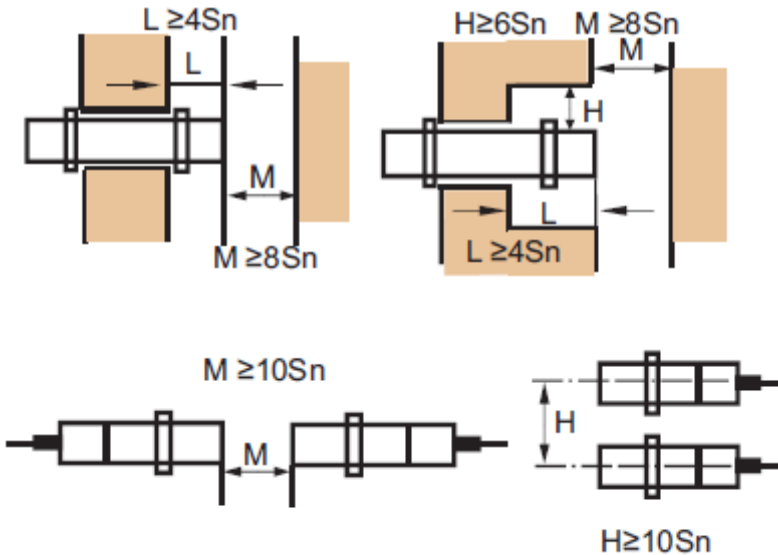


## Connection Mode

### Output Mode Code G or H

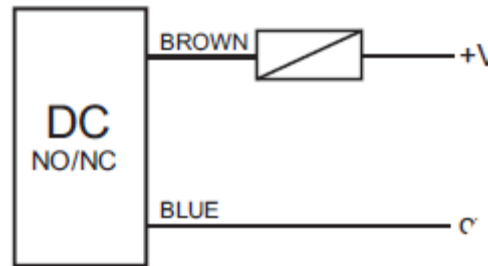

### Output Mode Code J or K

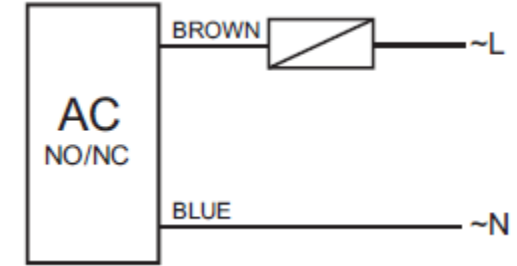

## INDUCTIVE Proximity Sensor

Part No.: **25A1025**

Customer:

DRW:	Jimmy	CHKD	Ban	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2009
APPD:	Johnson			FINISH	Jamy		Sheet No.	3 from 5	



[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)


# EDCON-COMPONENTS



## Mounting distance

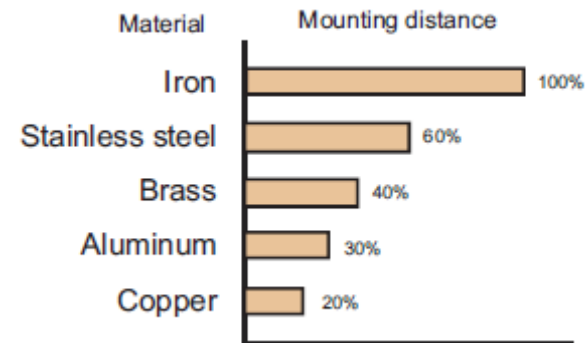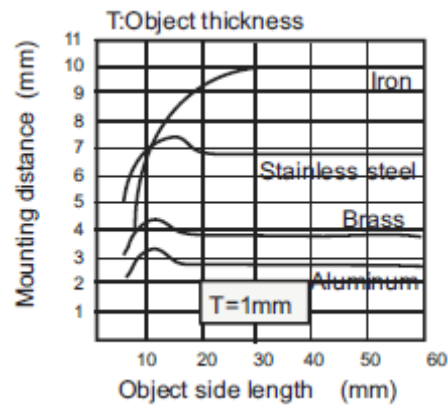

## D: Inductive Proximity series connection and parallel connection.

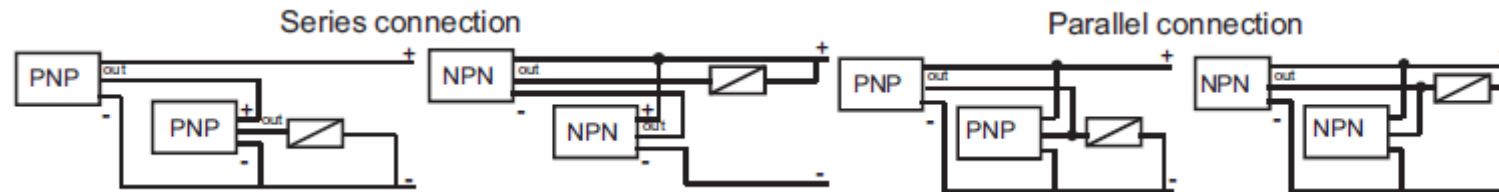

### INDUCTIVE Proximity Sensor

Part No.: **25A1025**

DRW:	Jimmy	CHKD	Ban	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2009
APPD:	Johnson			FINISH	Jamy		Sheet No.	4 from 5	

Customer: email: [info@edcon-components.com](mailto:info@edcon-components.com)

[www.edcon-components.com](http://www.edcon-components.com)

# EDCON-COMPONENTS



## Ordering Informations

Serie	Connector	Connector Size	Zylinder Size	Output Mode	Detect Distance	Output Current	Body Sensor Length	Housing	Cable length	
-------	-----------	----------------	---------------	-------------	-----------------	----------------	--------------------	---------	--------------	--

<b>25A1025</b>	<b>B</b>	<b>D</b>	<b>M18</b>	<b>A</b>	<b>08</b>	<b>B</b>	<b>L</b>	<b>B</b>	<b>0000</b>	
----------------	----------	----------	------------	----------	-----------	----------	----------	----------	-------------	--

		<b>M18=</b> M18x1	<b>A=</b> NPN-NO			<b>L=</b> Large Sensor	<b>B=</b> Brass Housing	<b>0000=</b> without Cable
<b>B=</b> Straight Connector			<b>B=</b> NPN-NC		<b>B=</b> 200mA		<b>A=</b> ABS Housing MOQ on request	<b>2001=</b> Standard Cable length is 2000mm other length available please fill in
			<b>C=</b> PNP-NO		<b>C=</b> 300mA			
	<b>D=</b> M12 3P Connector Code A		<b>D=</b> PNP-NC					
	<b>E=</b> M12 3P Connector Code B		<b>E=</b> NPN-NO+NC	<b>08=</b> 8mm				
	<b>F=</b> M12 4P Connector Code A		<b>F=</b> PNP-NO+NC					
	<b>G=</b> M12 4P Connector Code B		<b>G=</b> DC2 Wire NO					
			<b>H=</b> DC2 Wire NC					
			<b>J=</b> AC2 Wire NO					
			<b>K=</b> AC2 Wire NC					

For special request of sensors (e.g. 24V AC appearance, function), please indicate when order.

## INDUCTIVE Proximity Sensor

Part No.: **25A1025**

DRW:	Jimmy	CHKD	Ban	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2009
APPD:	Johnson			FINISH	Jamy		Sheet No.	5 from 5	

Customer: