

Code

EDCON-COMPONENTS



Features

Inductive proximity sensor.

Style: cylinder shape M5, M8, M12, M18, M30 various rectangular shape and protruding shape.

Shielded or unshielded type.

DC 2-wire (10-30V DC), DC3-wire (10-30V DC), DC-4Wire (10-30V DC), AC 2-wire (90-250V AC) type.

Connection Mode: 3 or 4 wires or 3 or 4 pin M8 or M12 connector.

With LED operation indicator, easily identifiable.

Brass nickle plated, proof of oil, water acid, alkaline.


Standard sensing object: inductive sensor: ferrous metals; capacitive sensor: metal or non metals objects.

Protection IP-rate: IP67, water resistant:

Over-load and short circuit protection; polarity reversal protection.

Widely applied in measuring, Counting, RPpm measuring in mechanismus, chemical paper manufacture light industry, etc.

Technical Dimension

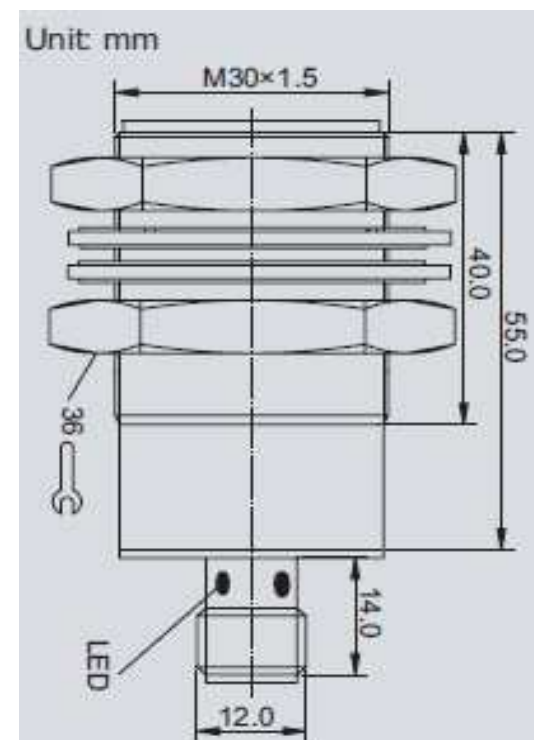

INDUCTIVE Proximity Sensor

Part No.: 25A1032

Customer:

DRW:	Jimmy	CHKD	Ban	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2009
APPD:	Johnson			FINISH	Jamy		Sheet No.		1 from 5

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Technical Discription

Dimension :	M30x1,5
Installation	Flush (shielded)
Mounting Distance Sn	10,0mm
Detect distance Sa	0 - 9,0mm
Rated Operating Voltage	24 VDC / 220VAC
Supply Voltage	10 ~ 30VDC / 90-250VAC
Voltage Drop	≤ 2V
Rated Insulation Voltage	≥ 20M Ω
Load current capacity	200mA / 300mA
Off-state current (NPN/PNP)	≤ 10mA
Leak current	≤ 20μA
Against polarity reversal	YES
Short circuit protected	3wires: XES / 2wires: NO
Load capacity	≤ 1μF
Repeated accuracy	≤ 5%
Ambient temperature range	.-25°C ~ +70°C
Operating frequency	500Hz /400Hz /25Hz
Function indication	RED Led Indicator
IP ratings	IP67
Housing Material	Brass nickel plated ABS Housing MOQ on request

Material of sensing face ABS

Connection

No of wires & gauge

Standard length of cable

Plug-in connector M12 3/4Pol. Code A/B


Approvals CE

DRW:	Jimmy	CHKD	Ban	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2009
APPD:	Johnson			FINISH	Jamy		Sheet No.	2 from 5	


www.edcon-components.com

Connection Mode


Output Code A or B

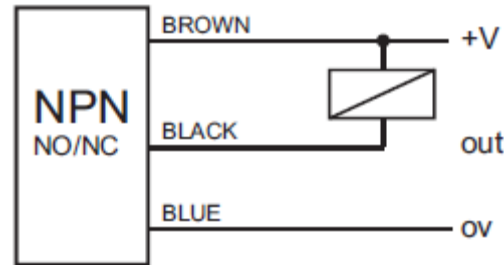


Output Mode Code E

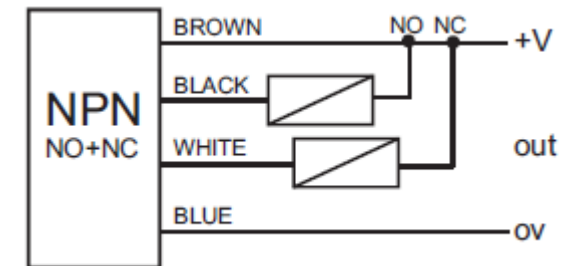

Output Mode Code C or D

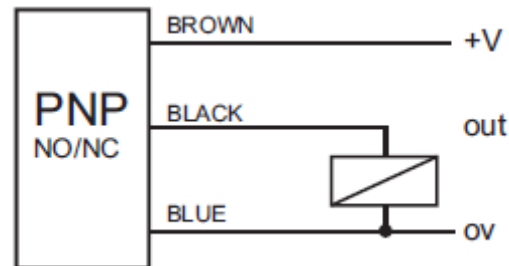

Output Mode Code F

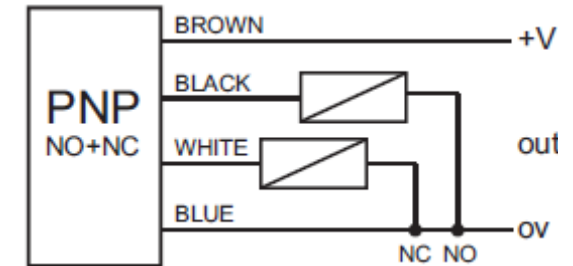

INDUCTIVE Proximity Sensor

Part No.: 25A1032

Customer:


email: info@edcon-components.com

EDCON-COMPONENTS




Inductive Proximity Application Direction

- A:** Mounting distance should be set equal 80% SN.
B: Set mounting distance equals 50% sn,when sensor applies in measuring mounting frequency or operating in high speed circumstance:
C: Mounting distance varies with measuring object (iron, stainless steel, brass, copper and aluminium).

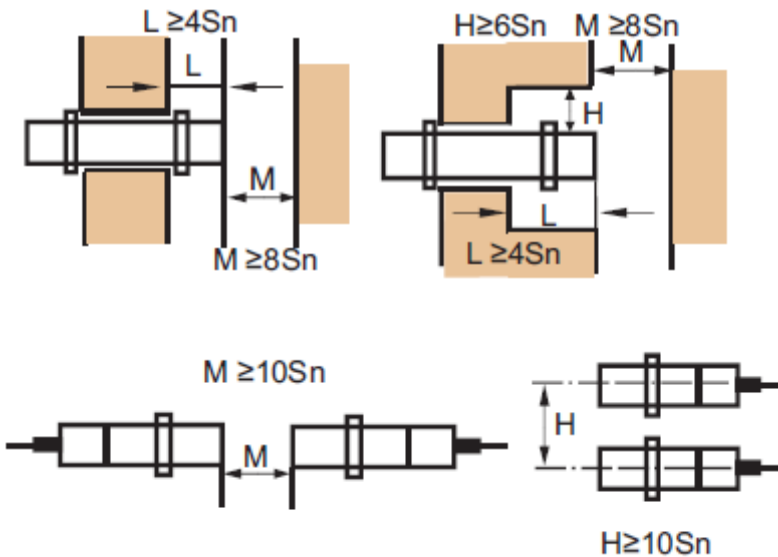


Connection Mode

Output Mode Code G or H

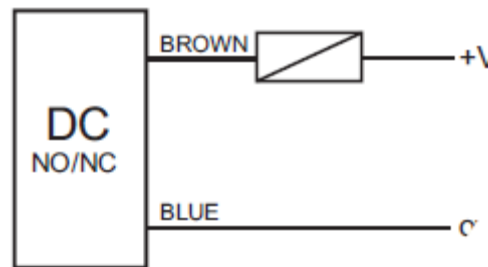

Output Mode Code J or K

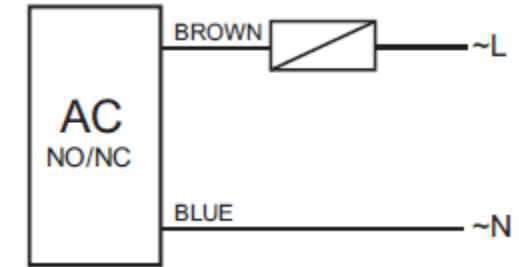

INDUCTIVE Proximity Sensor

Part No.: **25A1032**

Customer:

DRW:	Jimmy	CHKD	Ban	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2009
APPD:	Johnson			FINISH	Jamy		Sheet No.	3 from 5	



www.edcon-components.com

email: info@edcon-components.com


EDCON-COMPONENTS



Mounting distance

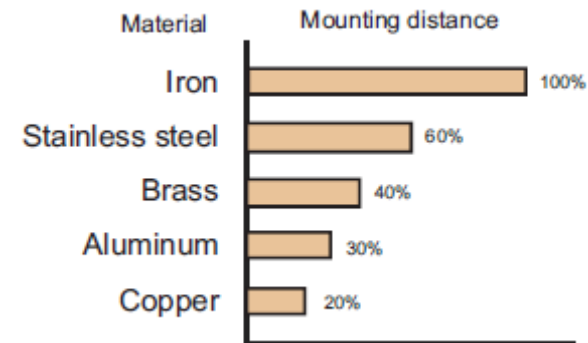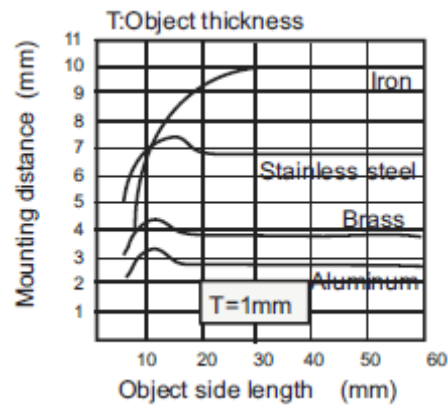

D: Inductive Proximity series connection and parallel connection.

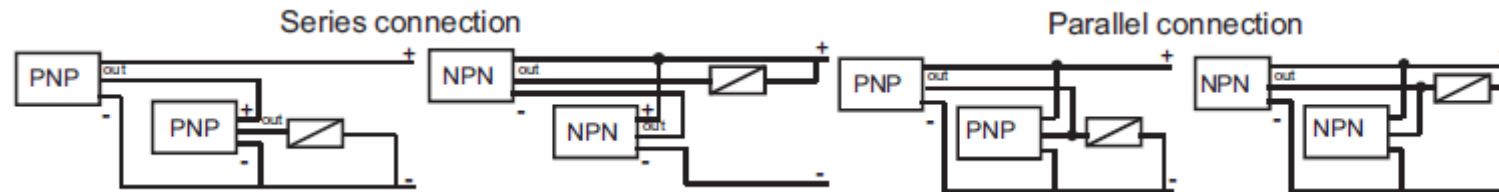

INDUCTIVE Proximity Sensor

Part No.: **25A1032**

DRW:	Jimmy	CHKD	Ban	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2009
APPD:	Johnson			FINISH	Jamy		Sheet No.		4 from 5

Customer:

EDCON-COMPONENTS



Ordering Informations

Serie	Connector	Connector Size	Zylinder Size	Output Mode	Detect Distance	Output Current	Body Sensor Length	Housing	Cable length	
-------	-----------	----------------	---------------	-------------	-----------------	----------------	--------------------	---------	--------------	--

25A1032	B	D	M30	A	10	B	L	B	0000	
----------------	----------	----------	------------	----------	-----------	----------	----------	----------	-------------	--

		M30= M30x1,5	A= NPN-NO			L= Large Sensor	B= Brass Housing	0000= without Cable
B= Straight Connector			B= NPN-NC		B= 200mA		A= ABS Housing MOQ on request	2001= Standard Cable length is 2000mm other length available please fill in
			C= PNP-NO		C= 300mA			
	D= M12 3P Connector Code A		D= PNP-NC					
	E= M12 3P Connector Code B		E= NPN-NO+NC					
	F= M12 4P Connector Code A		F= PNP-NO+NC	10= 10mm				
	G= M12 4P Connector Code B		G= DC2 Wire NO					
			H= DC2 Wire NC					
			J= AC2 Wire NO					
			K= AC2 Wire NC					

For special request of sensors (e.g. 24V AC appearance, function), please indicate when order.

INDUCTIVE Proximity Sensor

Part No.: **25A1032**

DRW:	Jimmy	CHKD	Ban	MATL:	Wilson	TOLERANCE	Mason	DATE	10.08.2009
APPD:	Johnson			FINISH	Jamy		Sheet No.	5 from 5	

Customer: email: info@edcon-components.com

www.edcon-components.com