




**Applications**

- Interior automotive lighting
- Optical indicators
- Communication Products
- Backlighting
- Toys

**Technical Drawing**

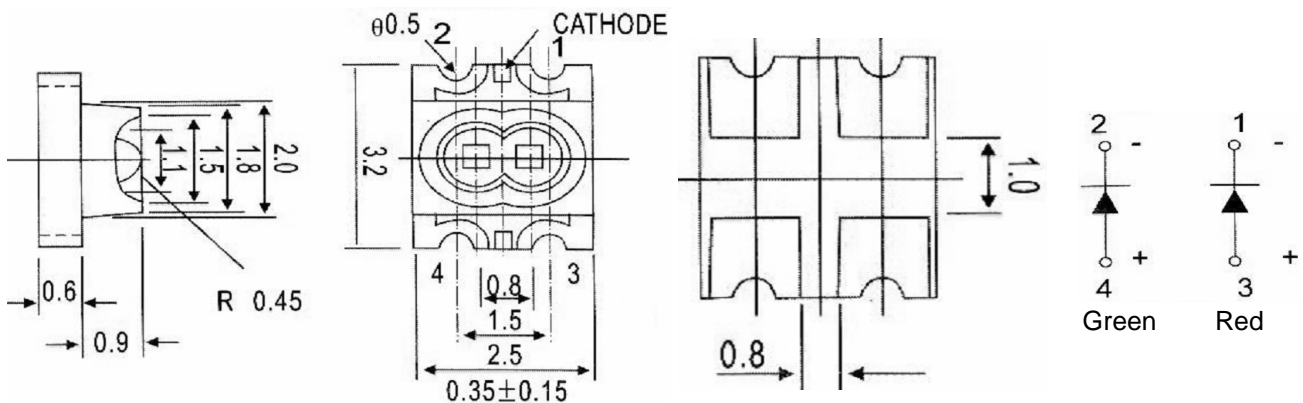


**Recommended Soldering Pattern**

**Notes :**

All dimensions in mm tolerance is  $\pm 0.1\text{mm}$  unless otherwise noted.

<b>SMT Top View LED</b>	
<b>Green</b>	<b>Red</b>
Part No.:	<b>M11G7003</b>
Customer:	

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	1 from 9



**Absolute Maximum Ratings**

Ta=25°C

Item	Symbol	GaP	GaA / As	Unit
Power Dissipation	P <sub>D</sub>	72		mW
DC Forward Current	I <sub>F</sub>	30		mA
Plused Forward Current	I <sub>FP</sub> *	100		mA
Reverse Voltage	V <sub>R</sub>	5		V
Operating Temperature	T <sub>OP</sub>	-30 to 80		°C
Storage Temperature	T <sub>ST</sub>	-40 to 85		°C

\* 0.1 msec pulse, 10% duty cycle

**Electrcal / Optical Characteristics**

I<sub>F</sub>=5mA Ta=25°C

Ermitting Color Material	Green		Red	
		GaP	GaA / As	
Forward Voltage	typ.	2.1	2.0	V <sub>F</sub>
	max.	2.4	2.4	V <sub>F</sub>
Wavelength typ.	λ <sub>D</sub>	571	625	nm
	λ <sub>P</sub>	---	---	nm
	Δλ	---	---	nm
Color Temperature	min.	---	---	K
	max.	---	---	K
Luminous Intensity *	min.	14	7	mcd
	typ.	21	18	mcd
Reverse Current	max.	---		μA
Viewing Angle	2Θ1/2	120		


\* Per NIST standards

<b>SMT Top View LED</b>	
<b>Green</b>	<b>Red</b>
Part No.:	<b>M11G7003</b>
Customer:	

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	2 from 9



**Curve**

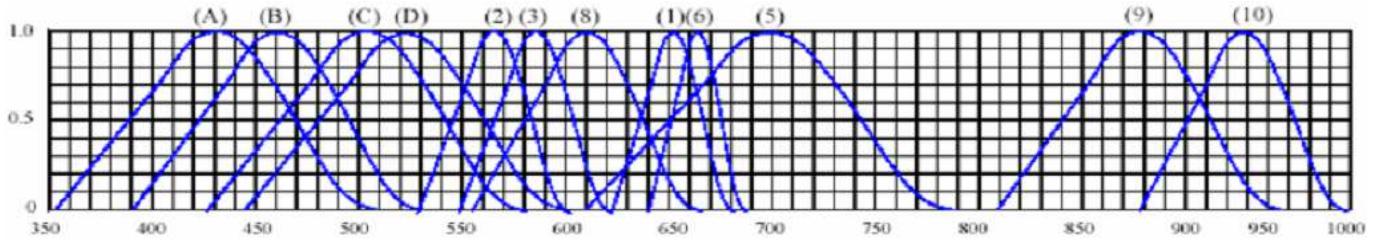

Wavelength ( nm )

**Relative Intensity vs Wavelength**

( 1 )	GaAsP / GaAs 655nm Red	( 9 )	GaAlAs 880nm
( 2 )	GaP 568nm Yellow Green	( 10 )	GaAs & GaAlAs 940nm
( 3 )	GaAsP / GaP 585nm Yellow	( A )	GaN 430nm Blue
( 4 )	GaAsP / GaP 635nm Orange & Red	( B )	InGaN 470nm Blue
( 5 )	GaP 700nm Red	( C )	InGaN 502nm Green
( 6 )	GaAlAs / GaAs 660nm Red	( D )	InGaN 523nm Green
( 8 )	GaAsP / GaP 610nm Red		

**SMT Top View LED**  
*Green* *Red*

Part No.: **M11G7003**


Customer:

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	3 from 9




**Curve**



FORWARD CURRENT VS. FORWARD VOLTAGE

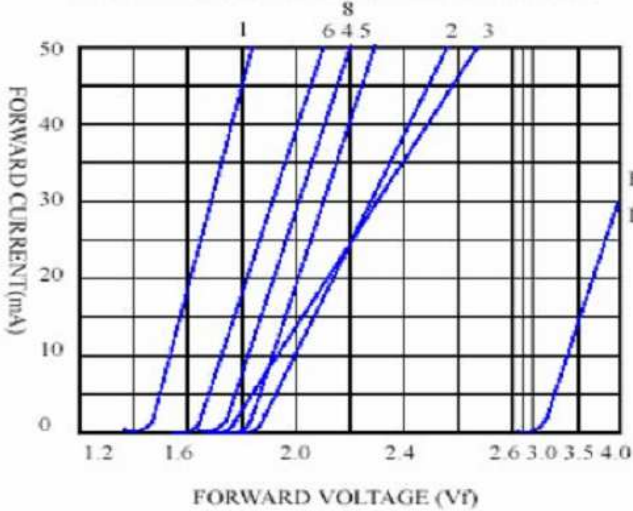

RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

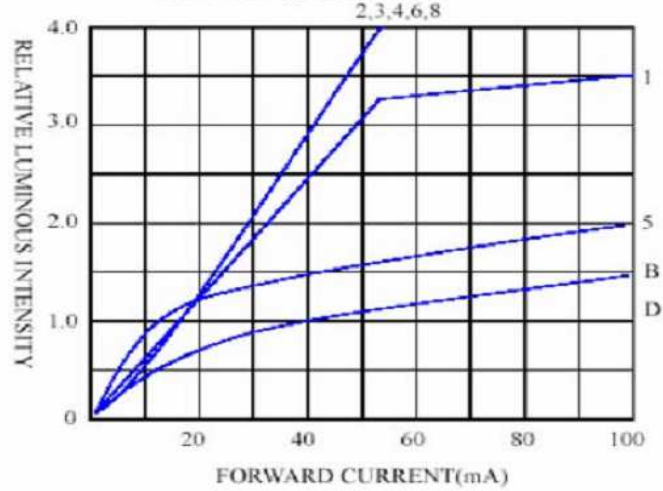


FORWARD CURRENT VS. AMBIENT TEMPERATURE

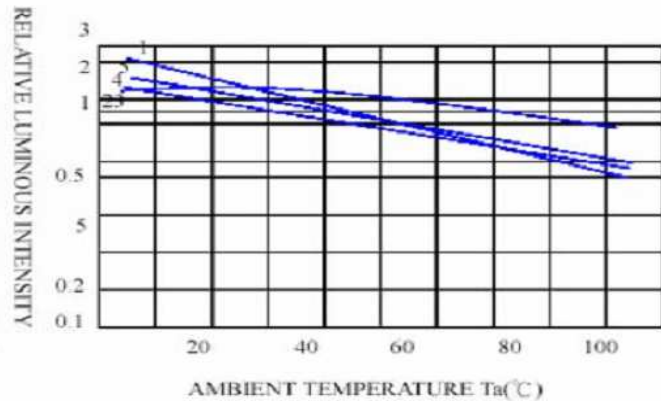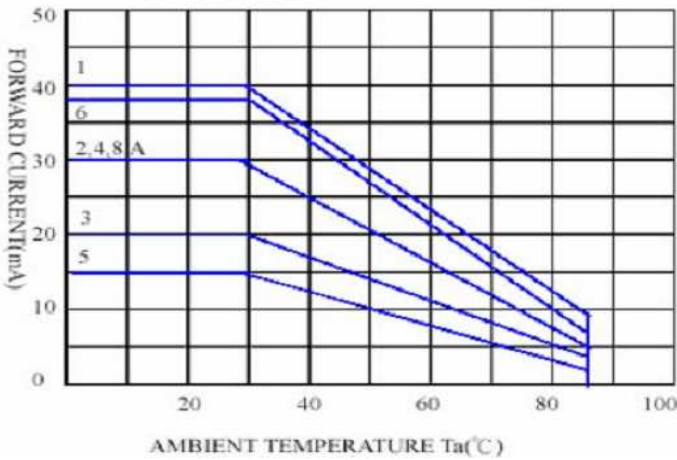


<b>SMT Top View LED</b>	
<b>Green</b>	<b>Red</b>
Part No.:	<b>M11G7003</b>
Customer:	

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	4 from 9



**Solder Condition**

**Lead Free Solder**

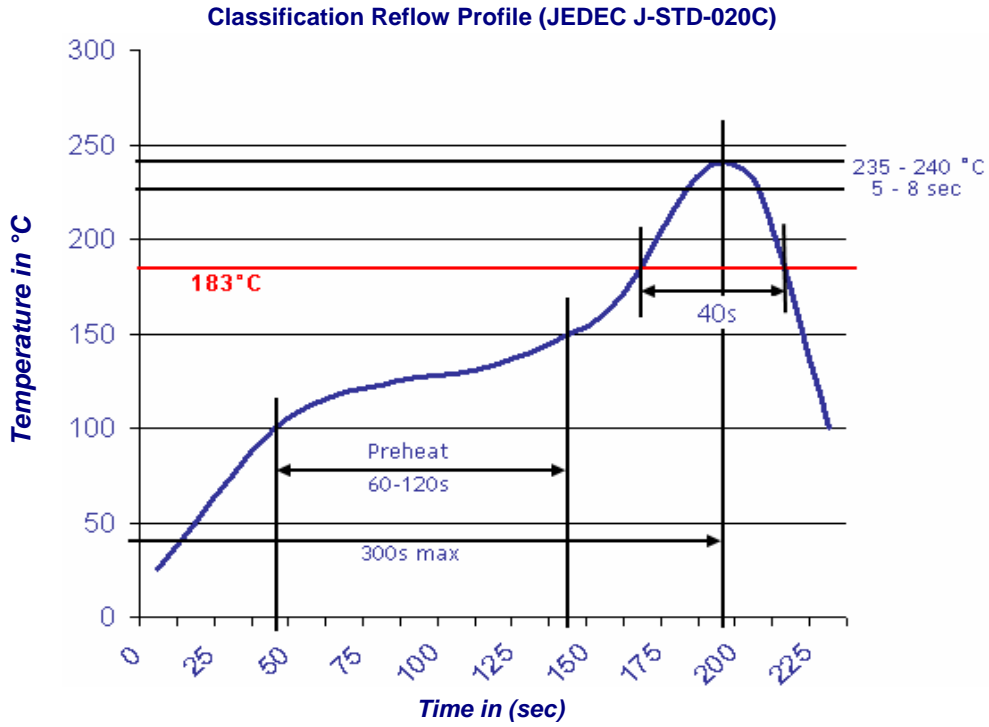


<b>SMT Top View LED</b>	
<b>Green</b>	<b>Red</b>
Part No.:	<b>M11G7003</b>
Customer:	


DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	5 from 9



**Packing Specifications**

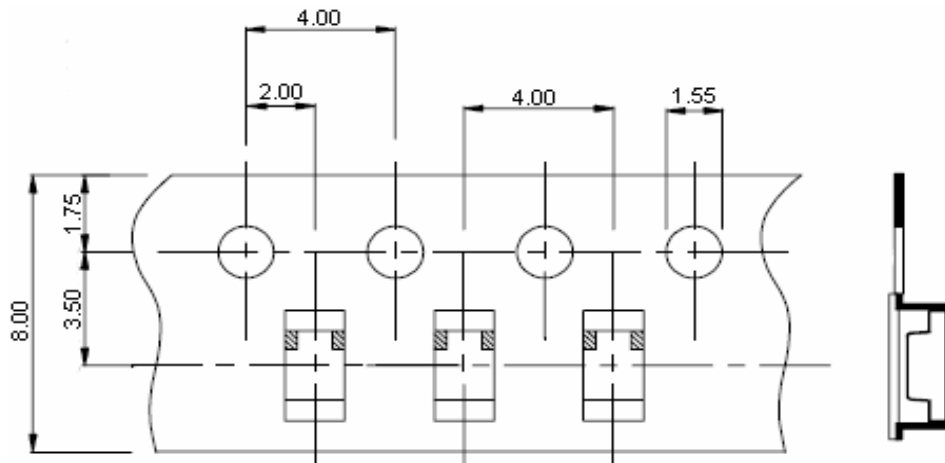

**Reel Specifications**

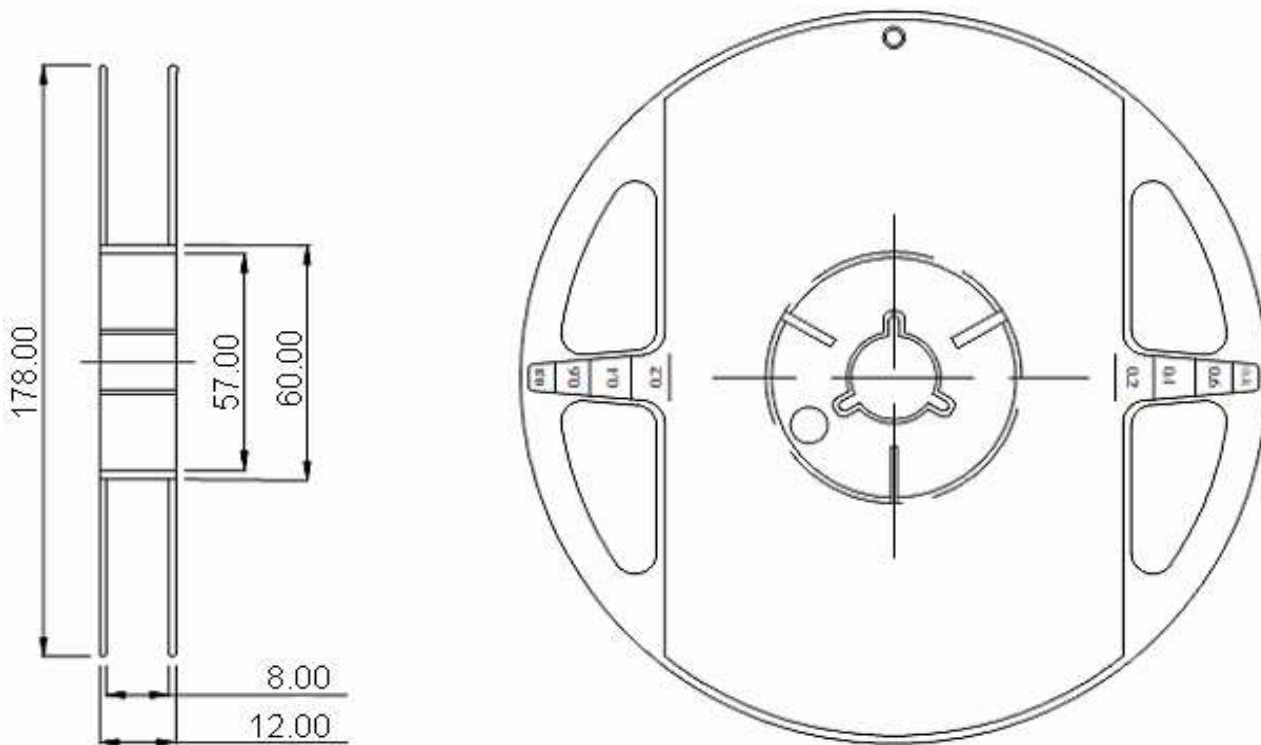

<b>SMT Top View LED</b>	
<b>Green</b>	<b>Red</b>
Part No.:	<b>M11G7003</b>
Customer:	

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	6 from 9






**Handling Precautions**

Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED.


1. Handle the component along the side surfaces by using forceps or appropriate tools

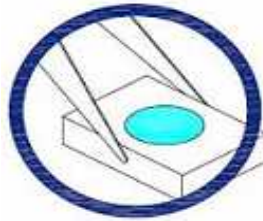

2. Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry.



3. Do not stack together assembled PCBs containing exposed LEDs. Outside impact may scratch the silicone lens or damage the internal circuitry.




<b>SMT Top View LED</b>	
<b>Green</b>	<b>Red</b>
Part No.:	<b>M11G7003</b>
Customer:	

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	7 from 9



4. The outer diameter of the TOP LED pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible.
5. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.
6. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.

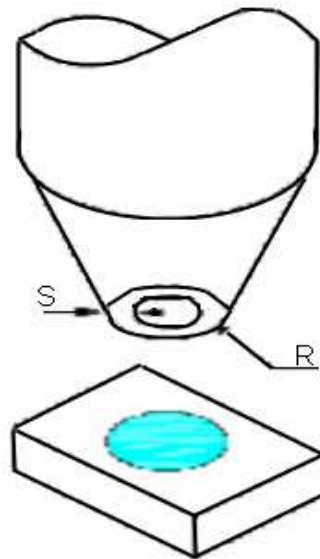


<b>SMT Top View LED</b>	
<b>Green</b>	<b>Red</b>
Part No.:	<b>M11G7003</b>
Customer:	

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	8 from 9





**Color table curve**

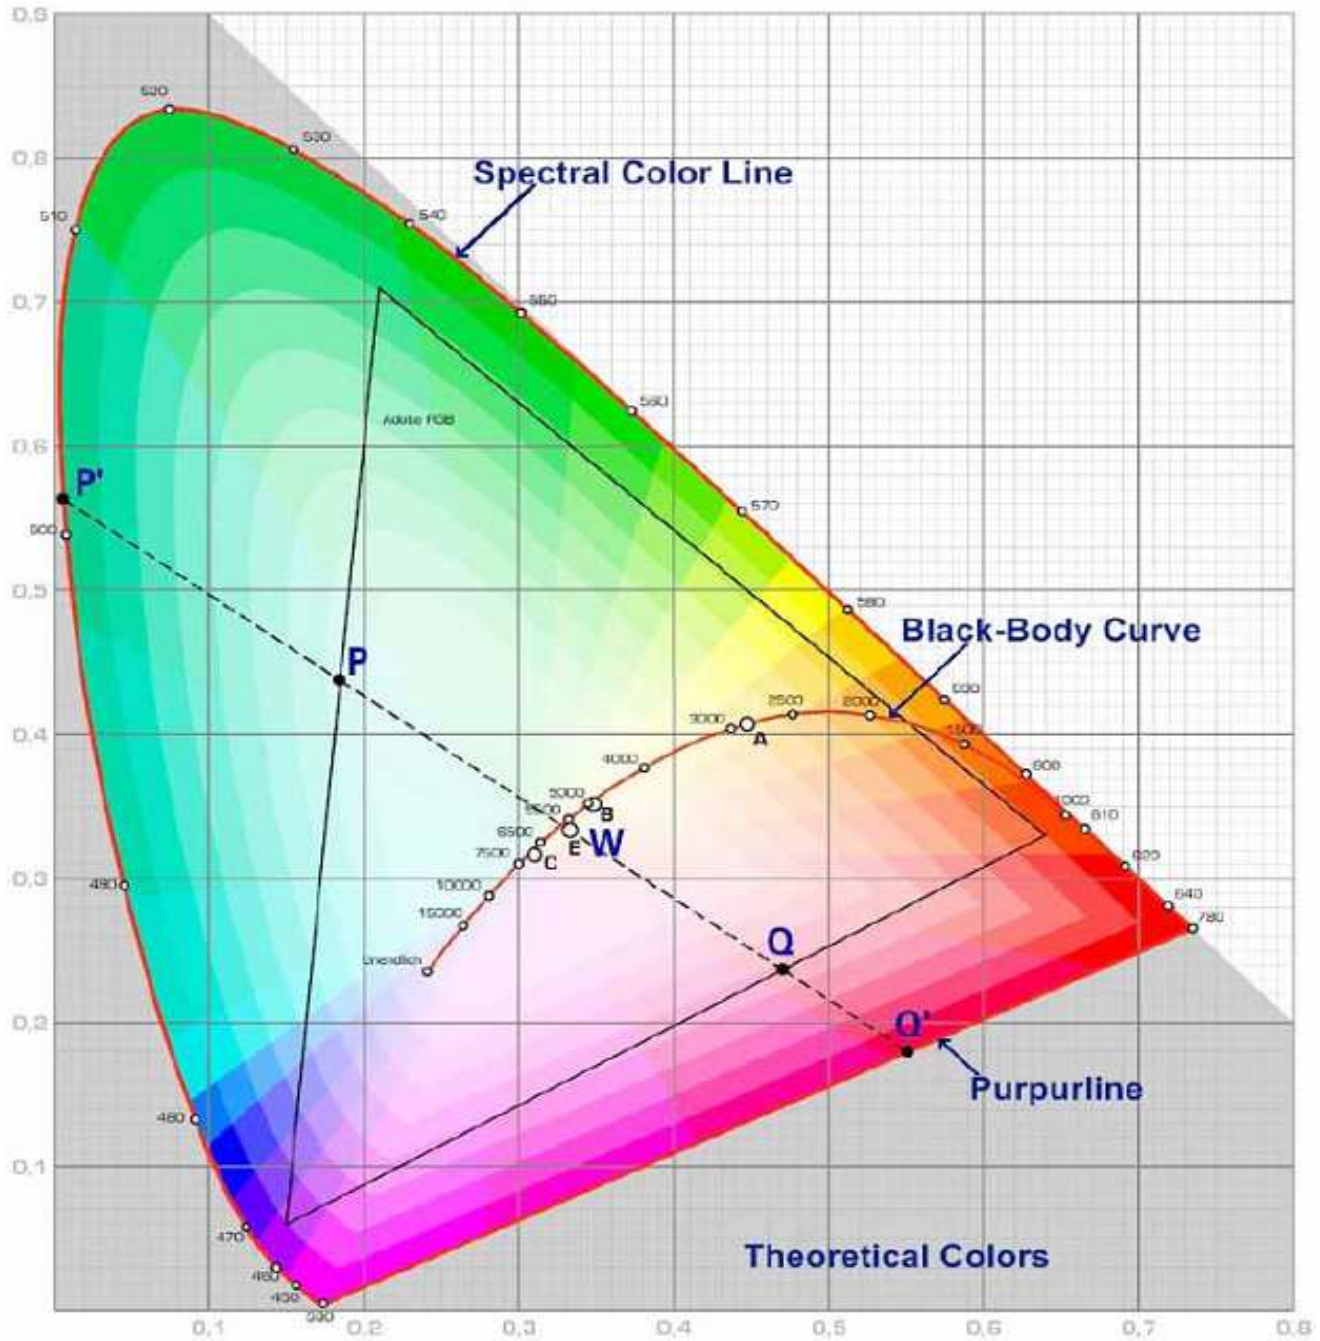

<b>SMT Top View LED</b>	
<b>Green</b>	<b>Red</b>
Part No.:	<b>M11G7003</b>
Customer:	

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	9 from 9