








### **Applications**

Interior automotive lighting
 Optical indicators
 Communication Products
 Backlighting
 Toys

### **Technical Drawing**

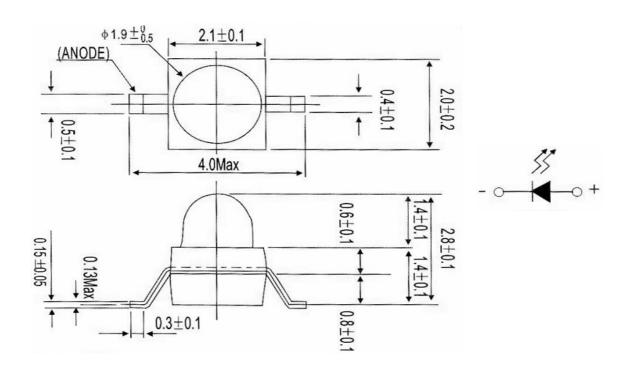

### **Recommended Soldering Pattern**

### Notes:

All dimensions in mm tolerance is  $\pm 0.1$ mm unless otherwise noted.

# Round Subminiature Gull Wing Lead ( Square Base ) LED Red

Part No.:	M11J4007
Customer:	

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	1 from 9









# **Absolute Maximum Ratings**

Ta=25°C

Item	Symbol	AlGalnP	Unit
Power Dissipation	$P_{D}$		mW
DC Forward Current	I <sub>F</sub>	20	mA
Plused Forward Current	I <sub>FP</sub> *		mA
Reverse Voltage	$V_R$		V
Operating Temperature	T <sub>OP</sub>		°C
Storage Temperature	$T_{ST}$	-55 to 100	°C

<sup>\* 0.1</sup> msec pulse, 10% duty cycle

# **Electrical / Optical Characteristics**

I<sub>F</sub>=20mA Ta=25°C

Ermitting Color		Red					
Material		AlGalnP					
Forward Voltage	typ.	2.0	$V_{F}$				
Forward voitage	max.	2.4	$V_{F}$				
Wavelength	λD	624	nm				
	λP		nm				
typ.	Δλ		nm				
Color Temperature	min.		K				
Color remperature	max.		K				
Luminous Intensity *	min.	198	mcd				
Lummous intensity	typ.	482	mcd				
Reverse Current	max.		μA				
Viewing Angle	2Θ1/2	25					

<sup>\*</sup> Per NIST standards

# Round Subminiature Gull Wing Lead ( Square Base ) LED Red

Part No.: **M11J4007** 

Customer:

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	2 from 9

Copyright by EDCON-COMPONENTS










### Curve

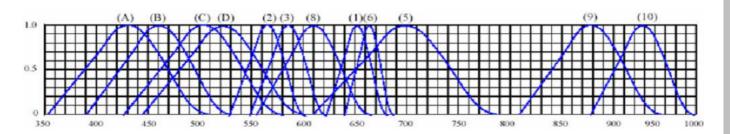

# Wavelength (nm)

# **Relative Intensity vs Wavelength**

(1)	GaAsP / GaAs	(9)	GaAlAs
	655nm Red		880nm
(2)	GaP	(10)	GaAs & GaAlAs
	568nm Yellow Green		940nm
(3)	GaAsP / GaP	(A)	GaN
	585nm Yellow		430nm Blue
(4)	GaAsP / GaP	(B)	InGaN
	635nm Orange & Red		470nm Blue
(5)	GaP	(C)	InGaN
	700nm Red		502nm Green
(6)	GaAlAs / GaAs	(D)	InGaN
	660nm Red		523nm Green
(8)	GaAsP / GaP		

610nm Red

# Round Subminiature Gull Wing Lead ( Square Base ) LED Red

Part No.: M11J4007
Customer:

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	3 from 9












### Curve

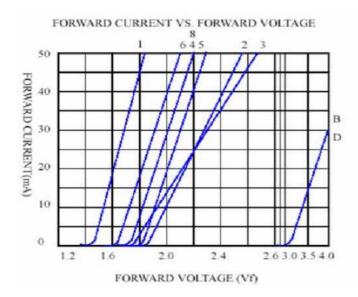



# FORWARD CURRENT VS. AMBIENT TEMPERATURE 50 1 20 40 40 40 AMBIENT TEMPERATURE Ta(°C)



# Round Subminiature Gull Wing Lead ( Square Base ) LED Red

Part No.: **M11J4007** 

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	4 from 9










# **Solder Condition**

### Lead Free Solder

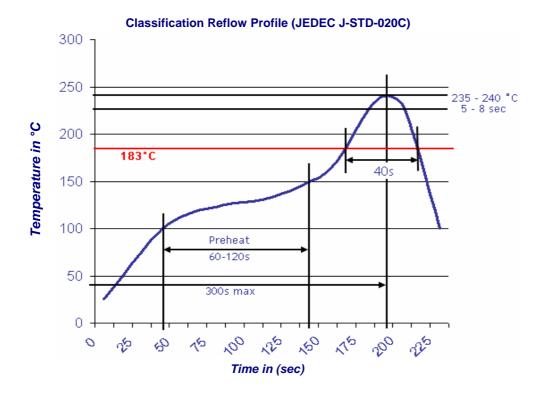

# Round Subminiature Gull Wing Lead ( Square Base ) LED Red

Part No.: **M11J4007** 

APPD:	Ping			FINISH	Hui	Sheet	5 from 9
DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009












# **Packing Specifications**

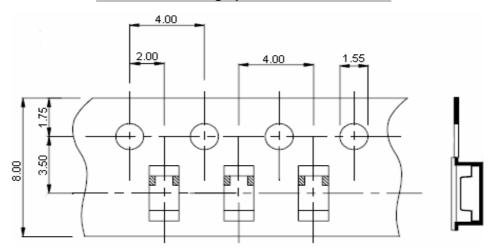

# **Reel Specifications**

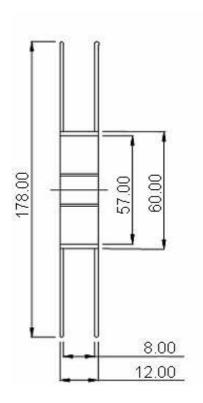

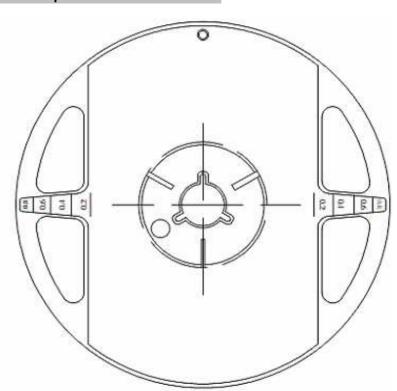

# Round Subminiature Gull Wing Lead ( Square Base ) LED Red

Part No.: **M11J4007** 

Customer:

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	6 from 9

Copyright by EDCON-COMPONENTS










### **Handling Precautions**

Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although ist characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might leads to damage and premature failure of th LED.

1. Handle the component along the side surfaces by using forceps or appropriate tools



2. Do not directly touch or handle the silicone lens surfance. It may damage the internal circuitry.





3. Do not stack together assembled PCBs containing exposed LEDs. Outside impact may scratch the silicone lens or damage the internal circuitry.



# Round Subminiature Gull Wing Lead ( Square Base ) LED Red

Part No.: **M11J4007** 

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	7 from 9










- 4. The outer diameter of the TOP LED pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible.
- 5. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.
- 6. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.



# Round Subminiature Gull Wing Lead ( Square Base ) LED Red

Part No.: **M11J4007** 

APPD:	Ping			FINISH	Hui	Sheet	8 from 9
DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009










### Color table curve

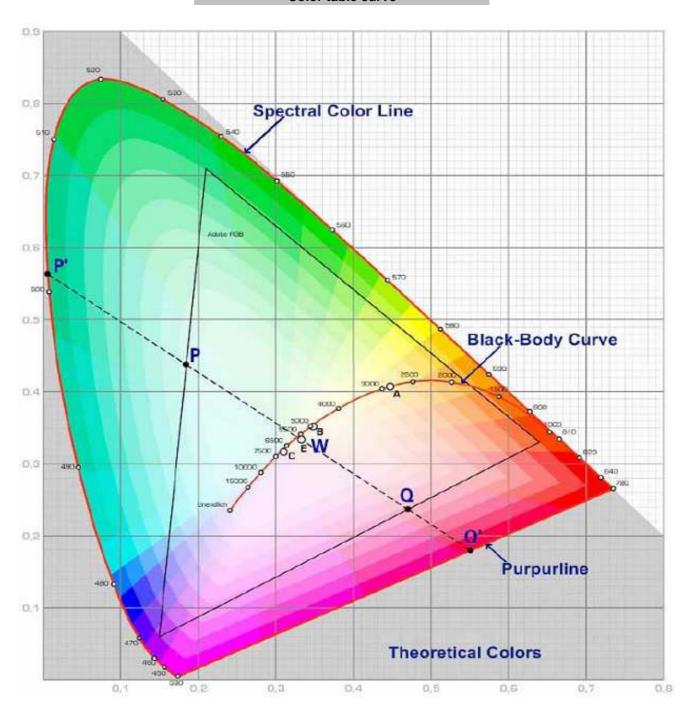

# Round Subminiature Gull Wing Lead ( Square Base ) LED Red

Part No.: **M11J4007** 

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	9 from 9