








### **Applications**

- Interior automotive lighting
   Optical indicators
   Communication Products
   Backlighting
   Toys
  - **Technical Drawing**

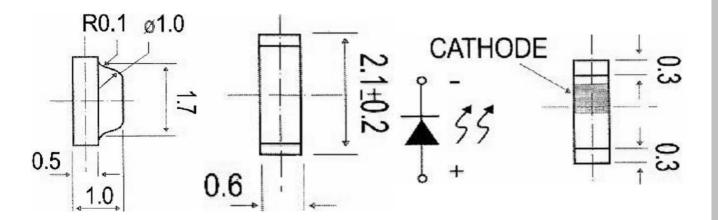

### **Recommended Soldering Pattern**

#### Notes:

All dimensions in mm tolerance is  $\pm 0.1$ mm unless otherwise noted.

## Right Angle Chip LED Blue

Part No.: **M11M7001** 

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	1 from 9









### **Absolute Maximum Ratings**

Ta=25°C

Item	Symbol	InGaN / SiC	Unit
Power Dissipation	$P_{D}$		mW
DC Forward Current	I <sub>F</sub>	20	mA
Plused Forward Current	I <sub>FP</sub> *	I <sub>FP</sub> *	
Reverse Voltage	$V_R$		V
Operating Temperature	T <sub>OP</sub>		°C
Storage Temperature	$T_{ST}$	-55 to 100	°C

<sup>\* 0.1</sup> msec pulse, 10% duty cycle

### **Electrical / Optical Characteristics**

I<sub>F</sub>=5mA Ta=25°C

Ermitting Color		Blue	
Material		InGaN / SiC	
Forward Voltage	typ.	3.5	$V_{F}$
Torward voitage	max.	4.3	$V_{F}$
Wavelength	λD	470	nm
	λP		nm
typ.	Δλ		nm
Color Temperature	min.		K
Color remperature	max.		K
Luminous Intensity *	min.	24	mcd
Luminous intensity	typ.	30	mcd
Reverse Current	max.		μA
Viewing Angle	2Θ1/2	130	

<sup>\*</sup> Per NIST standards

## Right Angle Chip LED Blue

Part No.: **M11M7001** 

Customer:

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	2 from 9

Copyright by EDCON-COMPONENTS

email: info@edcon-components.com










### Curve

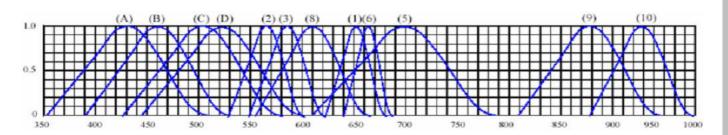

### Wavelength (nm)

### **Relative Intensity vs Wavelength**

(1)	GaAsP / GaAs 655nm Red	(9)	GaAlAs 880nm
(2)	GaP	(10)	GaAs & GaAlAs
	568nm Yellow Green		940nm
(3)	GaAsP / GaP	(A)	GaN
	585nm Yellow		430nm Blue
(4)	GaAsP / GaP	(B)	InGaN
` ,	635nm Orange & Red	` '	470nm Blue
(5)	GaP	(C)	InGaN
` ,	700nm Red	` '	502nm Green
(6)	GaAlAs / GaAs	(D)	InGaN
. ,	660nm Red	` '	523nm Green
(8)	GaAsP / GaP		

610nm Red

## Right Angle Chip LED Blue

Part No.: **M11M7001** 

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	3 from 9












### Curve

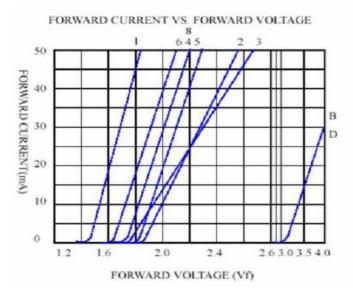

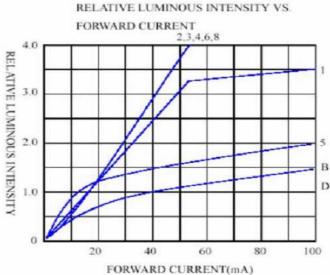

# 

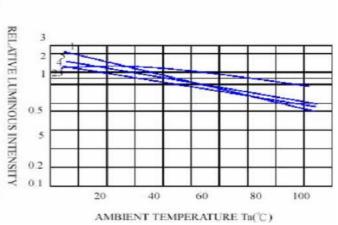

### Right Angle Chip LED Blue

Part No.: **M11M7001** 

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	4 from 9










### **Solder Condition**

### Lead Free Solder

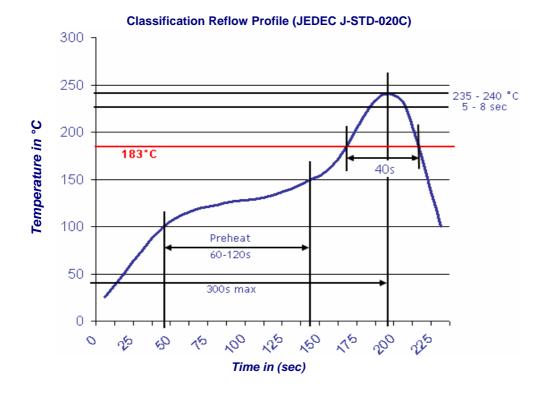

# Right Angle Chip LED Blue

Part No.: **M11M7001** 

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	5 from 9












### **Packing Specifications**

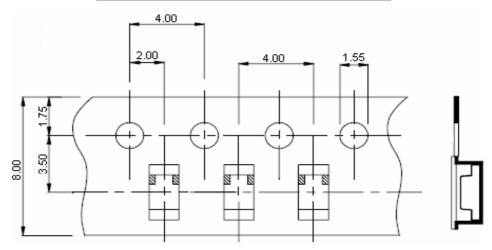

### **Reel Specifications**

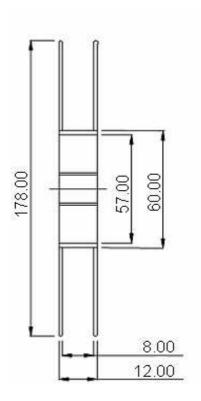

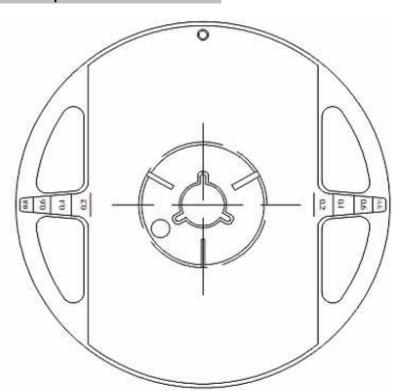

## Right Angle Chip LED Blue

Part No.: **M11M7001** 

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	6 from 9










### **Handling Precautions**

Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although ist characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might leads to damage and premature failure of th LED.

1. Handle the component along the side surfaces by using forceps or appropriate tools



2. Do not directly touch or handle the silicone lens surfance. It may damage the internal circuitry.





3. Do not stack together assembled PCBs containing exposed LEDs. Outside impact may scratch the silicone lens or damage the internal circuitry.



### Right Angle Chip LED Blue

Part No.: **M11M7001** 

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	7 from 9










- 4. The outer diameter of the TOP LED pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible.
- 5. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.
- 6. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.

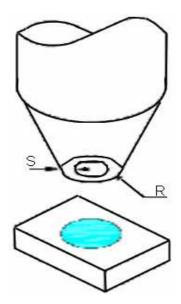

### Right Angle Chip LED Blue

Part No.: **M11M7001** 

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	8 from 9










### Color table curve

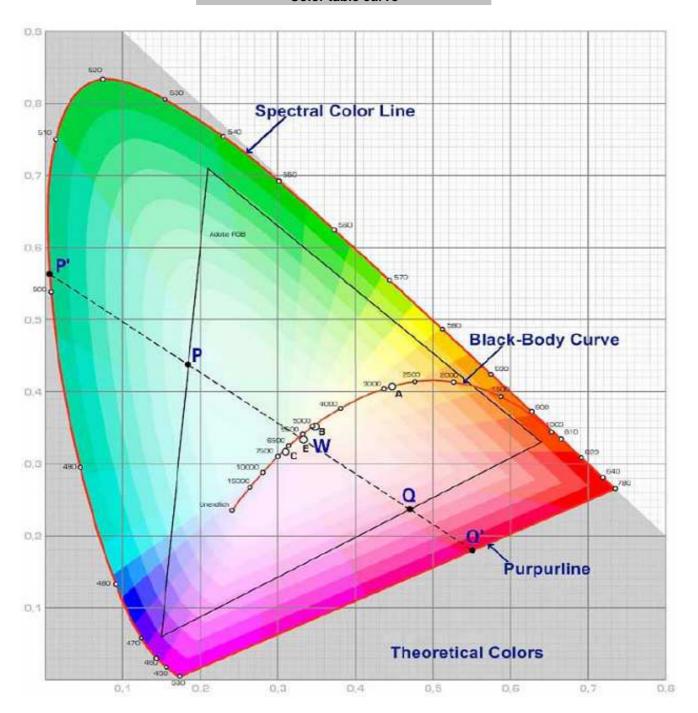

## Right Angle Chip LED Blue

Part No.: **M11M7001** 

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	06.12.2009
APPD:	Ping			FINISH	Hui	Sheet	9 from 9