




Applications

Interior automotive lighting

 Optical indicators
 Communication Products
 Backlighting
 Toys

Technical Drawing

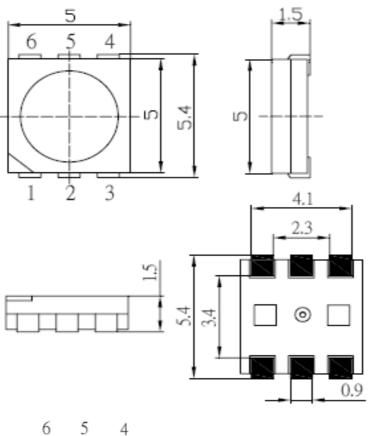

4, 5, 6 Cathode 4, 5, 6 Cathode 1, 2, 3 Anode

	Notes : All dimensions in mm tolerance is ± 0.1mm unless otherwise noted.					PLCC6 Blue		
						.: M11	A5022	
					Custome	er:		
DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	19.11.2010	
APPD:	Ping			FINISH	Hui	Sheet	1 from 9	

www.edcon-components.com

Copyright by EDCON-COMPONENTS





Absolute Maximum Ratings

Item	Symbol		Unit
Power Dissipation	PD	270	mW
DC Forward Current	I _F	75	mA
Plused Forward Current	I _{FP} *	100	mA
Reverse Voltage	V _R	5	V
Operating Temperature	T _{OP}	-30 to 85	°C
Storage Temperature	T _{ST}	-40 to 100	°C

* 0.1 msec pulse, 10% duty cycle

Electrcal / Optical Characteristics

Ermitting Color	Blue				
Material					
Forward Voltage	typ.	2.1	V _F		
r orward voltage	max.	2.6	V _F		
Wavelength	λD	465 ~ 475	nm		
-	λP		nm		
typ.	Δλ		nm		
Color Temperature	min.		K		
Color remperature	max.		K		
Luminous Intensity *	min.	1120	mcd		
Lummous intensity	typ.	1560	mcd		
Reverse Current	max.		μA		
Viewing Angle	201/2	120			


* Per NIST standards

					PLCC6 Blue		
					Part No.: M11A5022		A5022
					Custome	er:	
DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	19.11.2010
APPD:	Ping			FINISH	Hui	Sheet	2 from 9
Copyright by EDCON-COMPONENTS							





Directive Characteristics

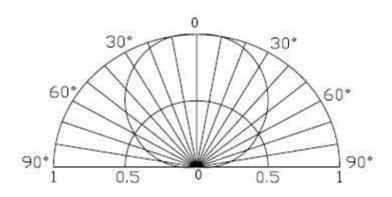

	PLCC6 Blue				
	Part No.	.: M11	A5022		
	Custome	er:			
MATL:	Chui	DATE	19.11.2010		
FINISH	Hui	Sheet	3 from 9		

www.edcon-components.com

Dong

Ping

CHKD

DRW:

APPD:


Copyright by EDCON-COMPONENTS


Chang







Typical Characteristics

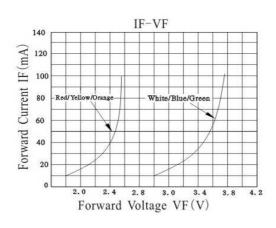

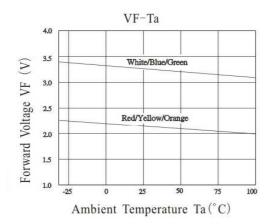

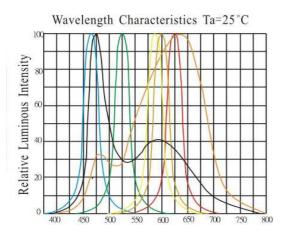


CHKD

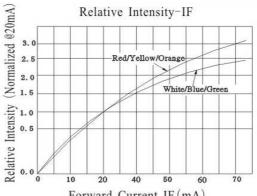


Forward Current IF (mA)

Relative Intensity-Ta

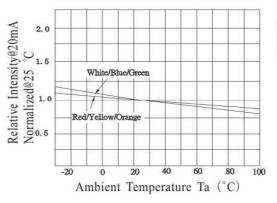





PLCC6 Blue					
Part No.	: M11	A5022			
Custome	P r :				
Chui	DATE	19.11.2010			
Hui	Sheet	4 from 9			

www.edcon-components.com

Dong

Ping

DRW:

APPD:

Copyright by EDCON-COMPONENTS

Chang

MATL:


FINISH





Solder Condition

Lead Free Solder

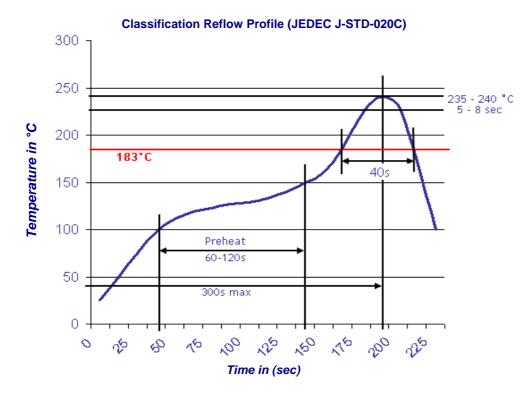

		PLCC6 Blue			
		Part No.: M11A5022			
		Customer:			
Chang	MATL:	Chui	DATE	19.11.2010	
	FINISH	Hui	Sheet	5 from 9	
		FINISH	Custome Chang MATL: Chui FINISH Hui	Blue Part No.: M11/ Customer: Customer: Chang MATL: Chui FINISH Hui Sheet	

Dong

Ping

DRW:


APPD:

Copyright by EDCON-COMPONENTS





Packing Specifications

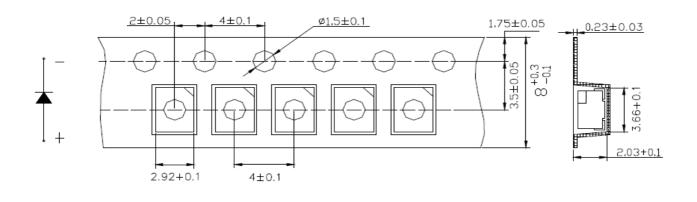

Reel Specifications

Ø20,2MIN Ø13-0.20

					PLCC6 Blue		
					Part No.: M11A5022		A5022
					Custome	er:	
DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	19.11.2010
APPD:	Ping			FINISH	Hui	Sheet	6 from 9

www.edcon-components.com

Copyright by EDCON-COMPONENTS

email: info@edcon-components.com

178±2.0

62±1.0

8,4 +1.5

14,4MAX






Handling Precautions

Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although ist characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might leads to damage and premature failure of th LED.

1. Handle the component along the side surfaces by using forceps or appropriate tools



2. Do not directly touch or handle the silicone lens surfance. It may damage the internal circuitry.



3. Do not stack together assembled PCBs containing exposed LEDs. Outside impact may scratch the silicone lens or damage the internal circuitry.




					PLCC6 Blue		
					Part No.: M11A5022		5022
					Custome	er:	
DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	19.11.2010
APPD:	Ping			FINISH	Hui	Sheet	7 from 9

Copyright by EDCON-COMPONENTS





- 4. The outer diameter of the TOP LED pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible.
- 5. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.
- 6. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.

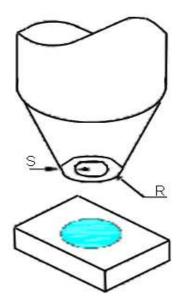

	PLCC6 Blue				
	Part No.	.: M11	A5022		
	Custome	er:			
MATL:	Chui	DATE	19.11.2010		
FINISH	Hui	Sheet	8 from 9		

Dong

Ping


CHKD

DRW:

APPD:

Copyright by EDCON-COMPONENTS

Chang

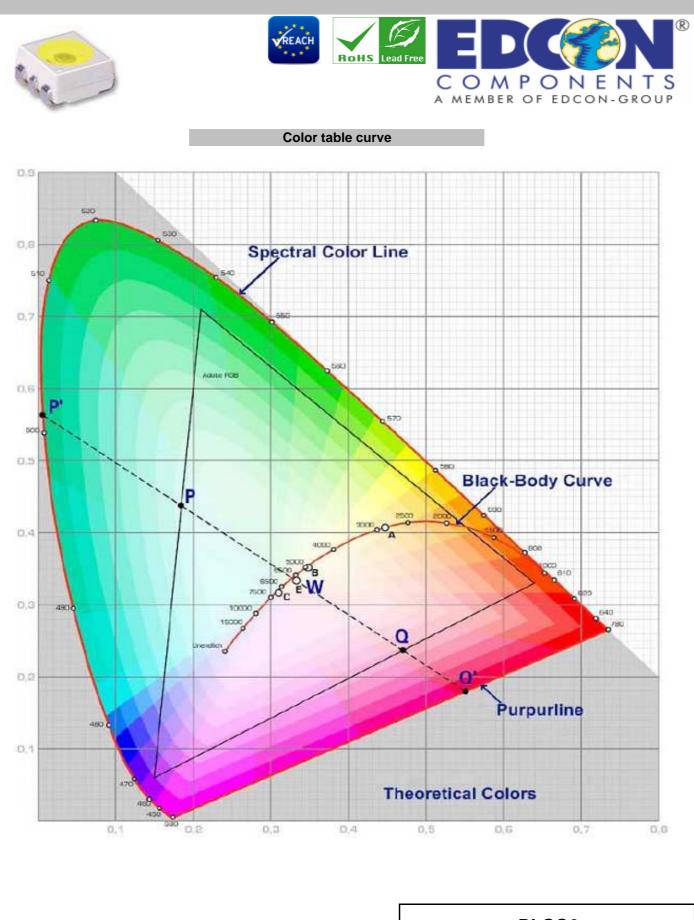

					PLCC6 Blue		
					Part No.: M11A5022		
					Custome	r:	
DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	19.11.2010
APPD:	Ping			FINISH	Hui	Sheet	9 from 9
Copyright by EDCON-COMPONENTS							