




#### Applications

Interior automotive lighting

 Optical indicators
 Communication Products
 Backlighting
 Toys

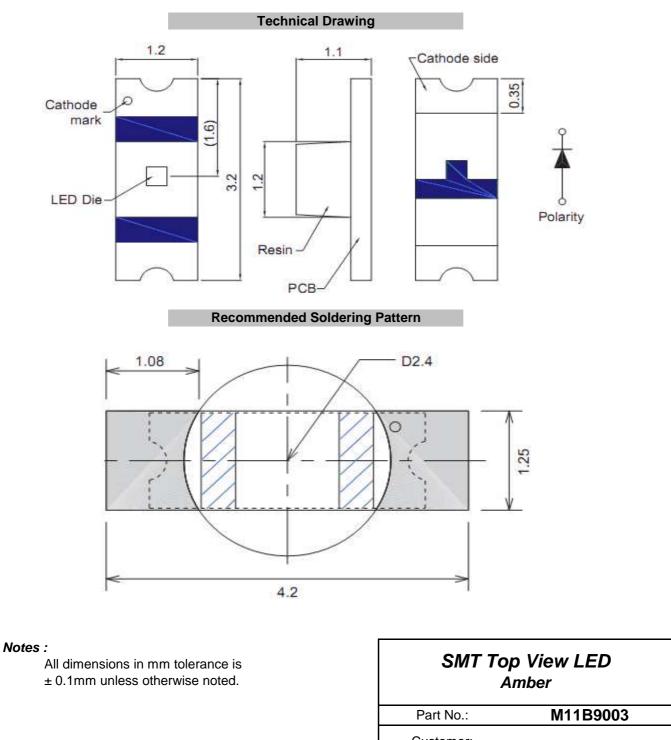

					Custome	er:			
DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	03.12.2009		
APPD:	Ping			FINISH	Dia	Sheet	1 from 9		
Copyright by EDCON-COMPONENTS									

www.edcon-components.com





# **Absolute Maximum Ratings**

Ta=25°C

Item	Symbol	GaAsP	Unit
Power Dissipation	PD	65	mW
DC Forward Current	I <sub>F</sub>	25	mA
Plused Forward Current	I <sub>FP</sub> *	100	mA
Reverse Voltage	V <sub>R</sub>	5	V
Operating Temperature	T <sub>OP</sub>	-30 to 80	°C
Storage Temperature	T <sub>ST</sub>	-40 to 85	°C

\* 0.1 msec pulse, 10% duty cycle

Electrcal / Optical Characteristics

I<sub>F</sub>=20mA Ta=25°C

Ermitting Color		Amber GaAsP					
Material							
Forward Voltage	typ.	2.1	V <sub>F</sub>				
Forward Voltage	max.	2.6	V <sub>F</sub>				
Wavelength	λD	608	nm				
	λP	610	nm				
typ.	Δλ	35	nm				
Color Temperature	min.		K				
	max.		K				
Luminous Intensity *	min.	3.6	mcd				
Lummous intensity	typ.	9	mcd				
Reverse Current	max.		μA				
Viewing Angle	201/2	140					


\* Per NIST standards


				SA	<b>IT Top View L</b> Amber	ED				
					Part No.	: M11I	B9003			
					Custome	er:				
DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	03.12.2009			
APPD:	Ping			FINISH	Dia	Sheet	2 from 9			
	Copyright by EDCON-COMPONENTS									





### **Directive Characteristics**

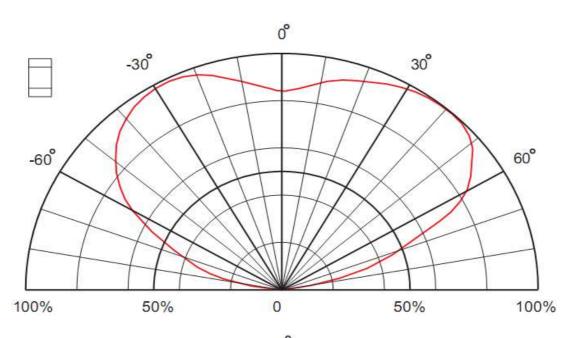

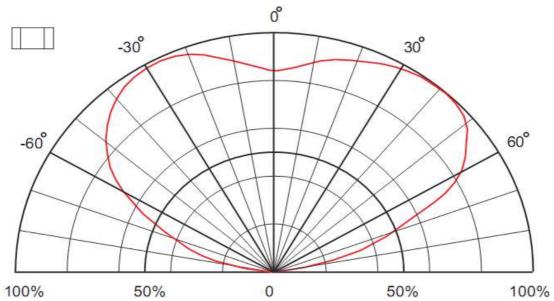


			SN	IT Top View Amber	LED					
					Part No.	: <b>M1</b>	1B9003			
					Custome	r:				
DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	03.12.2009			
APPD:	Ping			FINISH	Dia	Sheet	3 from 9			
	Copyright by EDCON-COMPONENTS									


www.edcon-components.com





Curvs





Forward Current vs. Forward Voltage

NG

2.8

Forward Voltage (V)

3.2

3.6 4.0

30

24

18

12


6

0


2.0

24


Forward Current (mA)



Forward Current vs. Ambient Temperature



Relative Intensity vs. Forward Current 150 Relative Intensity (%) 120 90 60 NG/NB 30 0 is, 6 12 18 24 30 Forward Current(mA)



					SMT Top View LED Amber		
					Part No.	: M11E	39003
					Custome	er:	
DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	03.12.2009
APPD:	Ping			FINISH	Dia	Sheet	4 from 9

### www.edcon-components.com


Copyright by EDCON-COMPONENTS





### **Solder Condition**

### Lead Free Solder

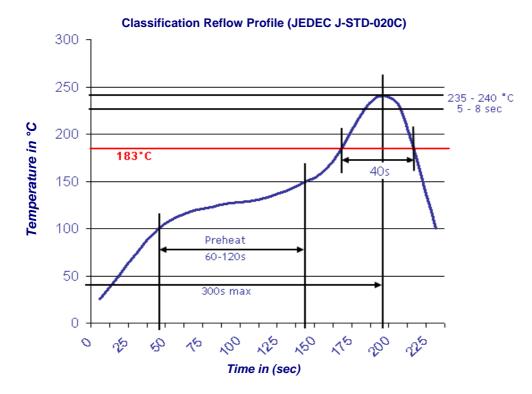

		SMT Top View LED Amber			
		Part No.: <b>M11B9003</b>			
		Custome	er:		
Wung	MATL:	Chui	DATE	03.12.2009	
	FINISH	Dia	5 from 9		

Wang

Ping

CHKD


DRW:

APPD:


Copyright by EDCON-COMPONENTS






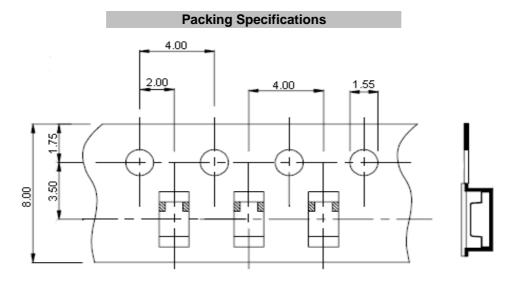

**Reel Specifications** 

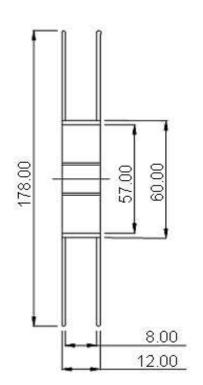

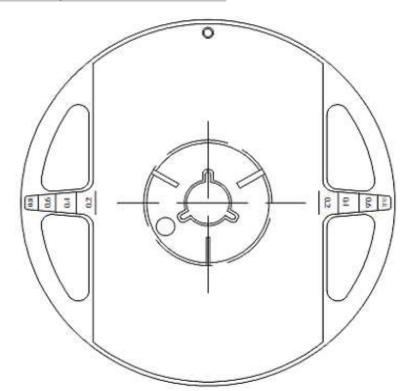

					SMT Top View LED Amber		
					Part No.: <b>M11B9003</b>		39003
					Customer:		
DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	03.12.2009
APPD:	Ping			FINISH	Dia	Sheet	6 from 9

www.edcon-components.com

Copyright by EDCON-COMPONENTS







### Handling Precautions

Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although ist characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might leads to damage and premature failure of th LED.

1. Handle the component along the side surfaces by using forceps or appropriate tools



2. Do not directly touch or handle the silicone lens surfance. It may damage the internal circuitry.

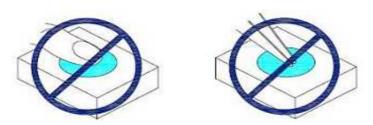

3. Do not stack together assembled PCBs containing exposed LEDs. Outside impact may scratch the silicone lens or damage the internal circuitry.




					SMT Top View LED Amber		
					Part No.	: M11E	39003
					Custome	er:	
DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	03.12.2009
APPD:	Ping			FINISH	Dia	Sheet	7 from 9

Copyright by EDCON-COMPONENTS





- 4. The outer diameter of the TOP LED pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible.
- 5. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.
- 6. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.

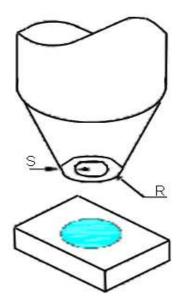

		SN	MT Top View Amber	LED	
		Part No.: <b>M11B9003</b>			
		Custome	er:		
Wung	MATL:	Chui DATE 03.12.2			
	FINISH	Dia	Sheet	8 from 9	

Wang


Ping

CHKD

DRW:

APPD:

Copyright by EDCON-COMPONENTS

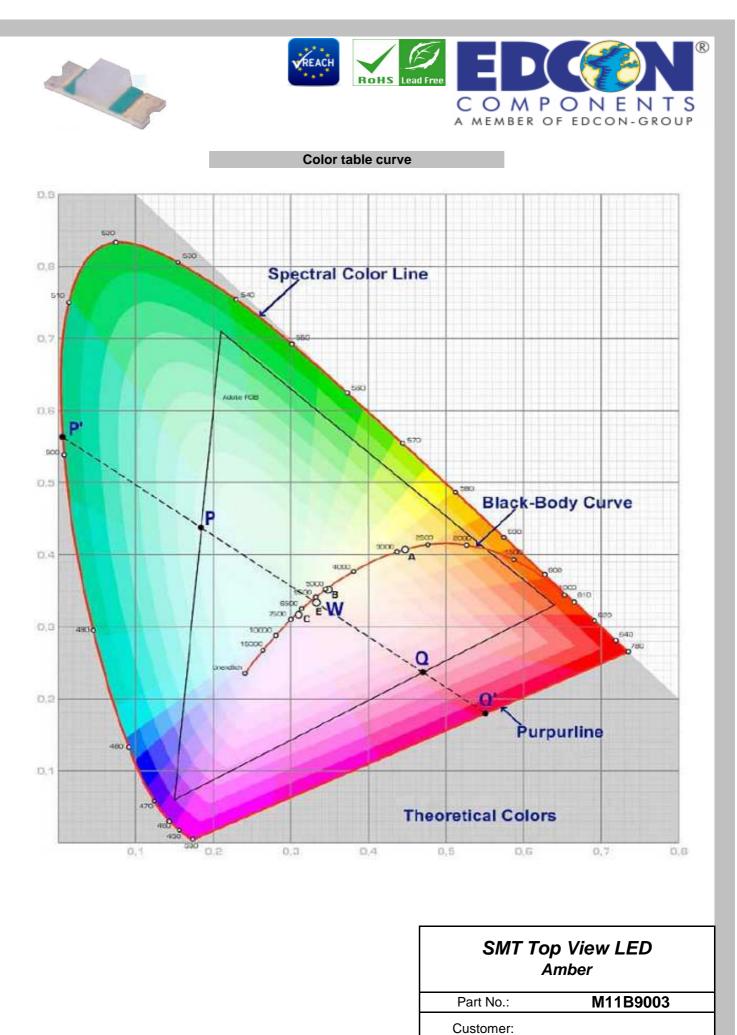

DRW:	Wang	CHKD	Wung	MATL:	Chui	DATE	03.12.2009
APPD:	Ping			FINISH	Dia	Sheet	9 from 9
			DNENTS				

www.edcon-components.com

email: info@edcon-components.com