

Data Sheet

Screwless Terminal Block

Pitch: 7,00 mm

Serie: A11P004

Customer Information for special Item

EDCON Customer : 0

Customer Version No. : 0

EDCON-COMPONENTS



Technical Description

Drawing (Dimension in mm)

Electrical

Standard
 Rated voltage
 Rated current
 Wire range
 Withstanding voltage

UL	IEC
300V	400V
7A	5A
22-18 AWG	0.2-0.75mm ²
AC2000V/1Min	

Mechanical

Wire strip length
 Operating temperature

8.5 ~ 9.5mm
 -40°C ~ +105°C

Dimensions



Pitch
 Poles

7.00mm
 1P - xxP

Material

Housing
 Pin header
 Wire guard

PA66 (UL94V-0)
 Phosphor Bronze, Tin plated
 Stainless steel

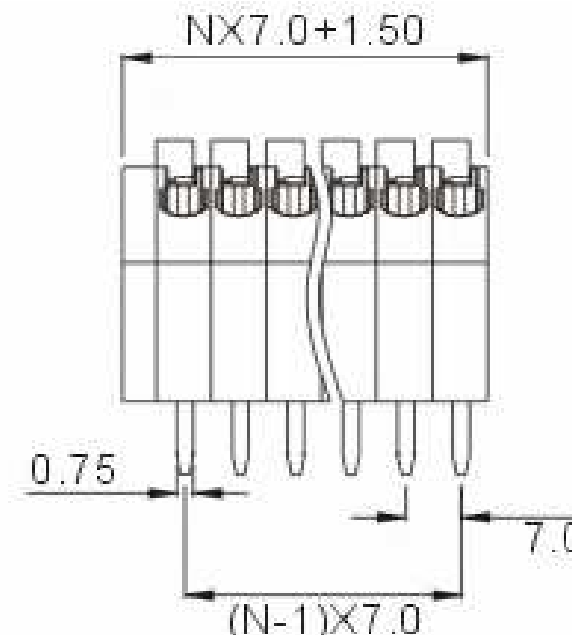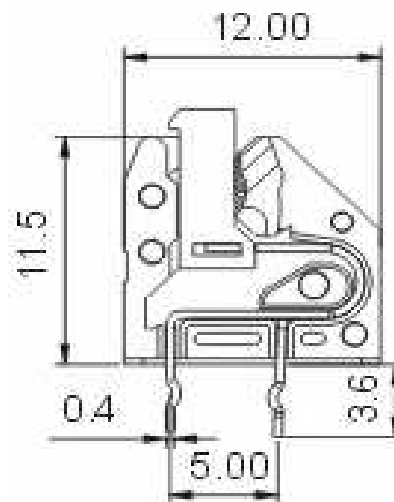

Screwless Terminal Block

Part No.: **A11P004**

Customer:


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	04.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

EDCON-COMPONENTS



PCB Layout (Dimension in mm)

Dimensions (mm)

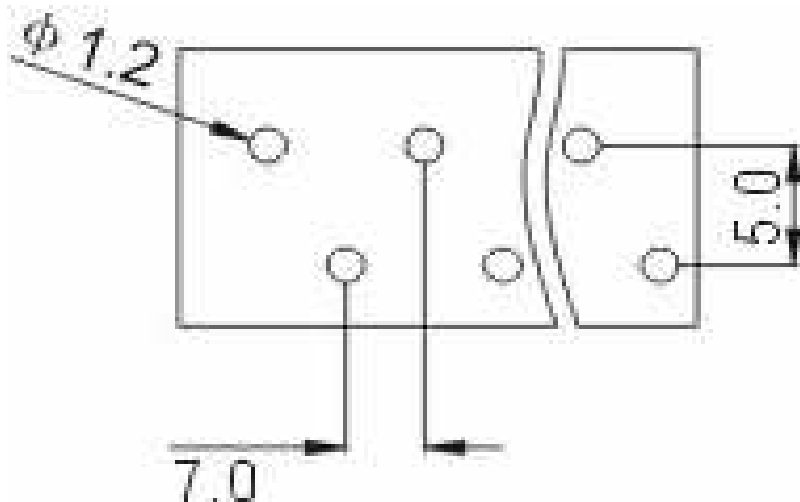

No. of Pos.	A	Tol. P	B	Tol. P
02	15,50	± 0,35	7,00	± 0,35
03	22,50	± 0,35	14,00	± 0,35
04	29,50	± 0,35	21,00	± 0,35
05	36,50	± 0,35	28,00	± 0,35
06	43,50	± 0,35	35,00	± 0,35
07	50,50	± 0,35	42,00	± 0,35
08	57,50	± 0,35	49,00	± 0,35
09	64,50	± 0,35	56,00	± 0,35
10	71,50	± 0,35	63,00	± 0,35
11	78,50	± 0,35	70,00	± 0,35
12	85,50	± 0,35	77,00	± 0,35
13	92,50	± 0,35	84,00	± 0,35
14	99,50	± 0,35	91,00	± 0,35
15	106,50	± 0,35	98,00	± 0,35
16	113,50	± 0,35	105,00	± 0,35
17	120,50	± 0,35	112,00	± 0,35
18	127,50	± 0,35	119,00	± 0,35
19	134,50	± 0,35	126,00	± 0,35
20	141,50	± 0,35	133,00	± 0,35
21	148,50	± 0,35	140,00	± 0,35
22	155,50	± 0,35	147,00	± 0,35
23	162,50	± 0,35	154,00	± 0,35
24	169,50	± 0,35	161,00	± 0,35

Screwless Terminal Block

Part No.: **A11P004**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	04.02.2014	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 4		

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	Body Color	Approval	Approval Code	ROHS	Packing	EDCON Cust. No.	Customer Version		
A11P004	02	GY	N	N	R	B				

Pitch:
7,00

02= Number of Pos. Standard 2~24 Pos.	GY= Gray (Standard)	N= No Approval	N= NON Approval	R= ROHS Conform	B= Standard Package	xxxxxx= Customer Number	xxx= Customer Version ??(Printing)
	GN= Green	1= Approval for Material	A= UL /UR Approval Please consult EDCON for available	N= NON ROHS Conform	I= Individual Package		
		2= Approval for Terminal Block					
	OR= Orange		B= VDE Approval Please consult EDCON for available				
	BK= Black		C= TÜV Approval Please consult EDCON for available				


Screwless Terminal Block	
Part No.:	A11P004
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	04.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

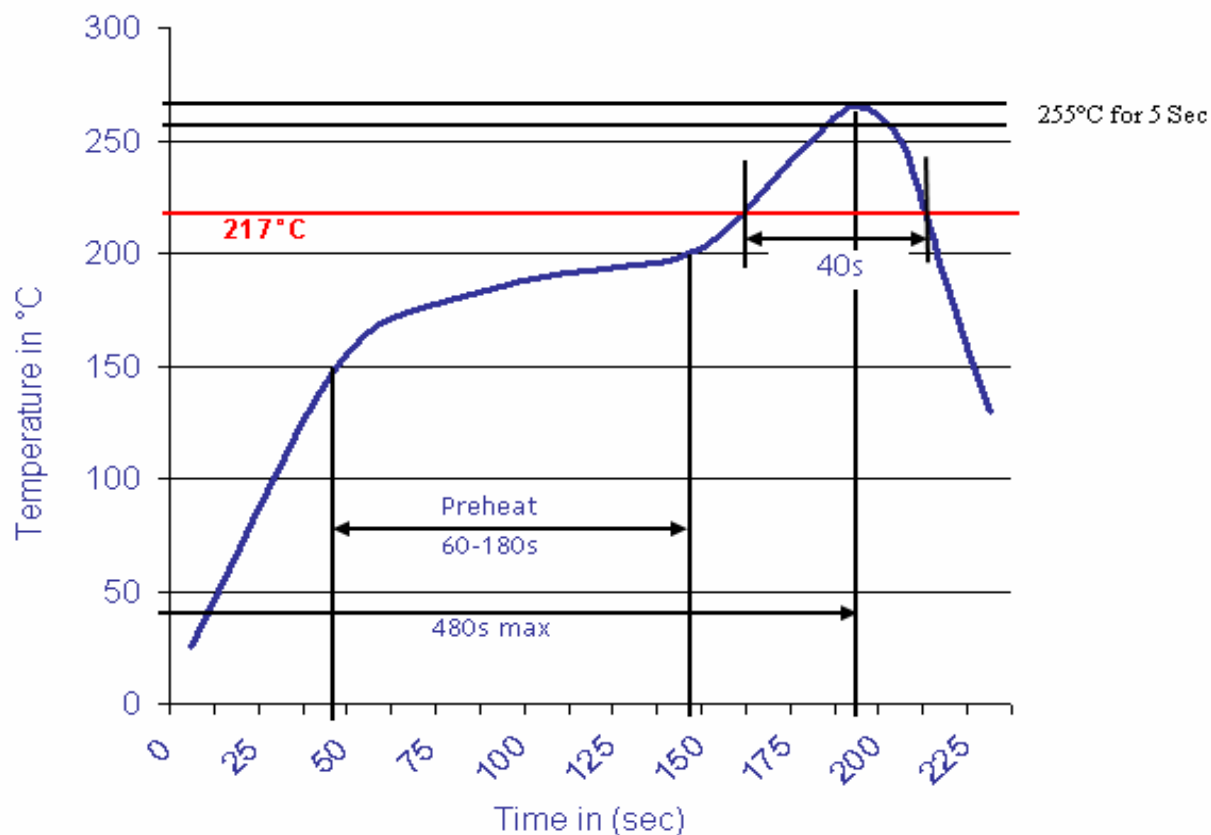

Screwless Terminal Block

Part No.: **A11P004**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	04.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	

