

Data Sheet

Screwless Terminal Block

Pitch: 7,50 mm

Serie: A11Q028

Customer Information for special Item

EDCON Customer : 0

Customer Version No. : 0

EDCON-COMPONENTS



Technical Discription

Drawing (Dimension in mm)

Electrical

Standard
 Rated voltage
 Rated current
 Wire range
 Withstanding voltage

UL	IEC
300V	450V, 750V, 1000V
15A	17A
28-12 AWG	0.2-2.5mm ²
AC2000V/1Min	

Mechanical

Wire strip length
 Operating temperature

5 ~ 6mm
 -40°C ~ +105°C

Dimensions



Pitch
 Poles

7.50mm
 1P - xxP

Material

Housing
 Pin header
 Wire guard

PA66 (UL94V-0)
 Phosphor Bronze, Tin plated
 Stainless steel

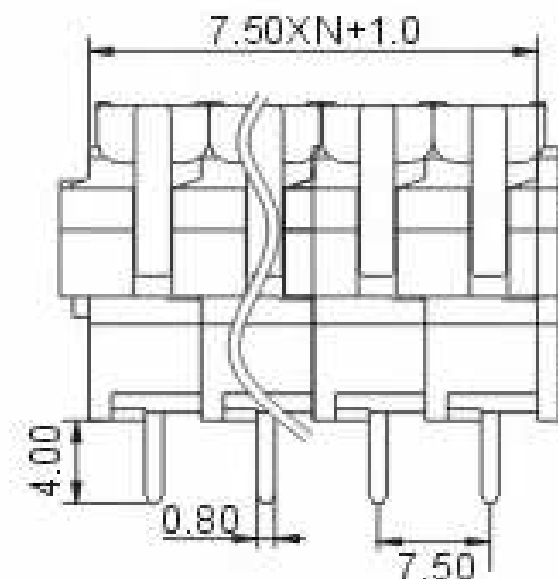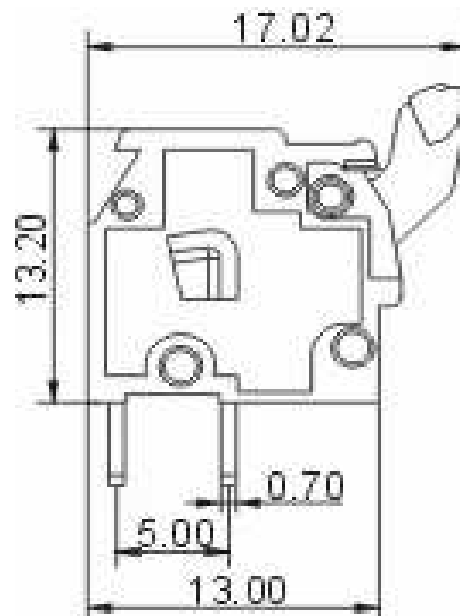

Screwless Terminal Block

Part No.: **A11Q028**

Customer:


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	06.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

EDCON-COMPONENTS



PCB Layout (Dimension in mm)

Dimensions (mm)

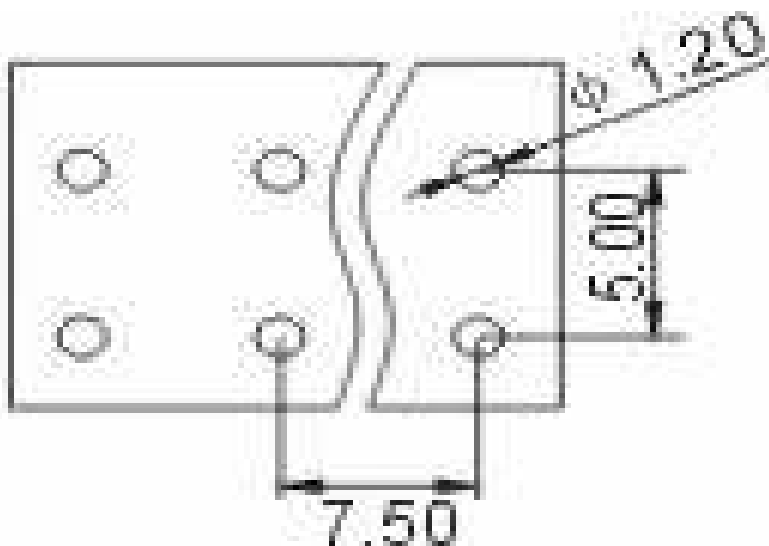

No. of Pos.	A	Tol. P	B	Tol. P
02	16,00	± 0,35	7,50	± 0,35
03	23,50	± 0,35	15,00	± 0,35
04	31,00	± 0,35	22,50	± 0,35
05	38,50	± 0,35	30,00	± 0,35
06	46,00	± 0,35	37,50	± 0,35
07	53,50	± 0,35	45,00	± 0,35
08	61,00	± 0,35	52,50	± 0,35
09	68,50	± 0,35	60,00	± 0,35
10	76,00	± 0,35	67,50	± 0,35
11	83,50	± 0,35	75,00	± 0,35
12	91,00	± 0,35	82,50	± 0,35
13	98,50	± 0,35	90,00	± 0,35
14	106,00	± 0,35	97,50	± 0,35
15	113,50	± 0,35	105,00	± 0,35
16	121,00	± 0,35	112,50	± 0,35
17	128,50	± 0,35	120,00	± 0,35
18	136,00	± 0,35	127,50	± 0,35
19	143,50	± 0,35	135,00	± 0,35
20	151,00	± 0,35	142,50	± 0,35
21	158,50	± 0,35	150,00	± 0,35
22	166,00	± 0,35	157,50	± 0,35
23	173,50	± 0,35	165,00	± 0,35
24	181,00	± 0,35	172,50	± 0,35

Screwless Terminal Block

Part No.: **A11Q028**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	06.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 4	

Customer:

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	Body Color	Approval	Approval Code	ROHS	Packing	EDCON Cust. No.	Customer Version		
A11Q028	02	GY	N	N	R	B				

Pitch:
7,50

02= Number of Pos. Standard 2~24 Pos.	GY= Gray (Standard) GN= Green OR= Orange BK= Black	N= No Approval 1= Approval for Material 2= Approval for Terminal Block	N= NON Approval A= UL /UR Approval Please consult EDCON for available B= VDE Approval Please consult EDCON for available C= TÜV Approval Please consult EDCON for available	R= ROHS Conform N= NON ROHS Conform	B= Standard Package I= Individual Package	xxxxxx= Customer Number	xxx= Customer Version ??(Printing)
---	---	---	--	--	--	--------------------------------	---

Screwless Terminal Block

Part No.: **A11Q028**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	06.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

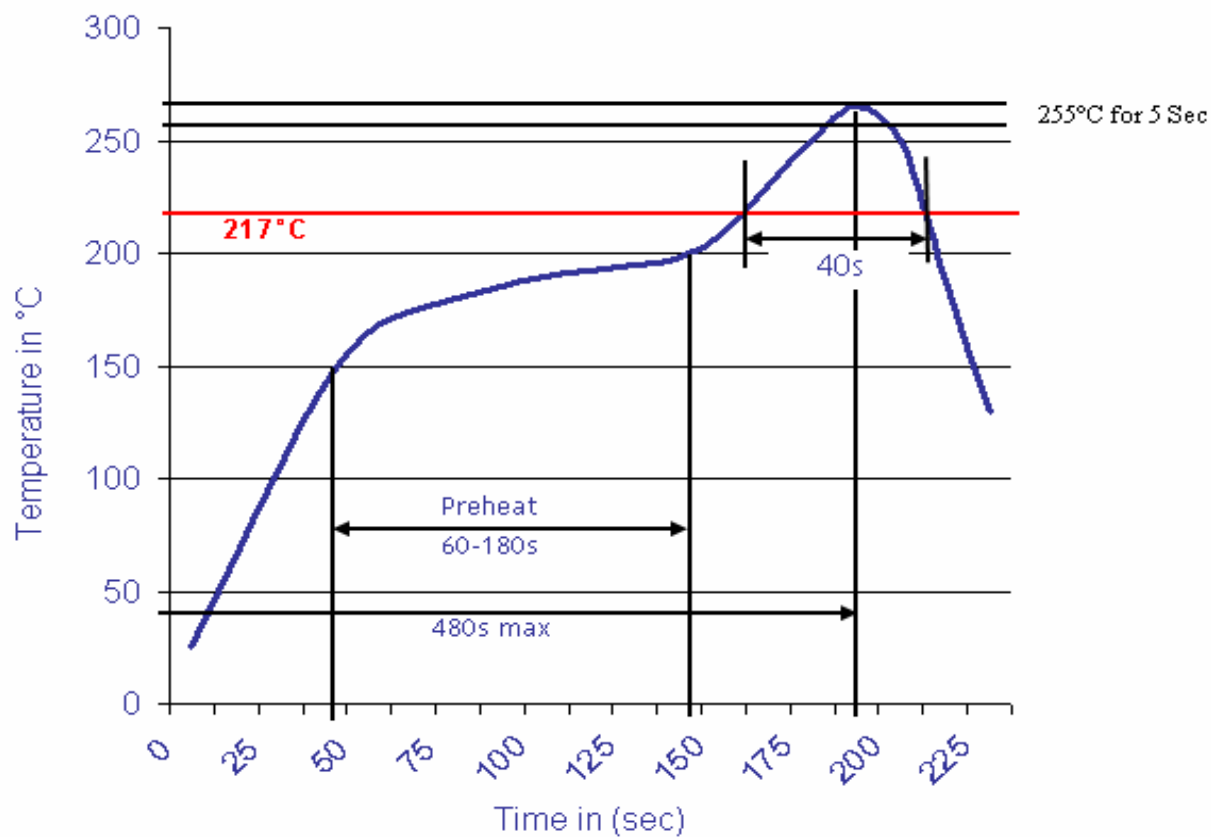

Screwless Terminal Block

Part No.: **A11Q028**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	06.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	

