

Data Sheet

Screwless Terminal Block Pitch 7,50mm / TOP-ENTRY

Pitch: 7,50 mm


Serie: A11Q088

Customer Information for special Item

EDCON Customer : xxxxxx

Customer Version No. : xx

EDCON-COMPONENTS



Technical Discription


Electrical:	UL	IEC	VDE
Rated voltage:(V)	600	800	
Rated current: (A)	41	41	
Withstanding Voltage: (V) AC/1min:	2200	3000	
Impuls Withstanding Voltage (V)	8000		
Operating Temperature:	-40°C ~ +105°C		

Material:


Housing Terminal Body:	Thermoplastic (PA66)
Housing Left-side:	Thermoplastic (PA66)
Housing Right side:	Thermoplastic (PA66)
Lever:	PA66 UL94V-0 Orange
Imflamability:	UL94V-0
Terminal Material:	Copper Matte
Terminal Surface:	Tin plated over Nickel
Spring Clamp:	Stainless steel
Thermoplastic E-File No.	E507491
Polyamide (PA66) pellets	E331274

Mechanical:

Strip length: mm	12
Wire Range Solid/ Stranded (AWG)	20~8
Wire Range Solid/ Stolid (mm²)	0,75 ~ 10
Wire Range Solid/ Stranded (mm²)	0,75 ~ 6
Screw Torque (max.)	
Poles (P)	01~xx
Pin Dimension (mm)	4,0
PCB Hole Diameter (mm)	2,3
Mounting Type	Wave Soldering

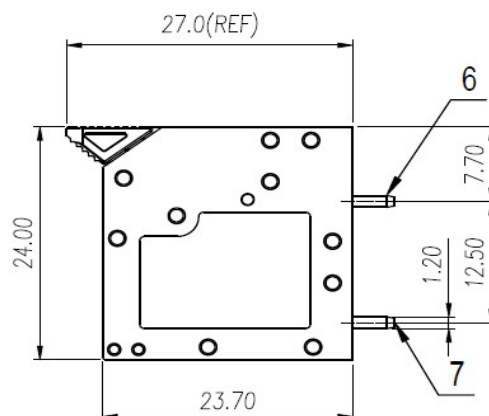

Drawing (Dimension in mm)

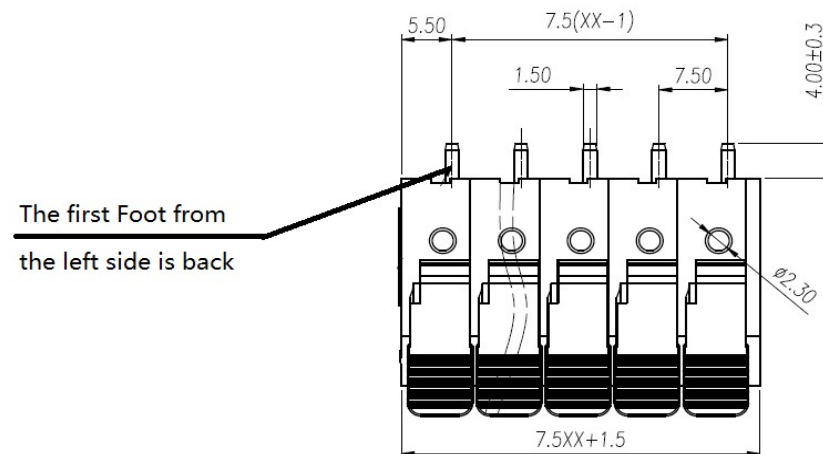


Tolerances unless otherwise specified (mm)				
X	X.X	X.XX	X.XXX	Angle
±	±	±	±	±3°
DRW:	Jason	CHKD	Wilson	MATL:
APPD:	Schumi			FINISH
				Jamy
				Sheet No.
				1 from 4

**Screwless Terminal Block Pitch
7,50mm / TOP-ENTRY**

Part No.: **A11Q088**



Customer:

EDCON-COMPONENTS



PCB Layout Dimension (mm)
TOP-VIEW to PCB

Dimensions (mm)

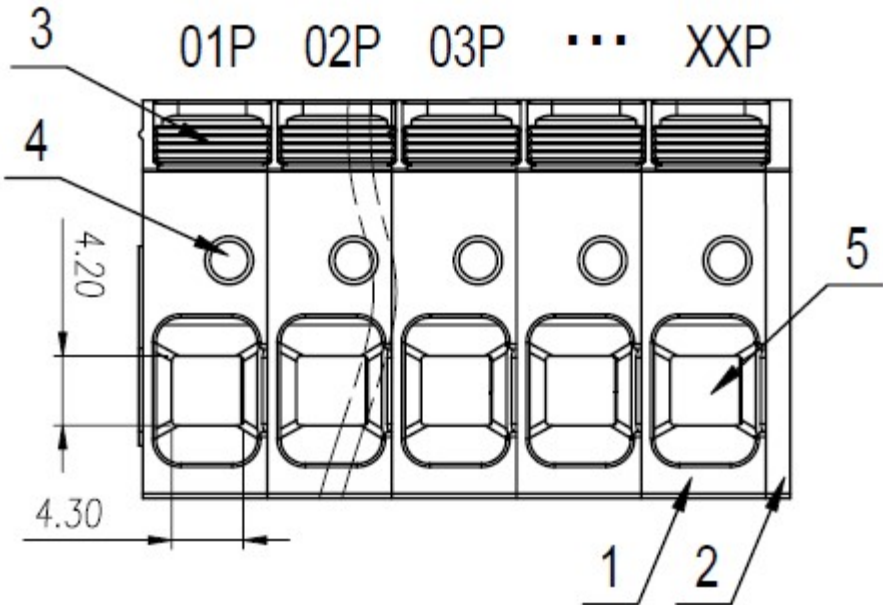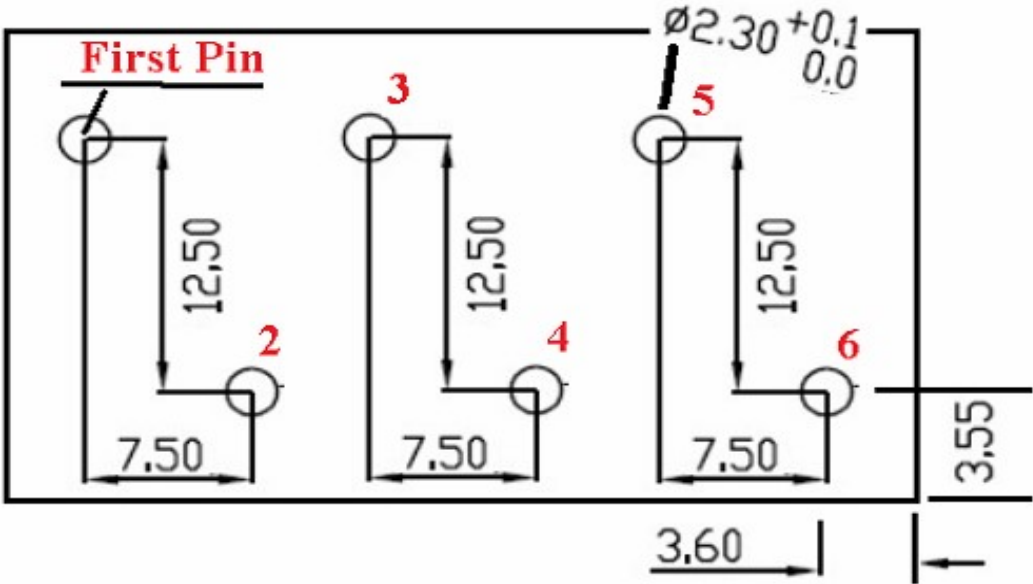

Screwless Terminal Block Pitch
7,50mm / TOP-ENTRY

Part No.: A11Q088

Customer:

DRW:	Jason	CHKD:	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	05.12.2025
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 4

www.edcon-components.com

email: info@edcon-components.com



EDCON[®]
COMPONENTS
A MEMBER OF EDCON-GROUP

Serie	No. of Pos.	Body Color	Srew Type	Approval Code	ROHS	Packing	EDCON Cust. No.	Customer Version		
A11Q088	-	01	PG	C	N	R	B	xxxxxx	xx	


Pitch	01= Number of Pos.		C= Screwless Type	X= NEN Approval	R= ROHS Conform	B= Standard Package Box/ Polybag	XXXXXX= Customer Number	XX= Customer Version (Printing) ??
7,50	Standard 1 ~ xxPos.				N= UL-Approval for Body Material	N= NON ROHS Conform	I= Individual Package	
				A= UL /UR Approval Please consult EDCON for available				
				B= VDE Approval Please consult EDCON for available				
				C= TÜV Approval Please consult EDCON for available				
	PG= Phoenix Green							

**Screwless Terminal Block Pitch
7,50mm / TOP-ENTRY**

Part No.: **A11Q088**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	05.12.2025
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

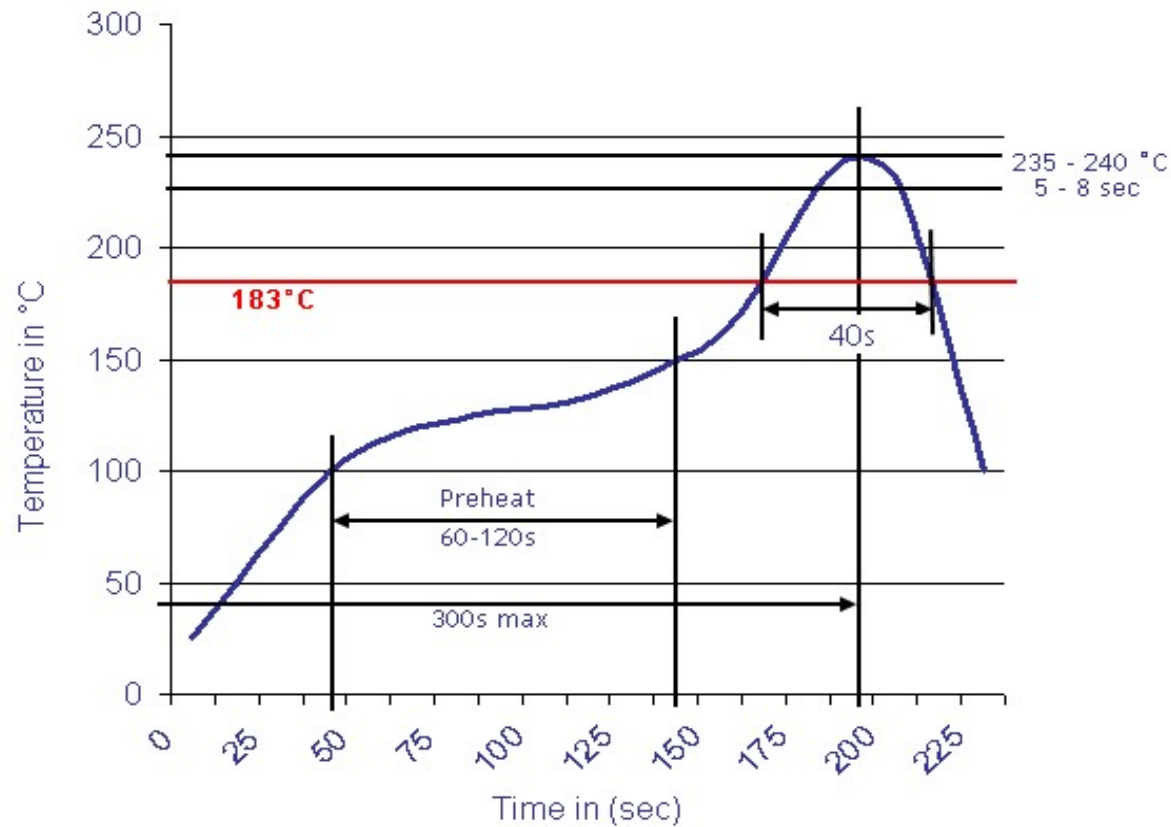

**Screwless Terminal Block Pitch
7,50mm / TOP-ENTRY**

Part No.: **A11Q088**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	05.12.2025
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	