

Data Sheet

Screwless Terminal Block

Pitch: 7,62 mm


Serie: A11R019

Customer Information for special Item

EDCON Customer : 0

Customer Version No. : 0

EDCON-COMPONENTS



Technical Discription

Drawing (Dimension in mm)

Electrical

Standard cULus
 Rated voltage 300V
 Rated current 8A
 Withstanding voltage 1.5KV
 Solid / Stranded wire 28-12 AWG

Mechanical


Wire strip length 6 ~ 7mm
 Ambient temperature -40°C ~ +115°C
 Soldering temperature 250°C ±10°C/5 sec

Dimensions

Pitch 7.62mm
 Poles

Material

Housing Thermoplastic (UL94V-0)
 Pin header Brass, Tin plated
 Wire guard Stainless steel

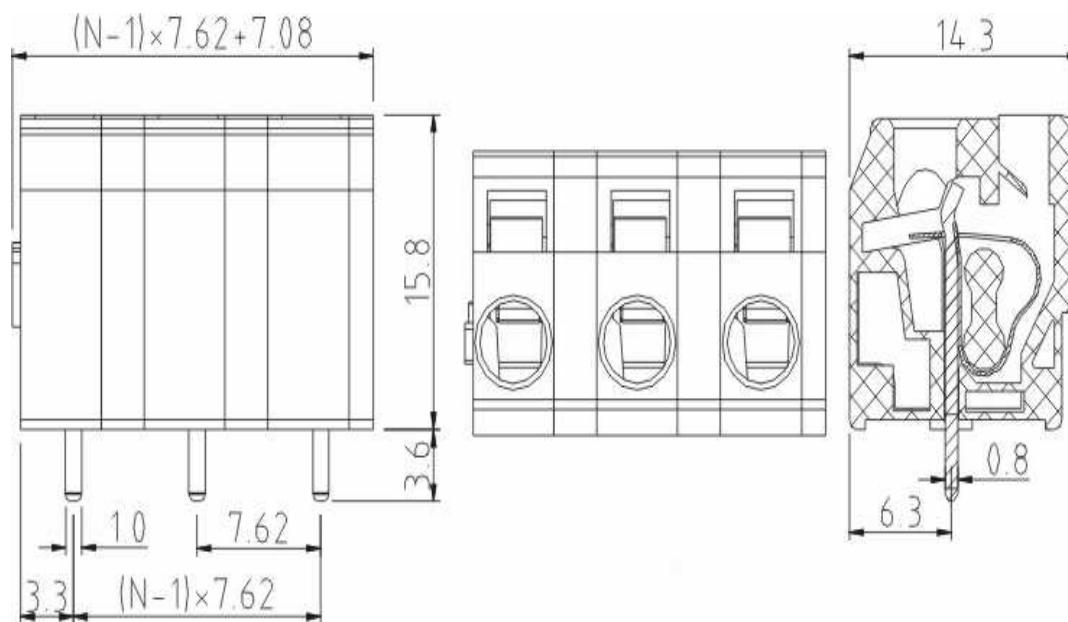


Screwless Terminal Block

Part No.: **A11R019**

Customer:

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 07.02.2014 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | 1 from 4 | |

EDCON-COMPONENTS



Ordering Informations

| Serie | No. of Pos. | Body Color | Approval | Approval Code | ROHS | Packing | EDCON Cust. No. | Customer Version | | |
|-------|-------------|------------|----------|---------------|------|---------|-----------------|------------------|--|--|
|-------|-------------|------------|----------|---------------|------|---------|-----------------|------------------|--|--|

| | | | | | | | | | | |
|----------------|-----------|-----------|----------|----------|----------|----------|--|--|--|--|
| A11R019 | 02 | GY | N | N | R | B | | | | |
|----------------|-----------|-----------|----------|----------|----------|----------|--|--|--|--|


| Pitch | 02= Number of Pos. | GY= Gray (Standard) | N= No Approval | N= NON Approval | R= ROHS Conform | B= Standard Package | xxxxxx= Customer Number | xxx= Customer Version ??(Printing) |
|-------|--------------------|---------------------|----------------|-----------------|-----------------|---------------------|-------------------------|------------------------------------|
|-------|--------------------|---------------------|----------------|-----------------|-----------------|---------------------|-------------------------|------------------------------------|

| | | | | | | | | |
|------|--------------------|------------|--------------------------------|---|---------------------|-----------------------|--|--|
| 7,62 | Standard 2~12 Pos. | GN= Green | 1= Approval for Material | A= UL /UR Approval Please consult EDCON for available | N= NON ROHS Conform | I= Individual Package | | |
| | | OR= Orange | 2= Approval for Terminal Block | B= VDE Approval Please consult EDCON for available | | | | |
| | | BK= Black | | C= TÜV Approval Please consult EDCON for available | | | | |

Screwless Terminal Block


Part No.: **A11R019**

| | | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|-----------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 07.02.2014 | Customer: |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | 3 from 4 | | |



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

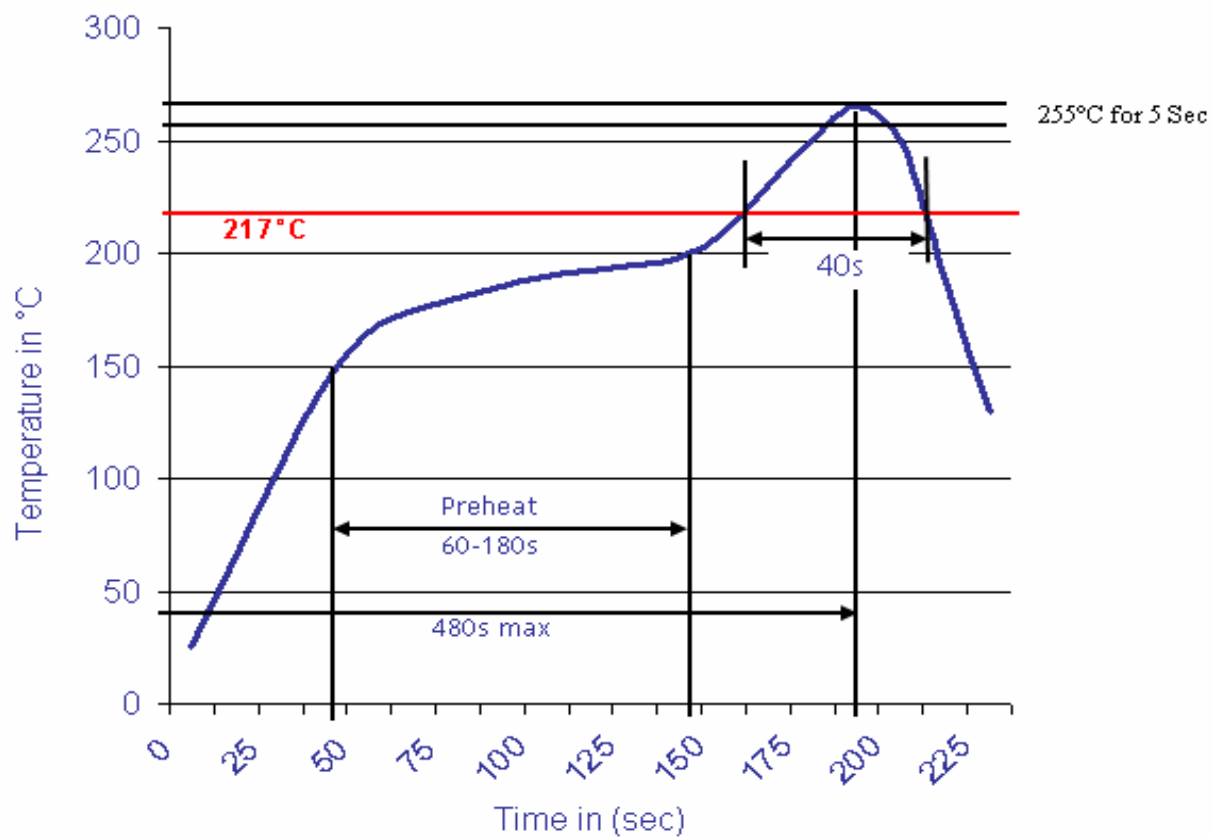

Screwless Terminal Block

Part No.: **A11R019**

Customer:

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 07.02.2014 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | 4 from 4 | |

