




EDCON-COMPONENTS



Drawing

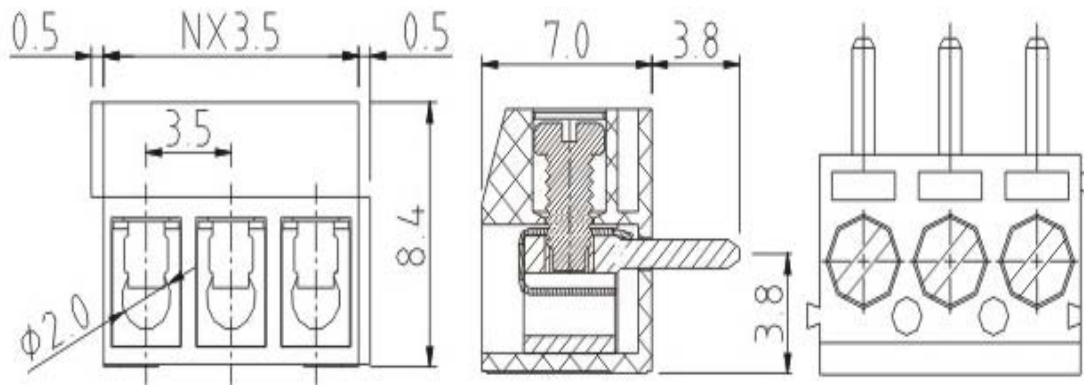

P.C.B. Layout

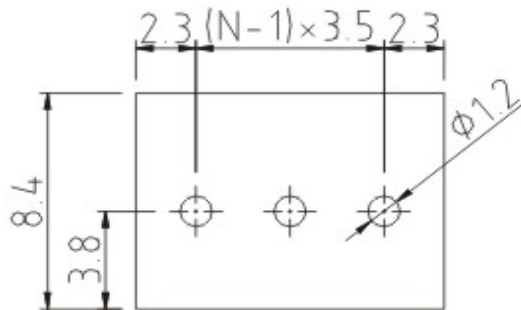

Specification

APPROVAL



Electrical:

Standard	UL
Rated voltage	125V
Rated current	10A
Wire range	26-16AWG
Withstanding voltage	1,25KV

Mechanical

Ambient temperature	-40°C ~ +115°C
Soldering temperature	250°C ±10°C/5sec
Strip length	5~6mm
Screw, Torque	M2, 0.2Nm (1.7Lb-In.)

Dimensions

Pitch	3.50mm
Poles	2P + 3P

Material

Housing	Thermoplastic (UL94V-0)
Surface of solder tail	Tin plated
Wire guard	Stainless steel
Terminal screw	Steel Zinc plated
Metal housing	Brass(CuZn)



Wire Protector Terminal Block /
Pitch 3.50mm

Part No.: A12G007


Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.3.2009
APPD:	Louis			FINISH	Georg			Sheet No.	1 from 2

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	wire protector	-	Customer Request
A12G007	-	XX	XX	-	X	-	X

XX = total	WH - white
	GN - green
	GR - gray <i>(standard)</i>
	PG - Phoenix Green
	OR - orange <i>(standard)</i>
	BK - black
	BL - blue
	LG - light gray

1 - with wire protector
2 - without wire protector



Wire Protector Terminal Block / Pitch 3.50mm	
Part No.:	A12G007
Customer:	

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.3.2009
APPD:	Louis			FINISH	Georg			Sheet No.	2 from 2