




# EDCON-COMPONENTS

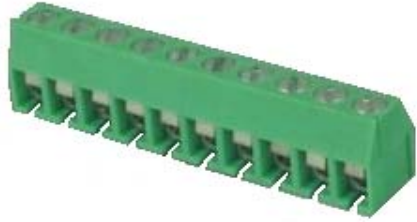

## Drawing

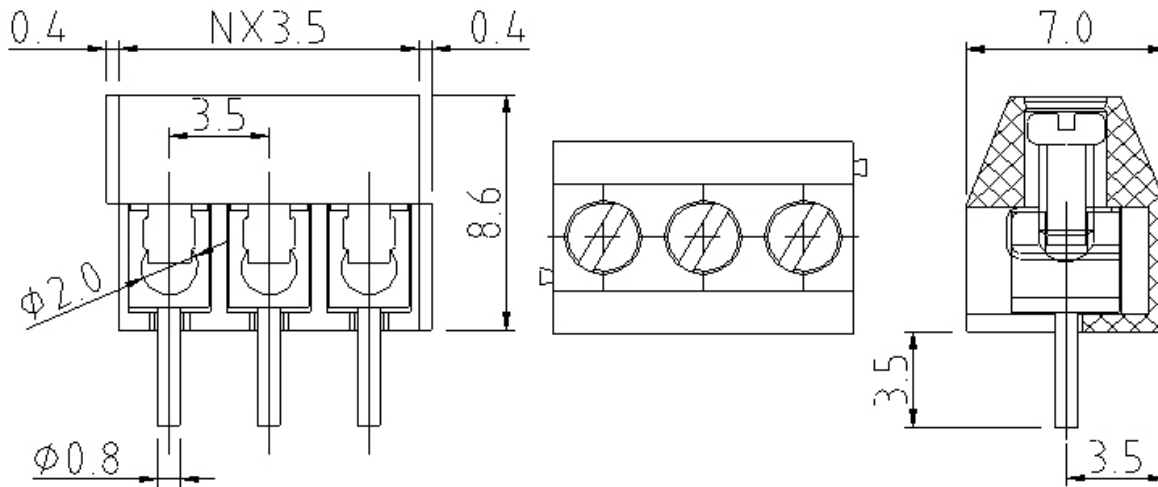

## P.C.B. Layout

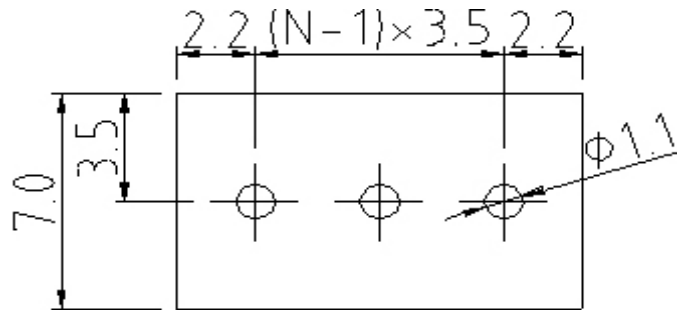

## Specification

### APPROVAL

#### Electrical:

Standard  
Rated voltage  
Rated current  
Wire range  
Withstanding voltage



UL  
125V  
10A  
26-16AWG  
1,25KV

#### Mechanical

Ambient temperature  
Soldering temperature  
Strip length  
Screw, Torque

-40°C ~ +115°C  
250°C ±10°C/5sec  
5~6mm  
M2, 0.2Nm (1.7Lb-In.)

#### Dimensions

Pitch  
Poles

3.50mm  
2P - 24P

#### Material

Housing  
Surface of solder tail  
Wire guard  
Terminal screw  
Metal housing

Thermoplastic (UL94V-0)  
Tin plated  
Stainless steel  
Steel Zinc plated  
Brass(CuZn)



Wire Protector Terminal Block /  
Pitch 3.50mm

Part No.: A12G009


Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.3.2009
APPD:	Louis			FINISH	Georg			Sheet No.	1 from 2

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS

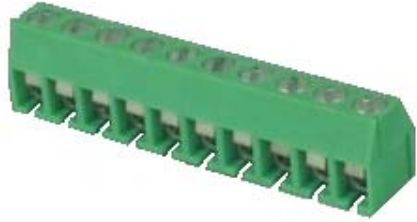

## Ordering Informations

Serie	-	No. of Pole	Body-Color	-	wire protector	-	Customer Request
<b>A12G009</b>	-	<b>XX</b>	<b>XX</b>	-	<b>X</b>	-	<b>X</b>

XX = total	<b>WH</b> - white
	<b>GN</b> - green
	<b>GR</b> - gray (standard)
	<b>PG</b> - Phoenix Green
	<b>OR</b> - orange (standard)
	<b>BK</b> - black
	<b>BL</b> - blue
	<b>LG</b> - light gray

<b>1</b> - with wire protector
<b>2</b> - without wire protector



Wire Protector Terminal Block / Pitch 3.50mm	
Part No.:	A12G009
Customer:	

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.3.2009
APPD:	Louis			FINISH	Georg		Sheet No.		2 from 2