



EDCON-COMPONENTS



Drawing

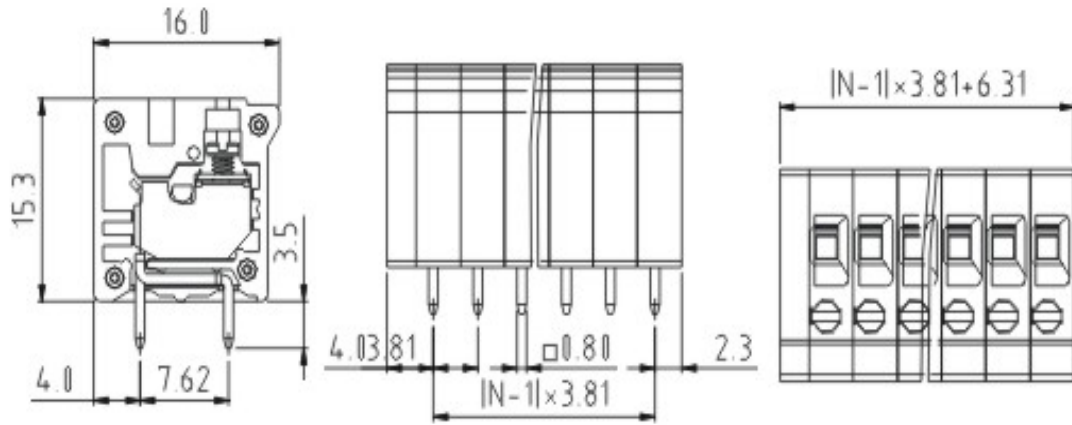

P.C.B. Layout

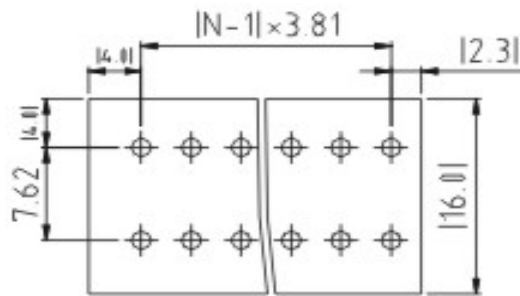

Specification

PENDING APPROVAL

(cULus)
pending

Electrical:

Standard	cULus
Rated voltage	300V
Rated current	8A
Wire range	28-16AWG
Withstanding voltage	1,6KV

Mechanical

Ambient temperature	-40°C ~ +115°C
Soldering temperature	250°C ±10°C/5sec
Strip length	8-9mm
Screw, Torque	M2, 0.2Nm (1.7Lb-In.)

Dimensions

Pitch	3.81mm
Poles	2P - 24P

Material

Housing	Thermoplastic (UL94V-0)
Surface of solder tail	Tin plated
Contact	Brass
Terminal screw	Steel Zinc plated
Metal housing	Steel stamped

Wire Protector Terminal Block /
Pitch 3.81mm

Part No.: A12H004

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.3.2009
APPD:	Louis			FINISH	Georg			Sheet No.	1 from 2

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	-	No. of Pole	Body-Color	-	wire protector	-	Customer Request
A12H004	-	XX	XX	-	X	-	X

XX = total	WH - white
	GN - green
	GR - gray (standard)
	PG - Phoenix Green
	OR - orange (standard)
	BK - black
	BL - blue
	LG - light gray

1 - with wire protector
2 - without wire protector



Wire Protector Terminal Block / Pitch 3.81mm	
Part No.:	A12H004
Customer:	

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.3.2009
APPD:	Louis			FINISH	Georg			Sheet No.	2 from 2