


EDCON-COMPONENTS



Drawing

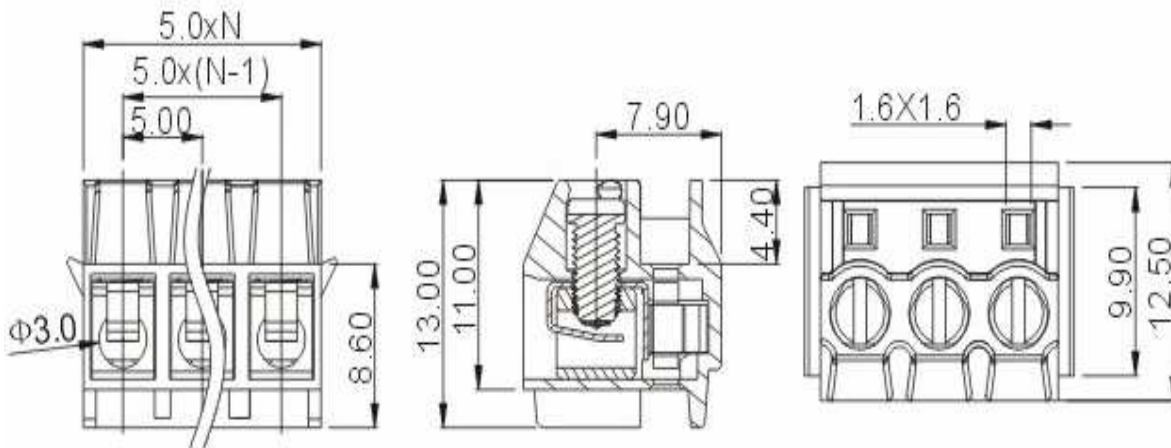

P.C.B. Layout

Specification

Electrical

Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	12A
Wire range	28-14 AWG	2.5mm ²
Withstanding voltage	AC2000V/1Min	

Mechanical

Ambient temperature	-40°C ~ +105°C
Strip length	5 ~ 6mm
Screw, Torque	M2.5, 0.4Nm (3.5Lb-In.)

Dimensions

Pitch	5.00mm
Poles	2P - 20P

Material

Housing	PA66 (UL94V-0)
Contact	Phosphor Bronze
Screw	steel, Cr ³⁺ Zn plated
Cage	Brass, Ni plated



Wire Protector Terminal Block /
Pitch 5.00mm

Part No.: A12L014

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.03.2009
APPD:	Louis			FINISH	Georg		Sheet No.		1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	-	No. of Pole	Body-Color	wire protector	Screw	-	Customer Request
A12L014	-	XX	XX	X	X	-	X


XX = total	WH - white	1 - with wire protector	A - Slotted screw (standard)
	GN - green	2 - without wire protector	B - Cross-slotted screw
	GR - gray		
	LG - light gray		



PG - Phoenix Green
OR - orange
BL - blue
BK - black



wire protector



without wire protector



Wire Protector Terminal Block /
Pitch 5.00mm

Part No.: A12L014

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.03.2009
APPD:	Louis			FINISH	Georg			Sheet No.	2 from 3


www.edcon-components.com

email: info@edcon-components.com



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

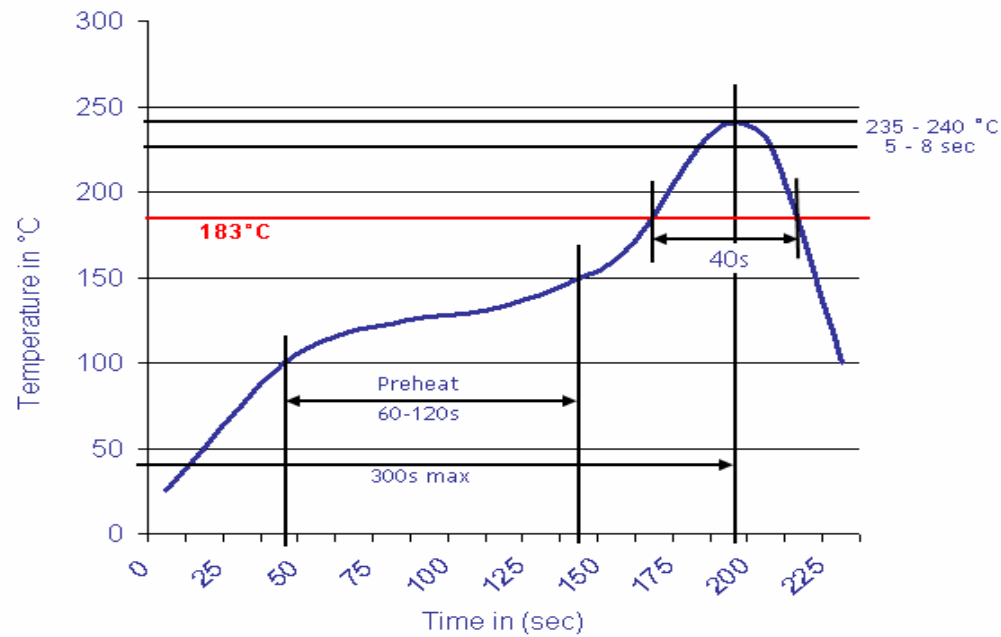

Wire Protector Terminal Block /
Pitch 5.00mm

Part No.: A12L014

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.03.2009
APPD:	Louis			FINISH	Georg			Sheet No.	3 from 3

Customer: