



EDCON-COMPONENTS



Drawing

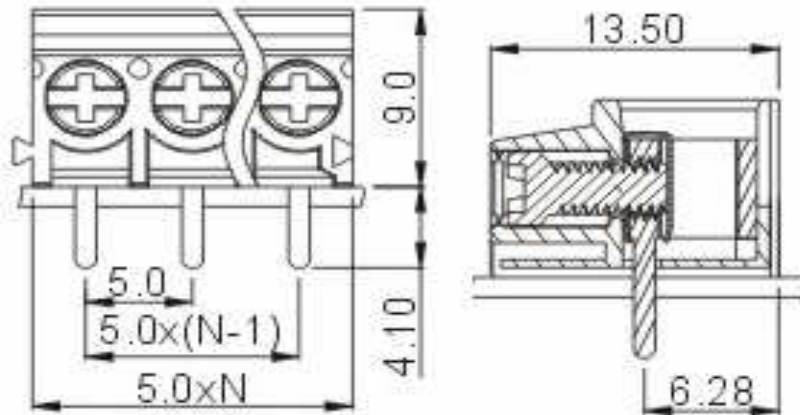

P.C.B. Layout

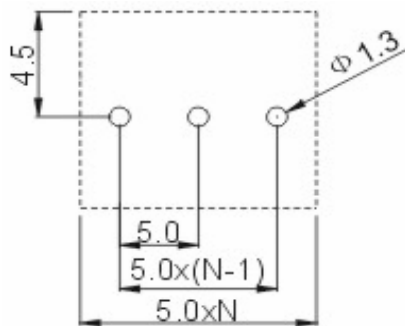

Specification

Electrical

Standard	UL	IEC
Rated voltage	300V	250V
Rated current	20A	25A
Wire range	20-12 AWG	0.5-4.0mm ²
Withstanding voltage	AC2000V/1Min	

Mechanical

Ambient temperature	-40°C ~ +105°C
Strip length	6.5mm
Screw, Torque	M2.5, 0.4Nm (3.5Lb-In.)

Dimensions

Pitch	5.00mm
Poles	2P, 3P-24P

Material

Housing	PA66 (UL94V-0)
Pin header	Brass, Tin plated
Screw	steel, Cr ³⁺ Zn plated
Wire guard	Stainless steel



Wire Protector Terminal Block /
Pitch 5.00mm

Part No.: A12L015

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.03.2009
APPD:	Louis			FINISH	Georg			Sheet No.	1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations


Serie	-	No. of Pole	Body-Color	wire protector	Screw	-	Customer Request
A12L015	-	XX	XX	X	X	-	X

XX = total	WH - white	1 - with wire protector	A - Slotted screw
	GN - green	2 - without wire protector	B - Cross-slotted screw (standard)
	GR - gray		
	BL - blue		

PG - Phoenix Green
OR - orange
LG - light gray
BK - black



wire protector



without wire protector



Wire Protector Terminal Block /
Pitch 5.00mm

Part No.: A12L015

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.03.2009
APPD:	Louis			FINISH	Georg			Sheet No.	2 from 3


www.edcon-components.com

email: info@edcon-components.com



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

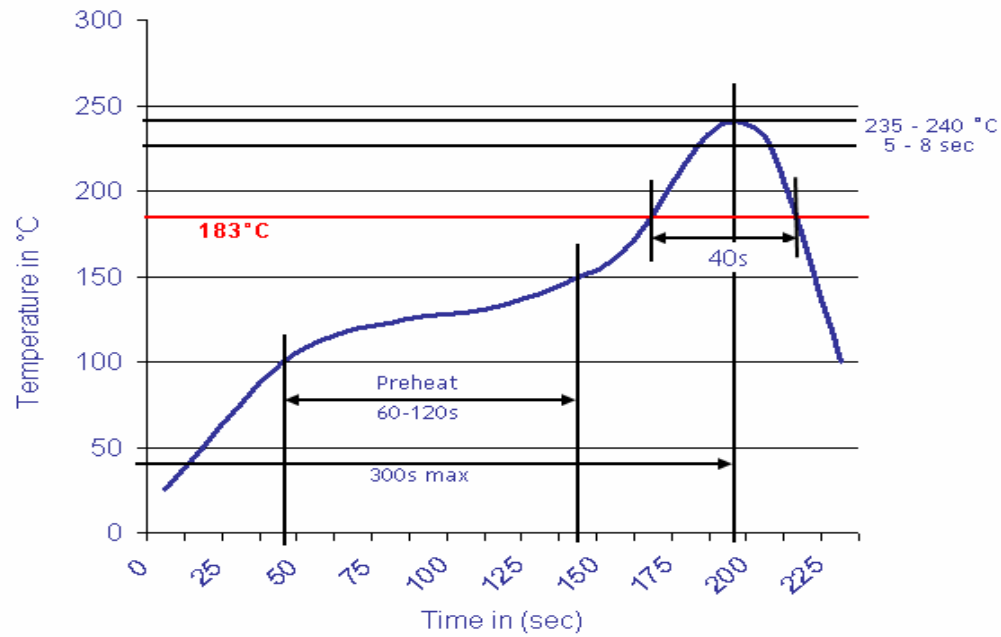

Wire Protector Terminal Block /
Pitch 5.00mm

Part No.: A12L015

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.03.2009
APPD:	Louis			FINISH	Georg		Sheet No.	3 from 3	

Customer: