



EDCON-COMPONENTS



Drawing

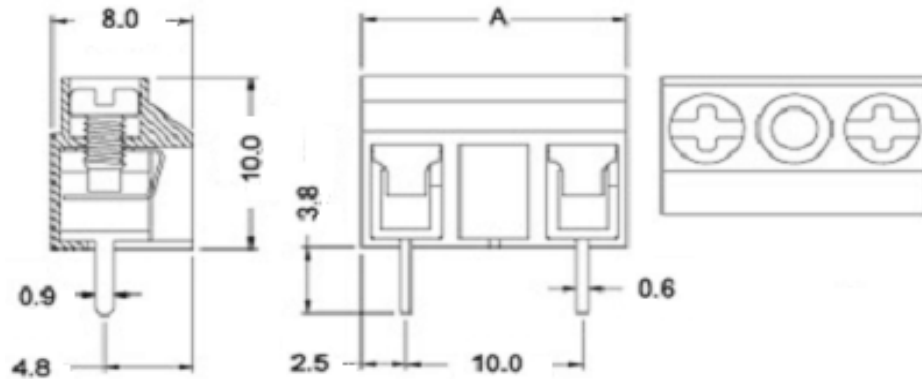

P.C.B. Layout

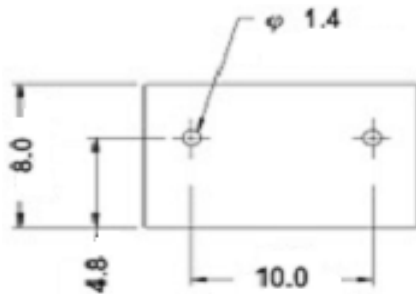

Pol	A[mm]
02	15.0
03	25.0
04	35.0
05	45.0
06	55.0
07	65.0
08	75.0
09	85.0
10	95.0
11	105.0
12	115.0
13	125.0
14	135.0

Specification

APPROVAL



Electrical

Standard	cULus
Rated voltage	300V
Rated current	15A
Wire range	26-14 AWG

Mechanical

Ambient temperature	-40°C ~ +105°C
Screw, Torque	M2.6, 0.34Nm (3.0Lb-In.)

Dimensions

Pitch	10.00mm
Poles	2P - 14P

Material

Housing	PA660 (UL94V-0)
Pin header	Brass, Tin-plated
Screw	steel, Nickel-plated
Wire guard	Stainless strip steel



Certification



Wire Protector Terminal Block /
Pitch 10.00mm

Part No.: A12T003

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	15.3.2009
APPD:	Louis			FINISH	Georg		Sheet No.	1 from 3	

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS




Ordering Informations


Serie	-	No. of Pole	Body-Color	wire protector	Screw	-	Customer Request
A12T003	-	XX	XX	X	X	-	X

XX = total	WH - white	1 - with wire protector	A - Slotted screw
02	GN - green	2 - without wire protector	B - Cross-slotted screw (standard)
...	GR - gray		
14	BL - blue		

PG - Phoenix Green
OR - orange
LG - light gray
BK - black



wire protector



without wire protector



Certification



Wire Protector Terminal Block /
Pitch 10.00mm

Part No.: A12T003

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	15.3.2009
APPD:	Louis			FINISH	Georg			Sheet No.	2 from 3


www.edcon-components.com

email: info@edcon-components.com



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

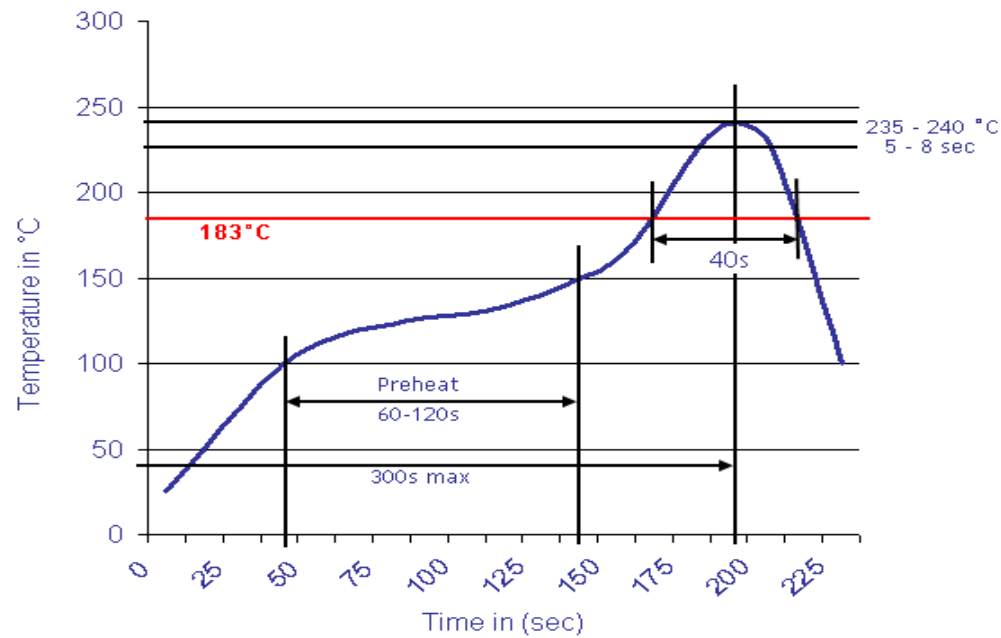

Wire Protector Terminal Block /
Pitch 10.00mm

Part No.: A12T003

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	15.3.2009
APPD:	Louis			FINISH	Georg		Sheet No.	3 from 3	

Customer: