



EDCON-COMPONENTS



Drawing

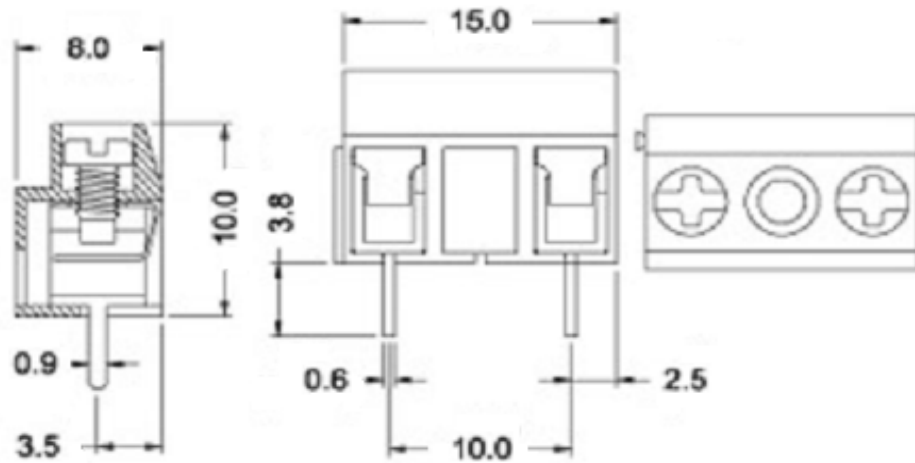

P.C.B. Layout

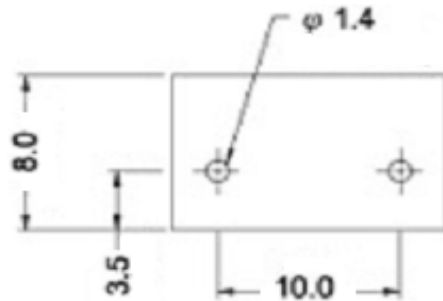

Specification

APPROVAL



Electrical

Standard	cULus
Rated voltage	300V
Rated current	15A
Wire range	26-14AWG

Mechanical

Ambient temperature	-40°C ~ +105°C
Torque	0.3Nm (2.5Lb-In.)

Dimensions

Pitch	10.00mm
Poles	2P - 14P

Material

Housing	PA66, UL94V-0
Pin header	Brass, Tin-plated
Screw	M2.6, steel, Nickel-plated
Wire guard	Stainless strip steel



Certification



Wire Protector Terminal Block /
Pitch 10.00mm

Part No.: A12T005

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	15.3.2009
APPD:	Louis			FINISH	Georg			Sheet No.	1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS





Ordering Informations

Serie	-	No. of Pole	Body-Color	-	wire protector	-	Screw	-	Customer Request
A12T005	-	XX	XX	-	X	-	X	-	X

XX = total	WH - white
02P	GN - green
...	GR - gray
14P	LG - light gray
	PG - Phoenix Green
	OR - orange
	BL - blue
	BK - black

1 - with wire protector
2 - without wire protector

A - Slotted screw
B - Cross-slotted screw (standard)

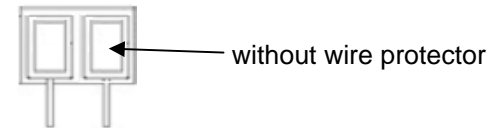

[Certification](#)



Wire Protector Terminal Block /
Pitch 10.00mm

Part No.: A12T005

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	15.3.2009
APPD:	Louis			FINISH	Georg			Sheet No.	2 from 3

www.edcon-components.com

email: info@edcon-components.com



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)



Wire Protector Terminal Block /
Pitch 10.00mm

Part No.: A12T005

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	15.3.2009
APPD:	Louis			FINISH	Georg		Sheet No.	3 from 3	