

Data Sheet

Dual-Row R/A Wafer Terminal Block w. Hook THT 3,50mm

Pitch: 2,54 mm

Serie: A14F026

Customer Information for special Item

EDCON Customer : xxxxxx

Customer Version No. : xx


EDCON-COMPONENTS



Technical Discription

Drawing (Dimension in mm)

UL/CUL 技术参数 UL/CUL Technical Data	UL			
等级 Use Group	B	C	D	
额定电压 Rated Voltage [V]	150	-	-	
额定电流 Rated Current [A]	5	-	-	
接线范围 Wire Range	-			
单/多芯线 Solid/Stranded [AWG]	-			
耐电压 Withstanding Voltage	1300V/1Min			
IEC 技术参数 IEC Technical Data	IEC			
过电压类别 Overvoltage Category	III	III	II	
污染等级 Contamination Class	3	2	2	
额定电压 Rated Voltage [V]	-	160	320	
额定电流 Rated Current [A]	-	6	6	
额定冲击电压 Impulse withstand voltagea [KV]	-	2.5	2.5	
导线截面积 Conductor cross section 硬质/柔性导线 Solid/flexible [mm ²]	-			
材料 Material				
绝缘材料 Insulation Material	PA46			
阻燃等级 Inflammability	UL94V-0			
导体材料 Contactor Material	铜合金 Copper alloy			
导体表面镀层 Contactive Coating	镀锡 Tin Plated			
一般参数 Other Data				
间距 Pitch [mm]	2.54			
极数 Poles [P]	2x(02-24)			
剥线长度 Stripping Length [mm]	-			
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			
工作温度 Operating temperatur [°C]	-40~+120			
引针尺寸 Pin Dimensions [mm]	2.60			
PCB板孔径 PCB Hole Diameter [mm]	Ø1.40 / Ø1.80			

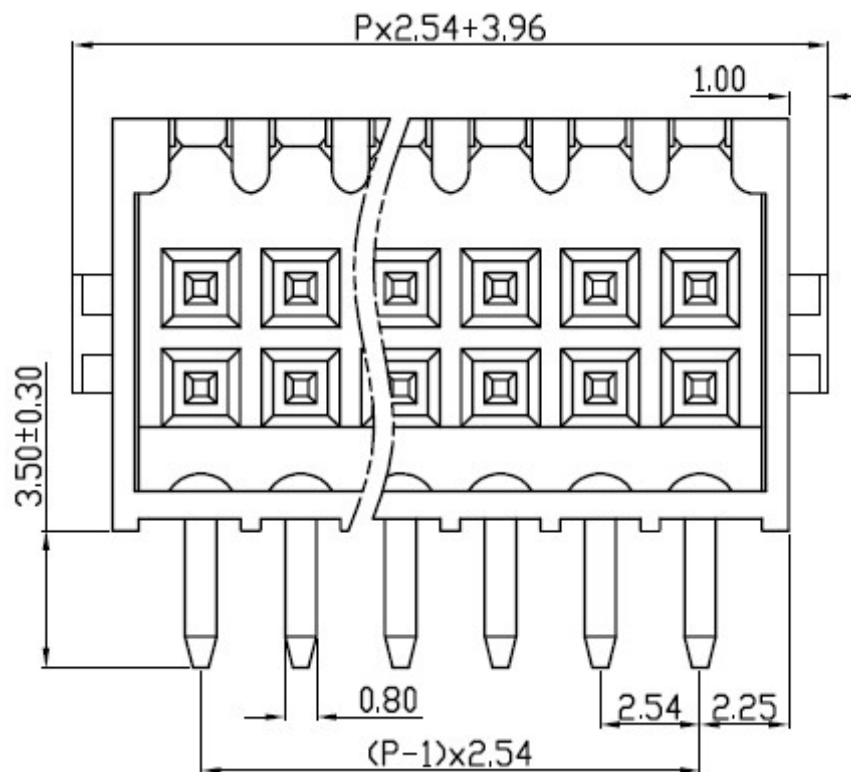

Tolerances unless otherwise specified (mm)									
X	X.X	X.XX	X.XXX	Angle					
±	±	±	±	±3°					
DRW:	Jason	CHKD:	Wilson	MATL:	Wilson	TOLERANCE:	Mason	DATE:	03.05.2026
APPD:	Schumi	FINISH:	Jamy	Sheet No.:	1 from 4				

Dual-Row R/A Wafer Terminal Block w. Hook THT 3,50mm

Part No.: **A14F026**





Customer:

EDCON-COMPONENTS



Drawing (Dimension in mm)

PCB Layout (unit /mm) PCB-View

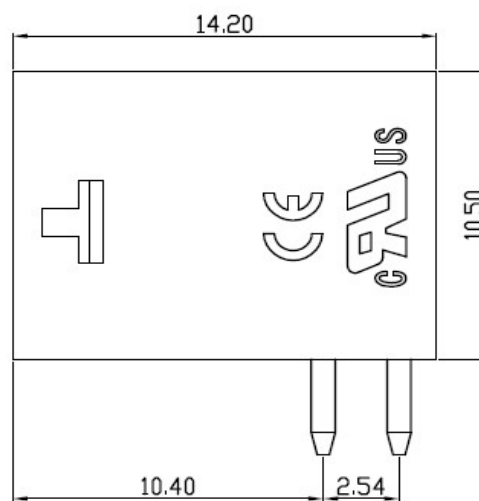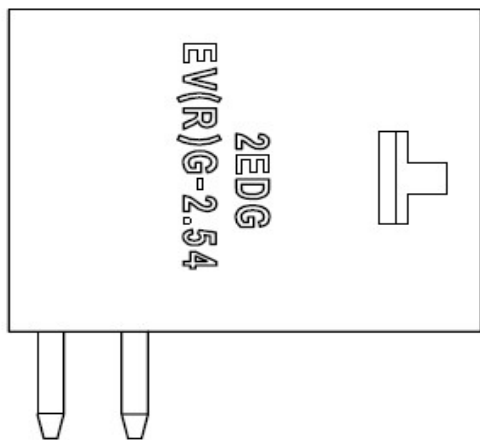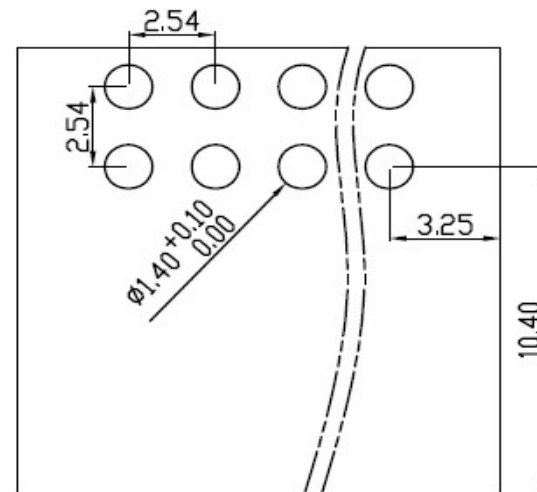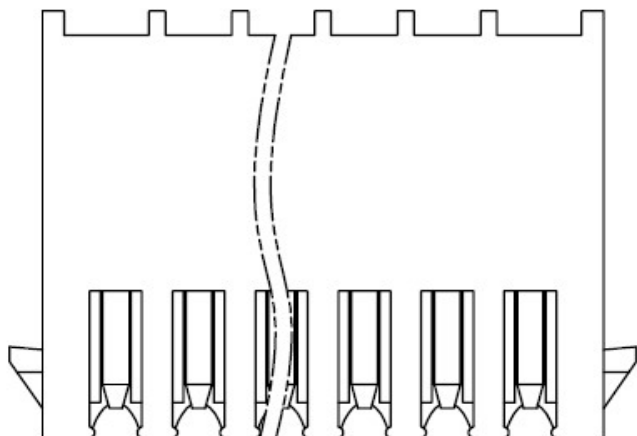

Dual-Row R/A Wafer Terminal Block w. Hook THT 3,50mm	
Part No.:	A14F026
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.05.2026
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 4

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	Body Color	Special function	Approval Code	ROHS	Packing	EDCON Cust. No.	Customer Version		
A14F026	04	BK	N	N	R	B	xxxxxx	xx		

Pitch 2,54	04 = Number of Pos.2x2P Standard 4 ~ 48Pos.		N = No special function	N = NON Approval 1 = UL-Approval for Material A = UL /UR Approval Please consult EDCON for available B = VDE Approval Please consult EDCON for available C = TÜV Approval Please consult EDCON for available	R = ROHS Conform N = NON ROHS Conform	B = Bulk-Ware I = Individual Package	xxxxxx = Customer Number	xx = Customer Version ??(Printing)
	BK = Black							

Dual-Row R/A Wafer Terminal Block w. Hook THT 3,50mm	
Part No.:	A14F026
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.05.2026
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile

Classification Reflow Profile (JEDEC J-STD-020C)



Classification Reflow Profile (JEDEC J-STD-020C)



Dual-Row R/A Wafer Terminal
Block w. Hook THT 3,50mm

Part No.: **A14F026**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	03.05.2026
APPD:	Schumi			FINISH	Jamy		Sheet No.		4 from 4