

# Data Sheet

## Plug Screwless-Type w. mounting Flange

**Pitch: 5,08 mm**


**Serie: A14M136**

### Customer Information for special Item

**EDCON Customer : 0**

**Customer Version No. : 0**

# EDCON-COMPONENTS




## Technical Discription

UL/CUL Techn.Data			
Use Group	B	C	D
Rated Voltage: (V)	300	-	300
Rated Current: (A)	12	-	10
Wire Range Solid / Stranged	24~12AWG		
Withstanding Voltage:	1600V/1Min		
IEC Techn. Data VDE			
Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage: (V)	250	320	630
Rated Current: (A)	12	12	12
Impulse withstand Voltage (KV)	4,0	4,0	4,0
Conductor Cross Section (mm <sup>2</sup> )	0,5~2,5mm <sup>2</sup>		

Material	
Insulator Material:	PA66
Imflammability:	UL94V-0
Contact Material	Copper Alloy
Surface Coating:	Tin Plated

Other Informations	
Pitch:(mm)	5,08
Poles: (P)	2 ~ 24
Stripping Length: (mm)	10~11
Srew Torque max.(Nm)	
Operating Temp.: (°C)	-.40°C to +105°C
Pin Dimension: (mm)	
PCB Hole Diamter (mm)	
Screw-Size	

## Drawing (Dimension in mm)

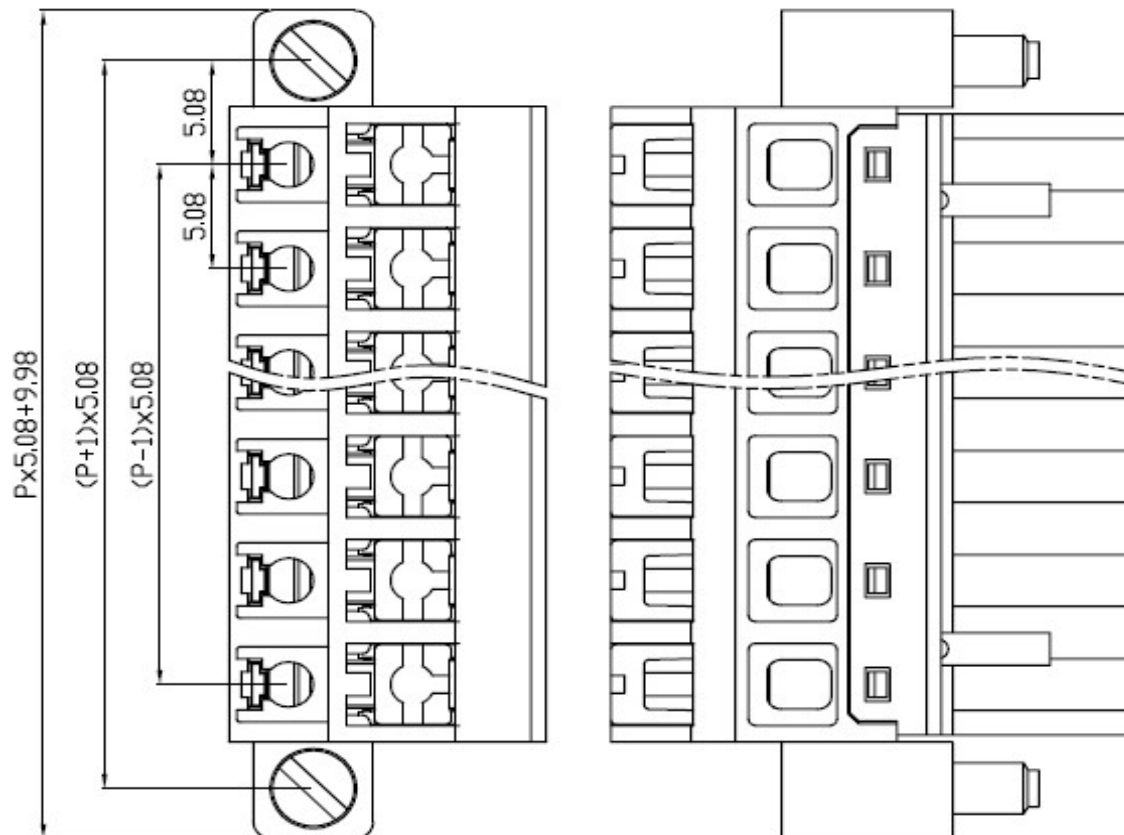


Tolerances unless otherwise specified (mm)				
x	x.x	x.xx	x.xxx	Angle
±	±0,60	±0,30	±0,10	±3°
DRW:	Jason	CHKD	Wilson	MATL:
APPD:	Schumi			FINISH
				TOLERANCE
				DATE
				Sheet No.
				23.07.2023
				1 from 3

<b>Plug Screwless-Type w. mounting Flange</b>	
Part No.:	<b>A14M136</b>
Customer:	


[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS




Drawing (Dimension in mm)

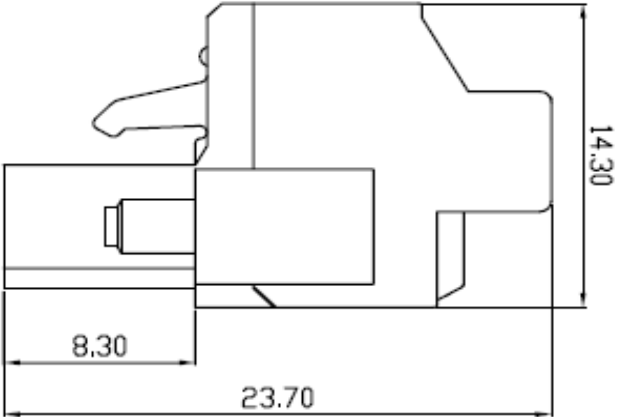

<b>Plug Screwless-Type w. mounting Flange</b>	
Part No.:	<b>A14M136</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	23.07.2023
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3

# EDCON-COMPONENTS



## Ordering Informations

Serie	No. of Pos.	Body Color	Screw Type	Approval Code	ROHS	Packing	EDCON Cust. No.	Customer Version		
-------	-------------	------------	------------	---------------	------	---------	-----------------	------------------	--	--

<b>A14M136</b>	<b>XX</b>	<b>PG</b>	<b>C</b>	<b>N</b>	<b>R</b>	<b>B</b>				
----------------	-----------	-----------	----------	----------	----------	----------	--	--	--	--

Pitch  
5,08

02= Number of Pos. Standard 2 ~ 24Pos.	PG= Phoenix Green (Standard)		N= NON Approval	R= ROHS Conform	B= Bulk-Ware I= Individual Package	xxxxxx= Customer Number	xxx= Customer Version ??(Printing)
	WH= White		A= UL /UR Approval Please consult EDCON for available	N= NON ROHS Conform			
	GN= Green		B= VDE Approval Please consult EDCON for available	C= TÜV Approval Please consult EDCON for available			
	GY= Gray						
	LG= Light Gray						
	OR= Orange						
	BL= Blue	C= Screwless Type					
	BK= Black						

<b>Plug Screwless-Type w. mounting Flange</b>
Part No.: <b>A14M136</b>
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	23.07.2023
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)