



Cross Section: 0,4~4mm" Stranded and solid
Electrical Specs: 450V / 32A


Strip Length 11mm (10~12mm)
Material (PC)
Maximum Operating Temp.: -40°C to +105°C

Features

Wide range of wire sizes
Combination of different wire sizes in one Cage Clamp
Small space consumption
Built in test point
Protection against electrical Shock touch safe
Low installed cost and safe operation
Maintenance-free connection
A reusable connector

Dimensions

2Pos. H=9,9mm / W=13,1mm / D=17,7mm (2,1gr.)
3Pos. H=9,9mm / W=18,7mm / D=17,7mm (3,0gr.)
4Pos. H=9,9mm / W=24,3mm / D=17,7mm (3,9gr.)
5Pos. H=9,9mm / W=29,9mm / D=17,7mm (5,2gr.)
Color of Body Clear with LIGHT BLUE levers)
Color of Body Clear with WHITE levers)
Color of Body Clear with RED levers)
Color of Body Clear with ORANGE levers)

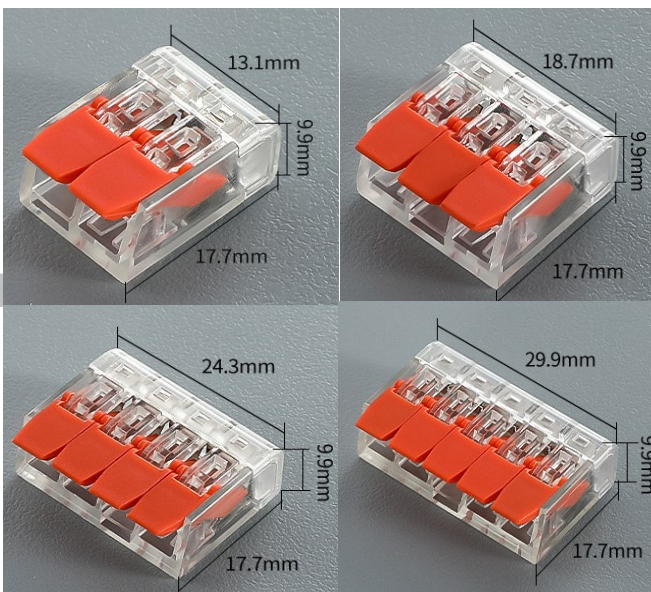

Ordering Informations:

Item-No.	Circuit	Body Color	Lever Colour	ROHS	Packing	
A16024	2	CL	LB	R	BU	
2, 3, 4, 5 Pos.	CL= Clear	LB= Light Blue	R= ROHS	BU= Bulk Ware		
		WH= White	N= Non ROHS			
		RD= Red				
		OR= Orange				

Push Wire Connector

Part No.: **A16024**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	DATE	27.01.2025
APPD:	Jason			FINISH	Jamy	Sheet	1 from 1

Copyright by S.Tiede