



Technical Specification

Insulator Material: High Temperature Nylon 46 UL94V-0
 Contact Resistance: 30m Ohm max.
 Insulator Resistance: 1000M Ohm max.
 Temperature Rating: -55°C ~ 85°C
 Contact Material: Stainless Steel
 Contact: Nickel Plate Tin / Gold Flash Plated
 Dielectric Voltage: 750VAC
 Durability: 50 Cycles min.
 Application for: Coin Type

Battery Type: 2Cell 2012, 2016

Dimension of Holder

Inch					
		D	H		
		0,278	0,290		

mm					
		D	H		
		7,1	7,4		

Ordering Information

Serie	Contact Material	Contact Plating	ROHS	Packing		
-------	------------------	-----------------	------	---------	--	--

B23111	-	ST	NI	R	BU	
---------------	---	-----------	-----------	----------	-----------	--

		N= Non ROHS	BU= Bulk-Ware
	GF= Gold Flash	R= ROHS Conform	TR= Tape / Reel
ST= Steel	NI= Nickel plated		

Battery Coin Cell Holder SMD




Part No.: **B23111**

Customer:


DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	04.11.2018
APPD:	Join			FINISH	Shieh	Sheet	1 from 3



Technical Dimensions (inch / mm)

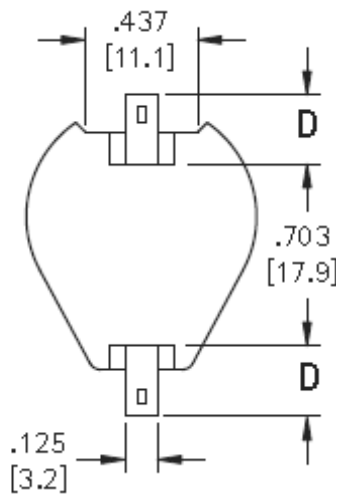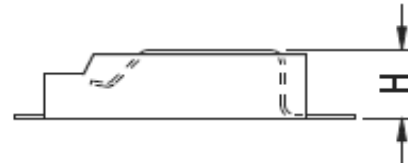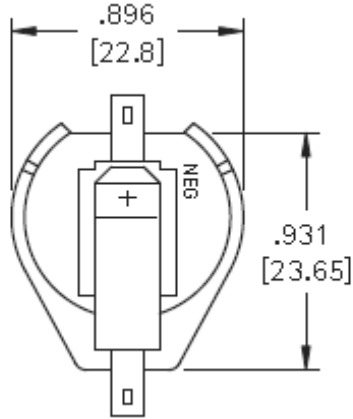

PCB Layout (inch / mm)




Battery Coin Cell Holder SMD	
Part No.:	B23111
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	04.11.2018
APPD:	Join			FINISH	Shieh	Sheet	2 from 3



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

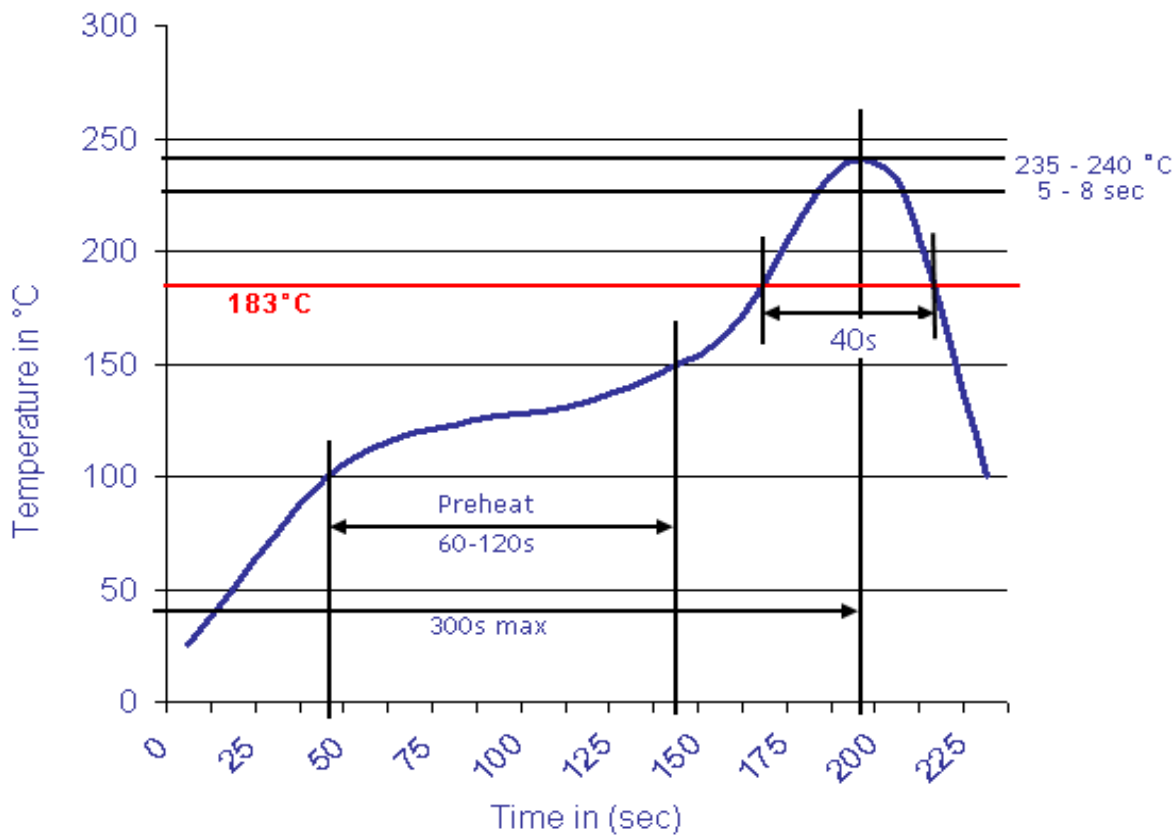

**Battery Coin Cell Holder
 SMD**

Part No.: **B23111**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	04.11.2018
APPD:	Join			FINISH	Shieh	Sheet	3 from 3