



Technical Specification

| | |
|-----------------------|-------------------|
| Insulator Material: | Nylon 46 UL94V-0 |
| Contact Resistance: | 30m Ohm max. |
| Insulator Resistance: | 1000M Ohm max. |
| Temperature Rating: | .-50°C ~ 145°C |
| Contact Material: | Steel |
| Contact: | Gold Flash Plated |
| Dielectric Voltage: | 750VAC |
| Durability: | 50 Cycles min. |
| Application for: | Coin Cell |
| Battery Type: 1Cell | 2320, 2325 |
| Battery Type: 2Cell | Not available |

Dimension of Holder

| Inch | | | | | |
|------|--|--|--|--|--|
| | | | | | |
| | | | | | |

| mm | | | | | |
|----|--|--|--|--|--|
| | | | | | |
| | | | | | |

Ordering Information

| Serie | Contact Material | Contact Plating | ROHS | Packing | | |
|-------|------------------|-----------------|------|---------|--|--|
|-------|------------------|-----------------|------|---------|--|--|

| | | | | | | |
|---------------|---|-----------|-----------|----------|-----------|--|
| B23126 | - | ST | NI | R | BU | |
|---------------|---|-----------|-----------|----------|-----------|--|




| | | | |
|------------------|-----------------------|------------------------|-----------------------|
| | | N= Non ROHS | BU= Bulk-Ware |
| ST= Steel | GF= Gold Flash | R= ROHS Conform | TR=Tape / Reel |
| | | | |

| Battery Coin Cell Holder SMD | |
|-------------------------------------|---------------|
| Part No.: | B23126 |
| Customer: | |


| | | | | | | | |
|-------|-------|------|-------|--------|-------|-------|------------|
| DRW: | Jason | CHKD | Jules | MATL: | Wu | DATE | 04.11.2018 |
| APPD: | Join | | | FINISH | Shieh | Sheet | 1 from 3 |



Technical Dimensions (inch / mm)

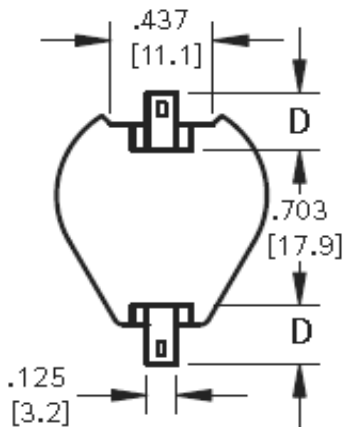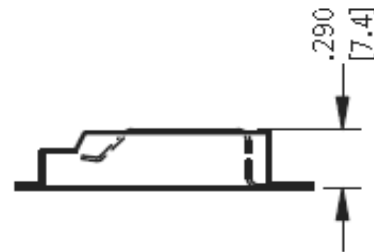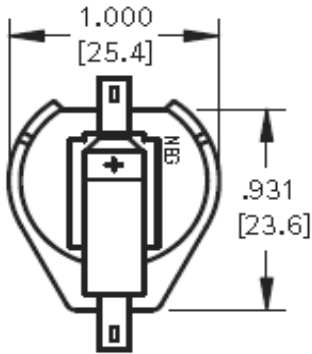

PCB Layout (inch / mm)




| | |
|-------------------------------------|---------------|
| Battery Coin Cell Holder SMD | |
| Part No.: | B23126 |
| Customer: | |

| | | | | | | | |
|-------|-------|------|-------|--------|-------|-------|------------|
| DRW: | Jason | CHKD | Jules | MATL: | Wu | DATE | 04.11.2018 |
| APPD: | Join | | | FINISH | Shieh | Sheet | 2 from 3 |



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

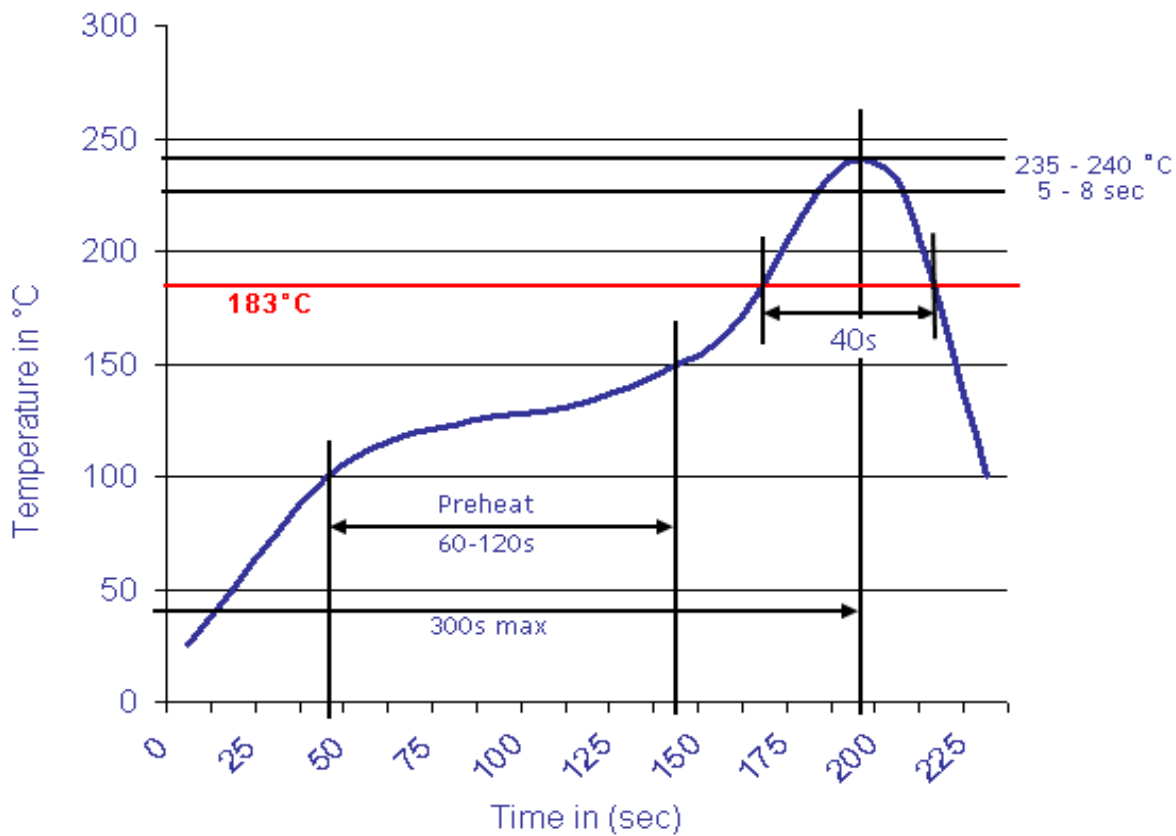

| | |
|---|---------------|
| Battery Coin Cell Holder SMD | |
| Part No.: | B23126 |
| Customer: | |

| | | | | | | | |
|-------|-------|------|-------|--------|-------|-------|------------|
| DRW: | Jason | CHKD | Jules | MATL: | Wu | DATE | 04.11.2018 |
| APPD: | Join | | | FINISH | Shieh | Sheet | 3 from 3 |