



**Technical Specification**

|                       |                   |
|-----------------------|-------------------|
| Insulator Material:   | Nylon 46 UL94V-0  |
| Contact Resistance:   | 30m Ohm max.      |
| Insulator Resistance: | 1000M Ohm max.    |
| Temperature Rating:   | .-50°C ~ 145°C    |
| Contact Material:     | Steel             |
| Contact:              | Gold Flash Plated |
| Dielectric Voltage:   | 750VAC            |
| Durability:           | 50 Cycles min.    |
| Application for:      | Coin Cell         |
| Battery Type: 1Cell   | 2330, 2335        |
| Battery Type: 2Cell   | Not available     |

**Dimension of Holder**

**Inch**

|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|  |  |  |  |  |  |

**mm**

|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|  |  |  |  |  |  |

**Ordering Information**

| Serie | Contact Material | Contact Plating | ROHS | Packing |  |  |
|-------|------------------|-----------------|------|---------|--|--|
|-------|------------------|-----------------|------|---------|--|--|

|               |   |           |           |          |           |  |
|---------------|---|-----------|-----------|----------|-----------|--|
| <b>B23127</b> | - | <b>ST</b> | <b>NI</b> | <b>R</b> | <b>BU</b> |  |
|---------------|---|-----------|-----------|----------|-----------|--|




|                  |                       |                        |                        |
|------------------|-----------------------|------------------------|------------------------|
|                  |                       | <b>N=</b> Non ROHS     | <b>BU=</b> Bulk-Ware   |
| <b>ST=</b> Steel | <b>GF=</b> Gold Flash | <b>R=</b> ROHS Conform | <b>TR=</b> Tape / Reel |
|                  |                       |                        |                        |

|                                     |               |
|-------------------------------------|---------------|
| <b>Battery Coin Cell Holder SMD</b> |               |
| Part No.:                           | <b>B23127</b> |
| Customer:                           |               |


|       |       |      |       |        |       |       |            |
|-------|-------|------|-------|--------|-------|-------|------------|
| DRW:  | Jason | CHKD | Jules | MATL:  | Wu    | DATE  | 04.11.2018 |
| APPD: | Join  |      |       | FINISH | Shieh | Sheet | 1 from 3   |



**Technical Dimensions (inch / mm)**

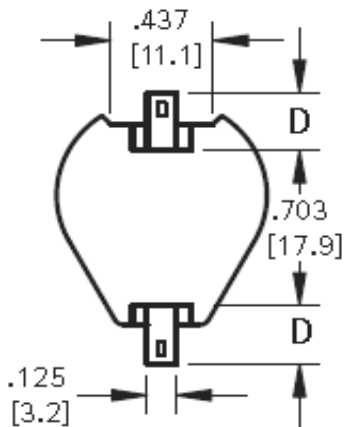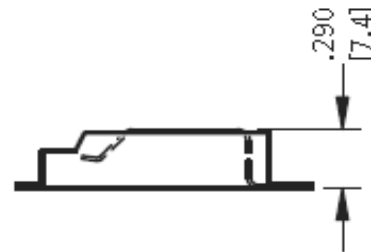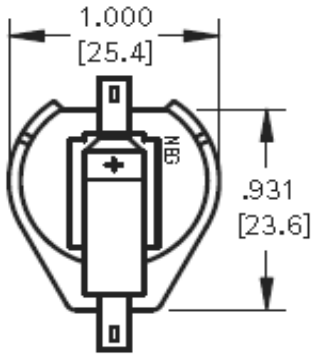

**PCB Layout (inch / mm)**



**Battery Coin Cell Holder  
 SMD**

Part No.: **B23127**


Customer:

|       |       |      |       |        |       |       |            |
|-------|-------|------|-------|--------|-------|-------|------------|
| DRW:  | Jason | CHKD | Jules | MATL:  | Wu    | DATE  | 04.11.2018 |
| APPD: | Join  |      |       | FINISH | Shieh | Sheet | 2 from 3   |



**Soldering Profile Curve**

**Classification Reflow Profile (JEDEC J-STD-020C)**

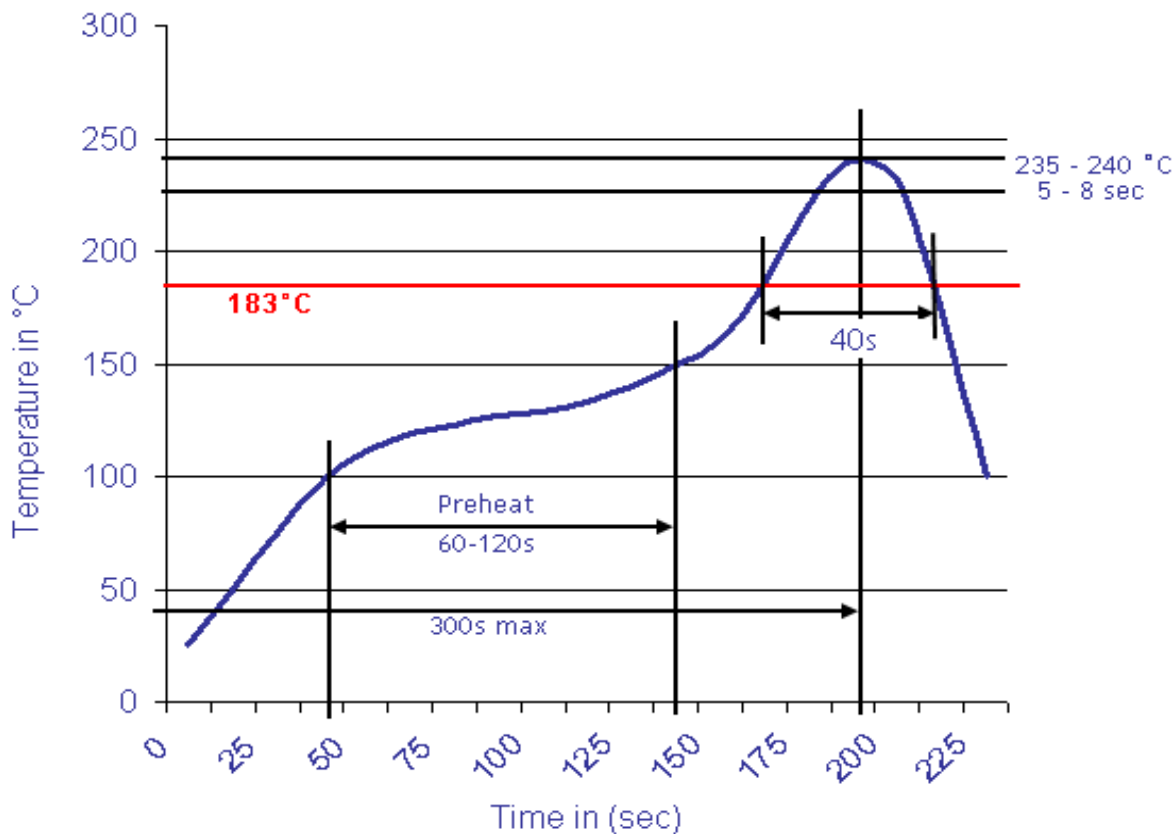

|   |               |
|---|---------------|
| <b>Battery Coin Cell Holder<br/>SMD</b> |               |
| Part No.:                               | <b>B23127</b> |
| Customer:                               |               |

|       |       |      |       |        |       |       |            |
|-------|-------|------|-------|--------|-------|-------|------------|
| DRW:  | Jason | CHKD | Jules | MATL:  | Wu    | DATE  | 04.11.2018 |
| APPD: | Join  |      |       | FINISH | Shieh | Sheet | 3 from 3   |