

**Technical Specification**

Insulator Material:	Nylon 46 UL94V-0
Contact Resistance:	30m Ohm max.
Insulator Resistance:	1000M Ohm max.
Temperature Rating:	.-50°C ~ 145°C
Contact Material:	Steel
Contact:	Gold Flash Plated
Dielectric Voltage:	750VAC
Durability:	50 Cycles min.
Application for:	Coin Cell
Battery Type: 1Cell	2450
Battery Type: 2Cell	Not available

**Dimension of Holder**

Inch					

mm					

**Ordering Information**

Serie	Contact Material	Contact Plating	ROHS	Packing		
-------	------------------	-----------------	------	---------	--	--

<b>B23129</b>	-	<b>PB</b>	<b>GF</b>	<b>R</b>	<b>BU</b>	
---------------	---	-----------	-----------	----------	-----------	--

<b>PB=</b> Phosphor Bronze		<b>N=</b> Non ROHS	<b>BU=</b> Bulk- Ware
	<b>GF=</b> Gold Flash	<b>R=</b> ROHS Conform	<b>TR=</b> Tape / Reel

**Battery Coin Cell Holder  
 SMD**



Part No.: **B23129**

Customer:


DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	04.11.2018
APPD:	Join			FINISH	Shieh	Sheet	1 from 3



**Technical Dimensions (inch / mm)**

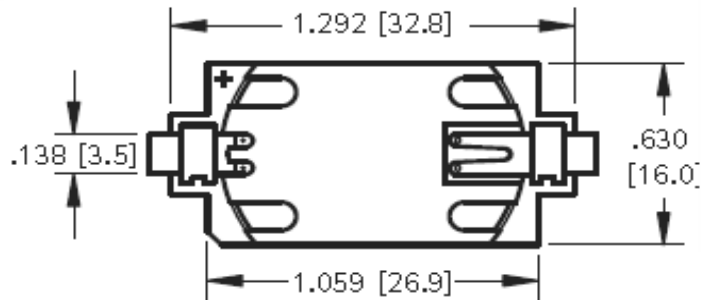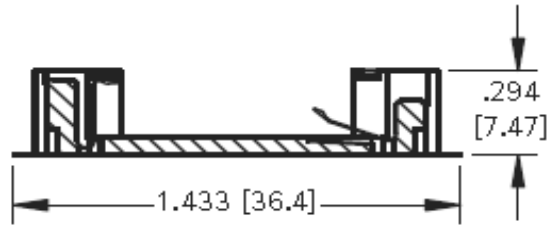

**PCB Layout (inch / mm)**

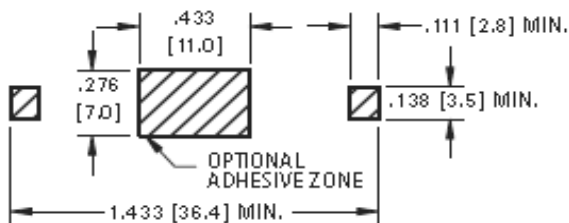


**Battery Coin Cell Holder  
 SMD**

Part No.: **B23129**


Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	04.11.2018
APPD:	Join			FINISH	Shieh	Sheet	2 from 3



**Soldering Profile Curve**

**Classification Reflow Profile (JEDEC J-STD-020C)**

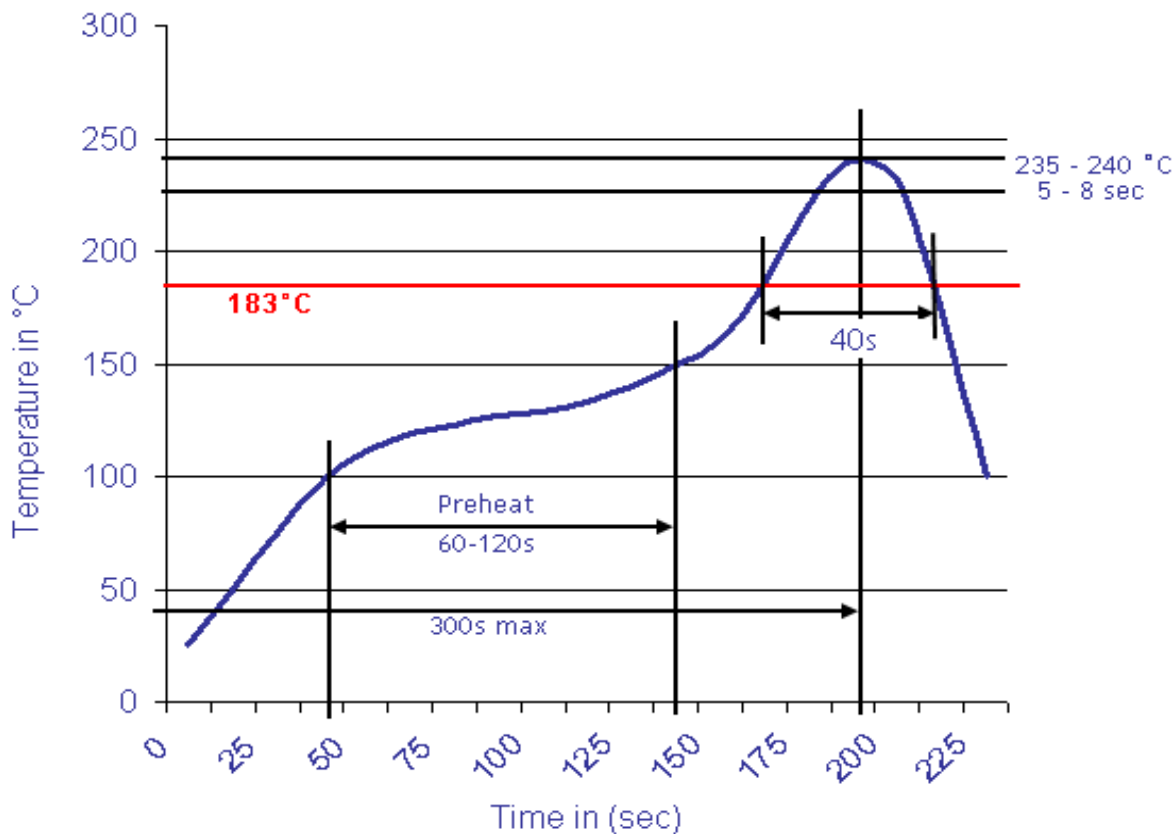

**Battery Coin Cell Holder  
 SMD**

Part No.: **B23129**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	04.11.2018
APPD:	Join			FINISH	Shieh	Sheet	3 from 3