

# EDCON-COMPONENTS



## Technical Informations


Material: Nylon 66  
 Flame Class: UL 94V-2 / V0  
 Color: Natural / Black  
 Temperature Range: . -40°C ~ +85°C

## Ordering Code table

Order Code	A	B	C	D	L
A01	4,0	4,0	M2	M2	5,0
A02	4,0	4,0	M2	M2	8,0
A03	4,0	4,0	M2	M2	10,0
A04	4,0	4,0	M2	M2	15,0
A05	4,0	5,0	M2	M2	5,0
A06	4,0	5,0	M2	M2	5,5
A07	4,0	5,0	M2	M2	8,0
A08	4,0	5,0	M2	M2	10,0
A09	4,0	5,0	M2	M2	14,0
A10	4,0	5,0	M2	M2	15,0
A11	4,0	5,0	M2	M2	21,0
A12	4,0	5,0	M2	M2	28,0
A13					
A14					
A15					
A16					
A17					
A18					
A19					
A20					
A21					
A22					
A23					
A24					
A25					
A26					
A27					

Order Code	A	B	C	D	L
A28					
A29					
A30					
A31					
A32					
A33					
A34					
A35					
A36					
A37					
A38					
A39					
A40					
A41					
A42					
A43					
A44					
A45					
A46					
A47					
A48					
A49					

## Dimension (mm)

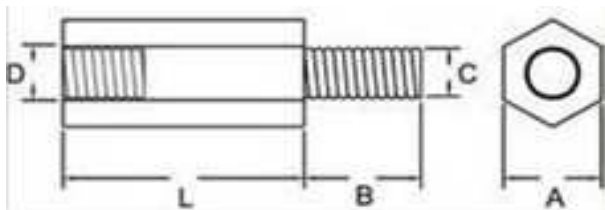

We can make custom specifications

**Metric Hexagonal Male/Female  
Nylon Threaded Spacer M2**

Part No.: **N14210**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	01.02.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	Customer:

# EDCON-COMPONENTS



## Ordering Informations

Serie	Order Code	Material	Color	ROHS	Packing					
<b>N14210</b>	<b>A01</b>	<b>NY</b>	<b>WH</b>	<b>R</b>	<b>BU</b>					

<b>A01</b> = Look orde table	<b>NY</b> = Nylon 66	<b>WH</b> = White	<b>R</b> = ROHS Conform	<b>BU</b> = Bulk-Ware			
		<b>BK</b> = Black	<b>N</b> = NON ROHS Conform	<b>IV</b> = Individual Packing			

<b>Metric Hexagonal Male/Female Nylon Threaded Spacer M2</b>	
Part No.:	<b>N14210</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	01.02.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2