


EDCON-COMPONENTS



Technical Informations

Material: Nylon 66
 Flame Class: UL 94V-2 / V0
 Color: Natural / Black
 Temperature Range: . -40°C ~ +85°C

Dimension (mm)

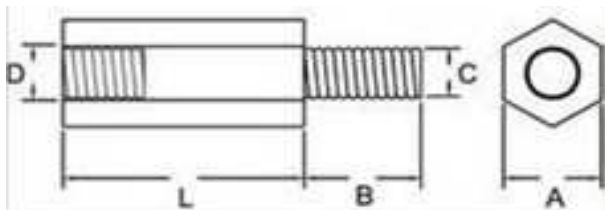

We can make custom specifications

Ordering Code table

Order Code	A	B	C	D	L
A01	7,0	6,5	M4	M4	6,0
A02	7,0	6,5	M4	M4	8,0
A03	7,0	6,5	M4	M4	10,0
A04	7,0	6,5	M4	M4	12,0
A05	7,0	6,5	M4	M4	14,0
A06	7,0	6,5	M4	M4	15,0
A07	7,0	6,5	M4	M4	16,0
A08	7,0	6,5	M4	M4	17,0
A09	7,0	6,5	M4	M4	19,0
A10	7,0	6,5	M4	M4	20,0
A11	7,0	6,5	M4	M4	25,0
A12	7,0	6,5	M4	M4	27,0
A13	7,0	6,5	M4	M4	30,0
A14	7,0	6,5	M4	M4	34,0
A15	7,0	6,5	M4	M4	35,0
A16	7,0	6,5	M4	M4	40,0
A17	7,0	6,5	M4	M4	45,5
A18	7,0	6,5	M4	M4	57,0
A19	6,0	6,5	M4	M4	13,0
A20	6,0	6,5	M4	M4	30,0
A21	6,0	6,5	M4	M4	55,0
A22	8,0	8,0	M4	M4	5,0
A23	8,0	8,0	M4	M4	6,0
A24	8,0	8,0	M4	M4	7,0
A25	8,0	8,0	M4	M4	8,0
A26	8,0	8,0	M4	M4	9,0
A27	8,0	8,0	M4	M4	10,0

Order Code	A	B	C	D	L
A28	8,0	8,0	M4	M4	11,0
A29	8,0	8,0	M4	M4	12,0
A30	8,0	8,0	M4	M4	13,0
A31	8,0	8,0	M4	M4	14,0
A32	8,0	8,0	M4	M4	15,0
A33	8,0	8,0	M4	M4	16,0
A34	8,0	8,0	M4	M4	17,0
A35	8,0	8,0	M4	M4	18,0
A36	8,0	8,0	M4	M4	19,0
A37	8,0	8,0	M4	M4	20,0
A38	8,0	8,0	M4	M4	21,0
A39	8,0	8,0	M4	M4	22,0
A40	8,0	8,0	M4	M4	23,0
A41	8,0	8,0	M4	M4	24,0
A42	8,0	8,0	M4	M4	25,0
A43	8,0	8,0	M4	M4	26,0
A44	8,0	8,0	M4	M4	27,0
A45	8,0	8,0	M4	M4	28,0
A46	8,0	8,0	M4	M4	29,0
A47	8,0	8,0	M4	M4	30,0
A48	8,0	8,0	M4	M4	31,0
A49	8,0	8,0	M4	M4	32,0

**Metric Hexagonal Male/Female
Nylon Threaded Spacer M4**

Part No.: **N14214**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	01.02.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

EDCON-COMPONENTS



Ordering Code table

Order Code	A	B	C	D	L
A50	8,0	8,0	M4	M4	33,0
A51	8,0	8,0	M4	M4	34,0
A52	8,0	8,0	M4	M4	35,0
A53	8,0	8,0	M4	M4	36,0
A54	8,0	8,0	M4	M4	37,0
A55	8,0	8,0	M4	M4	38,0
A56	8,0	8,0	M4	M4	39,0
A57	8,0	8,0	M4	M4	40,0
A58	8,0	8,0	M4	M4	41,0
A59	8,0	8,0	M4	M4	42,0
A60	8,0	8,0	M4	M4	43,0
A61	8,0	8,0	M4	M4	44,0
A62	8,0	8,0	M4	M4	45,0
A63	8,0	8,0	M4	M4	46,0
A64	8,0	8,0	M4	M4	47,0
A65	8,0	8,0	M4	M4	48,0
A66	8,0	8,0	M4	M4	49,0
A67	8,0	8,0	M4	M4	50,0
A68	8,0	8,0	M4	M4	51,0
A69	8,0	8,0	M4	M4	52,0
A70	8,0	8,0	M4	M4	53,0
A71	8,0	8,0	M4	M4	54,0
A72	8,0	8,0	M4	M4	55,0
A73	8,0	8,0	M4	M4	56,0
A74	8,0	8,0	M4	M4	57,0
A75	8,0	8,0	M4	M4	58,0
A76	8,0	8,0	M4	M4	59,0

Order Code	A	B	C	D	L
A77	8,0	8,0	M4	M4	60,0
A78					
A79					
A80					
A81					
A82					
A83					
A84					
A85					
A86					
A87					
A88					
A89					
A90					
A91					
A92					
A93					
A94					
A95					
A96					
A97					
A98					
A99					
B01					
B02					
B03					
B04					

Order Code	A	B	C	D	L
B05					
B06					
B07					
B08					
B09					
B10					
B11					
B12					
B13					
B14					
B15					
B16					
B17					
B18					
B19					
B20					
B21					
B22					
B23					
B24					
B25					
B26					
B27					

**Metric Hexagonal Male/Female
Nylon Threaded Spacer M4**

Part No.: **N14214**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	01.02.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	

EDCON-COMPONENTS



Ordering Informations

Serie	Order Code	Material	Color	ROHS	Packing					
N14214	A01	NY	WH	R	BU					

A01 = Look orde table	NY = Nylon 66	WH = White	R = ROHS Conform	BU = Bulk-Ware			
		BK = Black	N = NON ROHS Conform	IV = Individual Packing			

Metric Hexagonal Male/Female Nylon Threaded Spacer M4	
Part No.:	N14214
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	01.02.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3