



EDCON-COMPONENTS






SPECIFICATION:

Current Rating:	3 Ampere
Insulator Resistance:	5000 Megaohm min.
Dielectric Withstanding:	AC 1000V
Operating Temperature:	.-40°C to +105°C
Contact Material:	Copper, Alloy
Insulator Material:	Polyester, UL 94V-0
Standard:	P.B.T.
Contact Plating:	Tin, Gold or Selective Plated
Standard:	Gold Flash Overall

Drawing

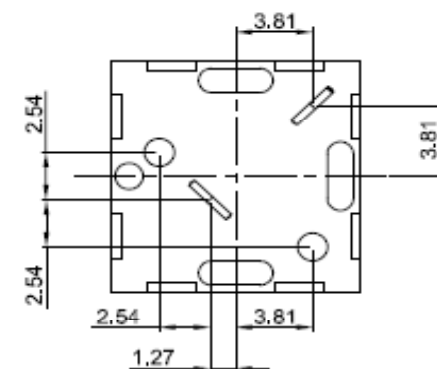

P.C.B Layout

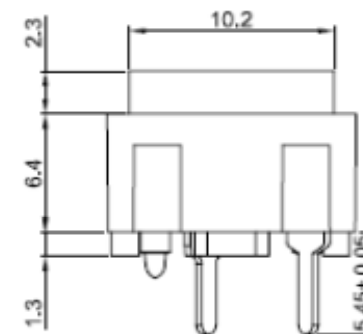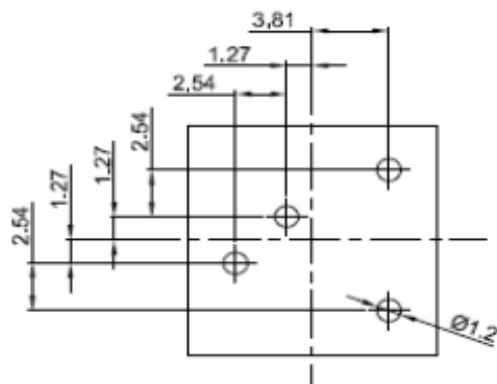

TACT SWITCH THT

Part No.: **Q11115**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.03.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	

EDCON-COMPONENTS



Ordering Informations

Serie	Total height w. Body	Cap Color	Operating Force	Switch Function	Electrical life	Fill with 0	ROHS	Packing		
Q11115	090	RD	000	B	503	X	R	BU		

090 = 9,0mm	RD = Red	101 = 100gr	A = ON- OFF with Look			N = non ROHS	BU = Bulk Ware
	GN = Green	151 = 150gr	B = OFF - (ON)	503 = 50000 cycles		R = ROHS conform	
	OR = Orange	201 = 200gr	C = ON - (OFF)				
	BL = Blue	251 = 250gr					
	WH = White	501 = 500gr					
	BK = Black						
	YE = Yellow						

TACT SWITCH THT

Part No.: **Q11115**

Customer:


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.03.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3

www.edcon-components.com


email: info@edcon-components.com



Soldering Profile for Lead Soldering

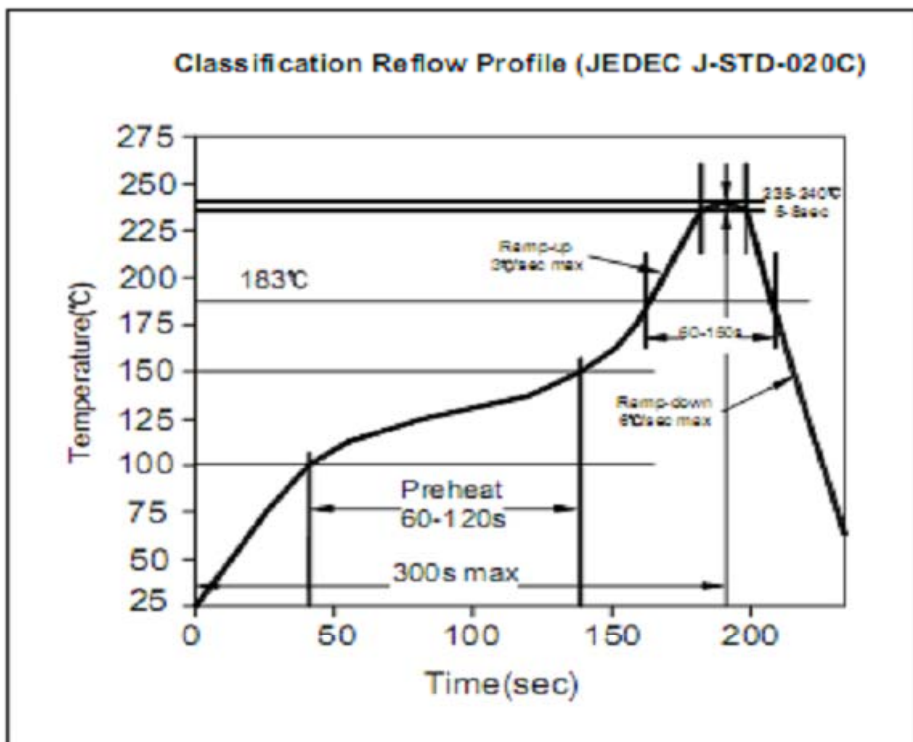

Soldering Profile for Lead Free Soldering

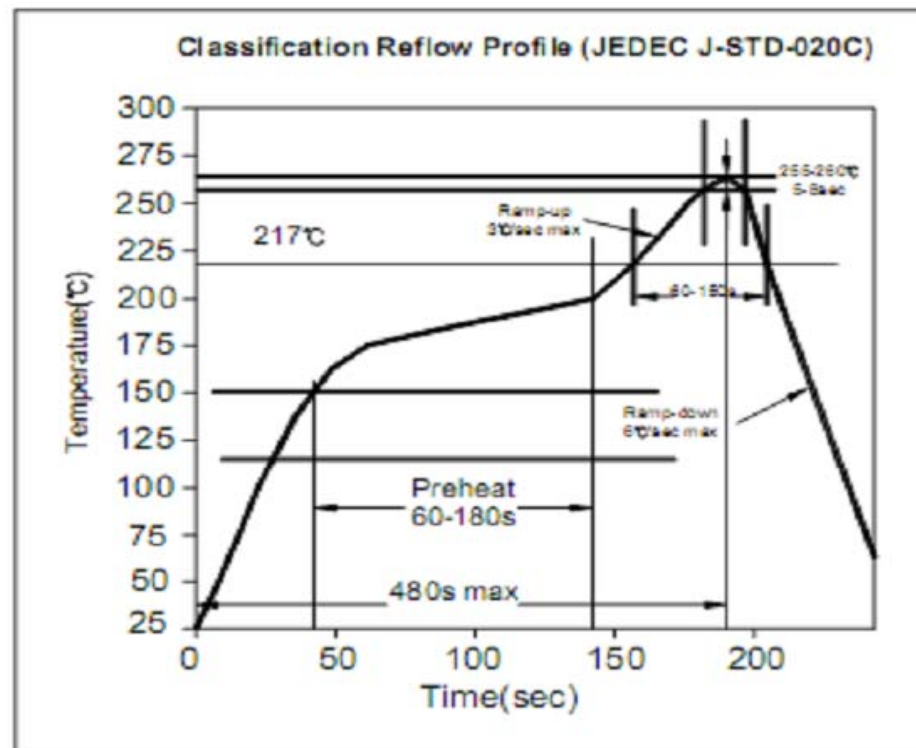

TACT SWITCH THT

Part No.: **Q11115**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.03.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	