


EDCON-COMPONENTS




SPECIFICATION:

Current Rating:	3 Ampere
Max. Voltage Rating:	250V AC/DC
Mim. Voltage Rating:	5V AC/DC 1mA
Insulator Resistance:	50 Megaohm min.
Dielectric Withstanding:	AC 2000V
Operating Temperature:	.-25°C to +55°C
Contact Material:	Copper, Alloy
Insulator Material:	Polyester, UL 94V-0
Standard:	P.B.T.
Contact Plating Standard:	Gold Flash Overall
Vibrations Resistance:	10 to 55Hz.
Protection Degree:	IP40
Ellectrical Lifetime:	100000 cyles
Mechanical Lifetime:	1000000 Cycles
Approval:	UL, CE


Drawing

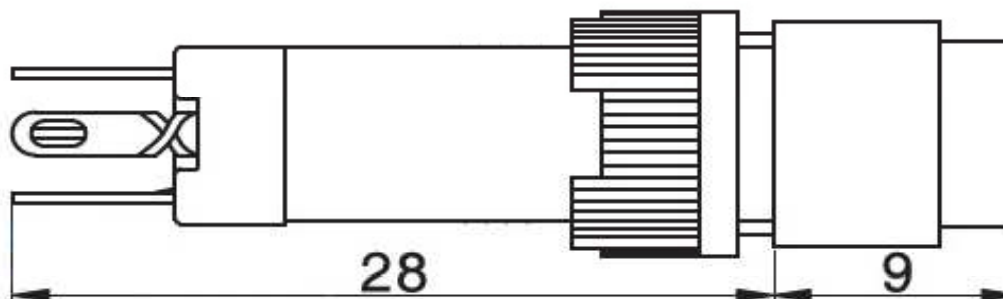

Hole Dimension (mm)

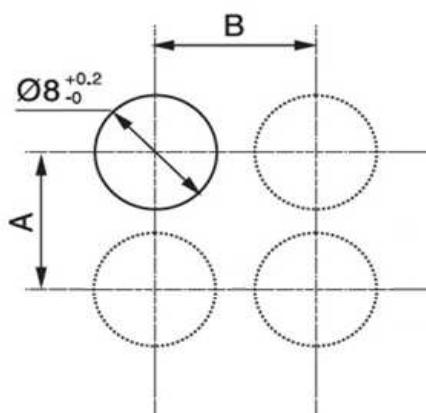

A	B	Form
≥10mm	≥10mm	Round
≥10mm	≥10mm	Square
≥10mm	≥14mm	Rectangle

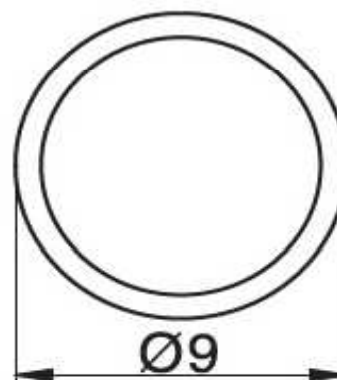

8mm Switch with Indicator (Round)

Part No.: **Q58042**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	06.05.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

Customer:
email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Knob Colour	Lamp Voltage	Contact Form	Special function	Special function	Special function	ROHS	Packing		
Q58042	RD	0	NO	A	N	N	R	BU		

RD= Red	0= without LED	NO = Form NO	A = Momentary function SPDT	N = No special function	N = No special function	N= Non ROHS	BU= Bulk Ware
GN= Green	F= 6,3VDC	NC = Form NC	L = Self-Locking function SPDT			R= ROHS conform	
YE= Yellow	E= 12VDC						
BL= Blue	D= 24VDC						
WH= White	A= 220VAC						
BK= Black							
OR= Orange							

8mm Switch with Indicator (Round)
Part No.: Q58042
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	06.05.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2