


# EDCON-COMPONENTS



## Technical Discription

Cap Type; Bajonett  
 Insulation Resistance: 100m  $\Omega$  Min 500VDC  
 Contact Resistance: 5m  $\Omega$  @ 1A DC  
 Dielectric Strength: AC 3000V for min. 60Sec.  
 Rated Current: 10A  
 Rated Voltage: 250VAC  
 Fuse Type/Size: 5x20mm  
 Protection Degree: IP40  
 Material: PBT

## Drawing

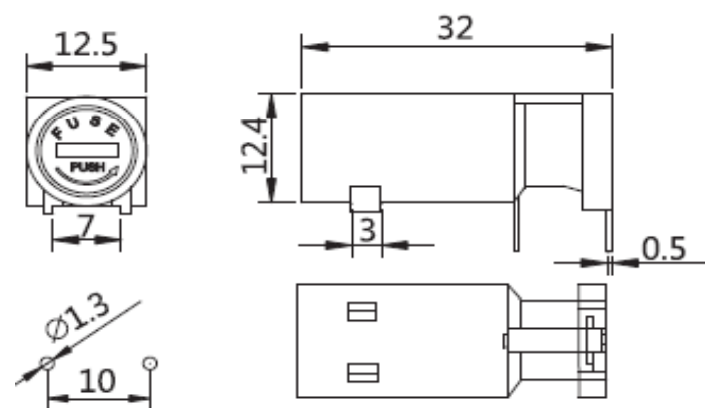

Approvals



**THT PCB Fuse Holder**

Part No.: **R53033**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.02.2019	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3		

# EDCON-COMPONENTS



## Ordering Informations

Serie	Body Colour	Spezial Function	ROHS	Packing						
-------	-------------	------------------	------	---------	--	--	--	--	--	--

<b>R53033</b>	-	<b>BK</b>	<b>0</b>	<b>R</b>	<b>BU</b>					
---------------	---	-----------	----------	----------	-----------	--	--	--	--	--

<b>BK= Black</b>	<b>0= No function</b>	<b>R= ROHS Conform</b>	<b>BU= Bulk-Ware</b>


<b>THT PCB Fuse Holder</b>	
Part No.:	<b>R53033</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.02.2019
APPD:	Schumi			FINISH	Jamy			Sheet No.	2 from 3



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

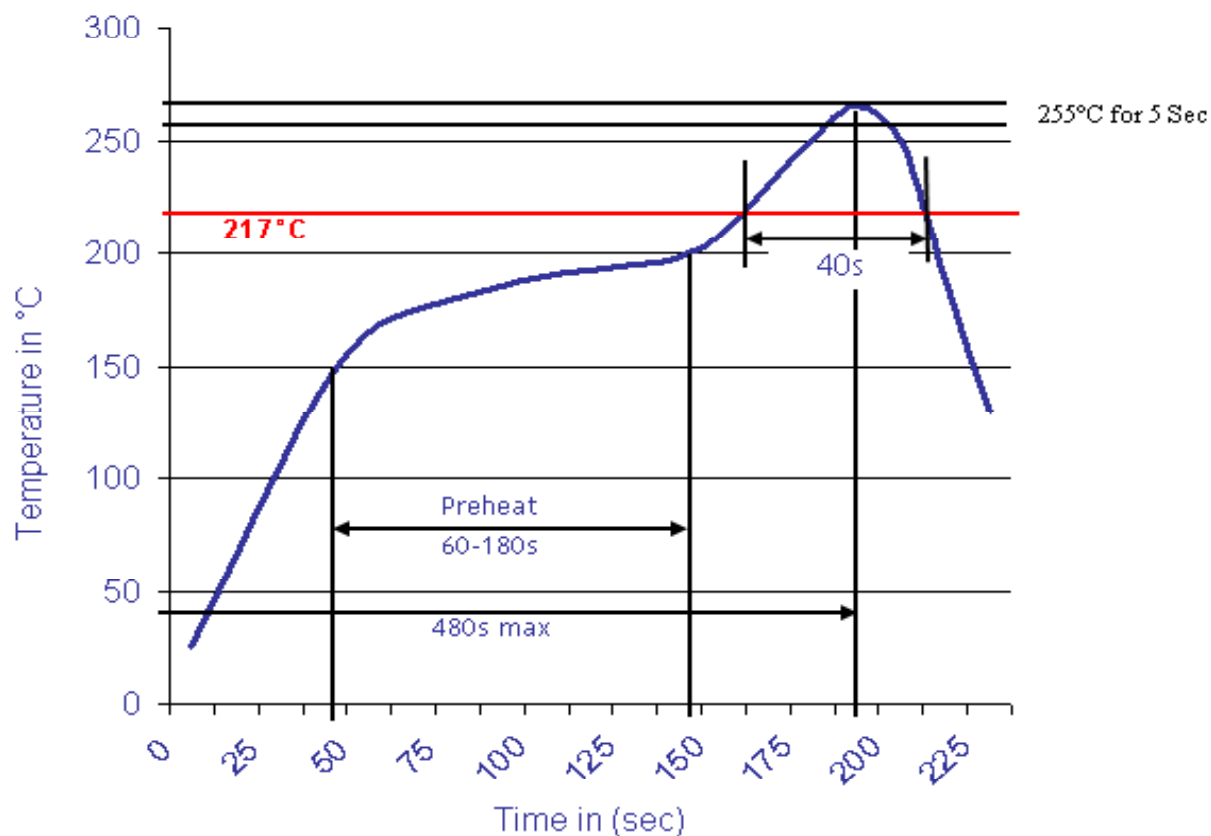

<b>THT PCB Fuse Holder</b>	
Part No.:	<b>R53033</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.02.2019
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	