

EDCON-COMPONENTS




Technical Discription

Type; Bajonett-Knob
 Insulation Resistance: 100M Ω Min 500VDC
 Contact Resistance: 5m Ω @ 1A DC
 Dielectric Strength: AC 1500V for min. 60Sec.
 Rated Current: 10A
 Rated Voltage: 250VAC
 Fuse Type/Size: 5x20mm
 Protection Degree: IP40
 Base: Phenolic
 Cap: PA +30%GF
 Terminal: Brass, tin plated


Approvals



Drawing (mm)

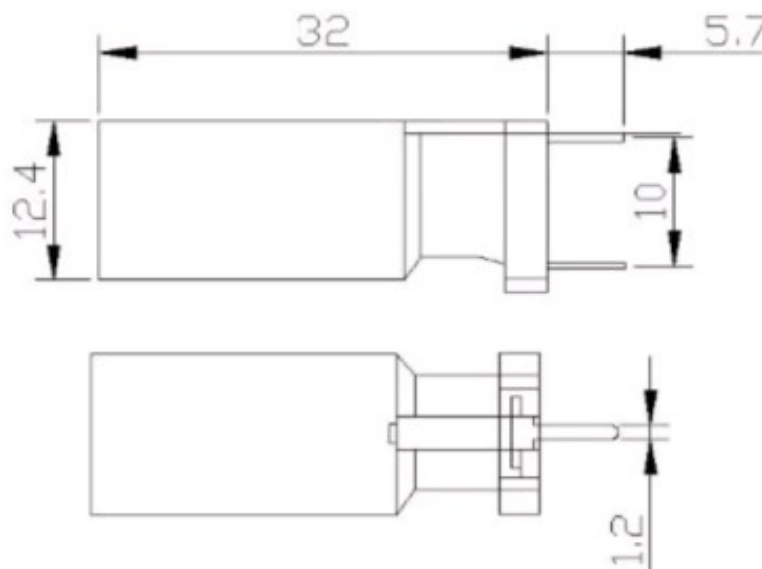

PCB Layout (mm)



THT PCB Fuse Holder

Part No.: **R53085**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.08.2024
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

Customer:

EDCON-COMPONENTS



Ordering Informations

Serie	Spezial Function	Spezial Function	ROHS	Packing						
R53085	0	0	R	BU						

0 = No function	0 = No function	R = ROHS Conform	BU = Bulk-Ware


THT PCB Fuse Holder	
Part No.:	R53085
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.08.2024
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

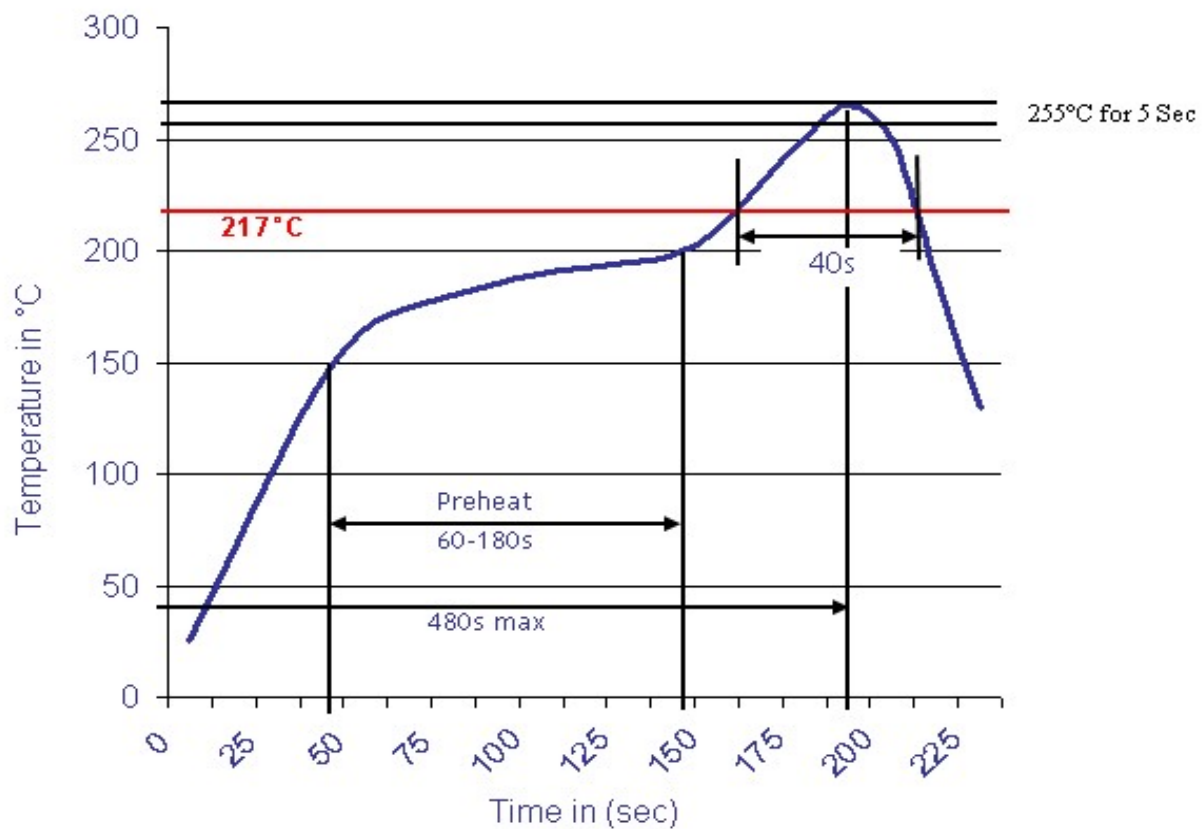

THT PCB Fuse Holder	
Part No.:	R53085
Customer:	

DRW:	Jason	CHKD:	Wilson	MATL:	Wilson	TOLERANCE:	Mason	DATE:	14.08.2024
APPD:	Schumi			FINISH:	Jamy		Sheet No.		3 from 3