

EDCON-COMPONENTS




Specifications

Voltage Rating: 250VAC
 Current Rating: 1A
 Operating Temperature: -40°C ~ +105°C
 Contact Resistance: 20mΩ min.
 Withstanding Voltage: 1000V AC
 Insulation Resistance: 1000MΩ min

Insulator Material: PBT, UL 94V-0
 Contact Material: Brass
 Contact Plating: Ni, /Au/Sn

Drawing (dimensions all into mm)

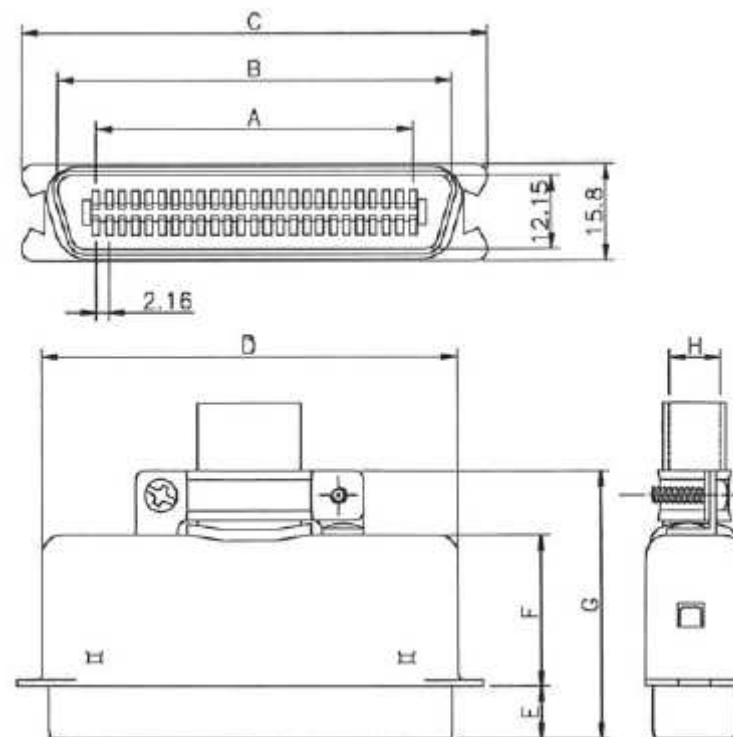

**Centronic Connector for
Cable assembly w. Hood**

Part No.: **T17004**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	18.07.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

EDCON-COMPONENTS



Dimension Information about Housing

Pos.	Female Dimension (mm)							
	A	B	C	D	E	F	G	H
36	36,72	49,30	61,80	53,20	7,90	22,60	40,50	11,50
50	51,84	64,40	77,00	68,10	8,60	24,90	44,30	12,50

Centronic Connector for Cable assembly w. Hood	
Part No.:	T17004
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	18.07.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	

EDCON-COMPONENTS



Ordering Informations

Serie	Number of Pos.	Version	Latches	Special function	ROHS Conform	Packing				
-------	----------------	---------	---------	------------------	--------------	---------	--	--	--	--

T17004	36	M	N	N	R	TY				
---------------	-----------	----------	----------	----------	----------	-----------	--	--	--	--

xx = Pos.	M= Male Connector	N= without latches	N= No special function	R= Rohs conform	TY= Tray Packing				
		Y= with latches		N= NON Rohs conf.	IV= Individual Packing				

Centronic Connector for Cable assembly w. Hood

Part No.: **T17004**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	18.07.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3

Customer: