


EDCON-COMPONENTS



Specifications

Voltage Rating:	250VAC max
Current Rating: Signal	3A
Operating Temperature:	.-55°C to + 105°C
Contact Resistance:	15m Ω max.
Withstanding Voltage:	1000V AC RMS for 1Minute
Insulation Resistance:	3000M Ω min at 500V DC.
Material Housing:	PBT & Glass Fill Rated UL94V-0
Contact Material:	Brass
Contact Plating Standard:	Gold Flash
Shell:	Steel
Rivet, Boradlovk:	Copper Alloy

PCB-Drawing (TOP-VIEW) (dimensions all into mm)

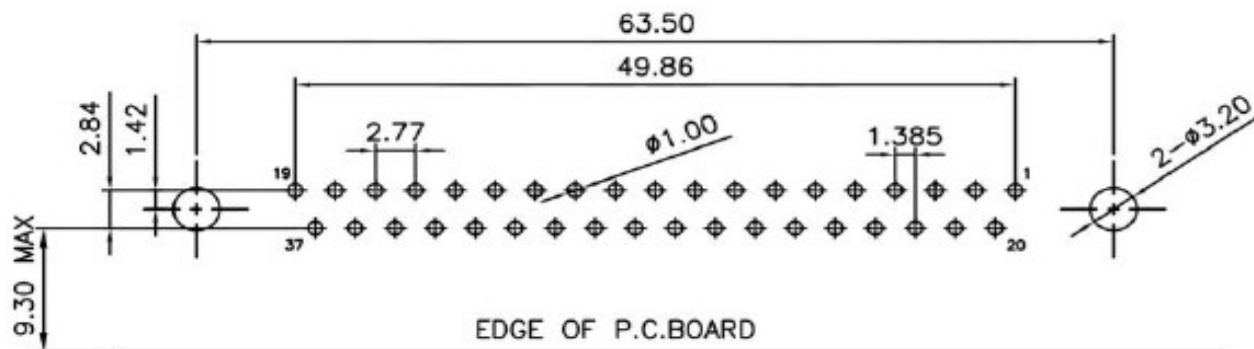

Tolerance Table (mm)				
Angle	0.	.0	.00	
±5°	±0,5	±0,3	±0,2	
DRW:	Jason	CHKD	Wilson	MATL:
APPD:	Schumi			FINISH
				Jamy
				TOLERANCE
				Mason
				DATE
				28.04.2026
				Sheet No.
				1 from 4





Female D-SUB-Connector Machined Contact w. Plastic Bracket / w.Nut / w.Boardlock	
Part No.:	T24D7057-
Customer:	

www.edcon-components.com

email: info@edcon-components.com



Dimension Information about Housing

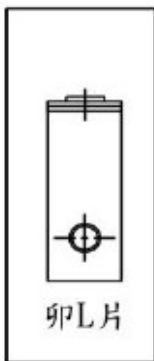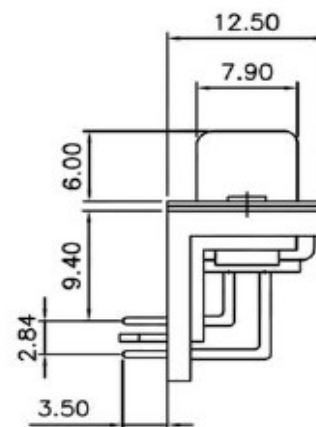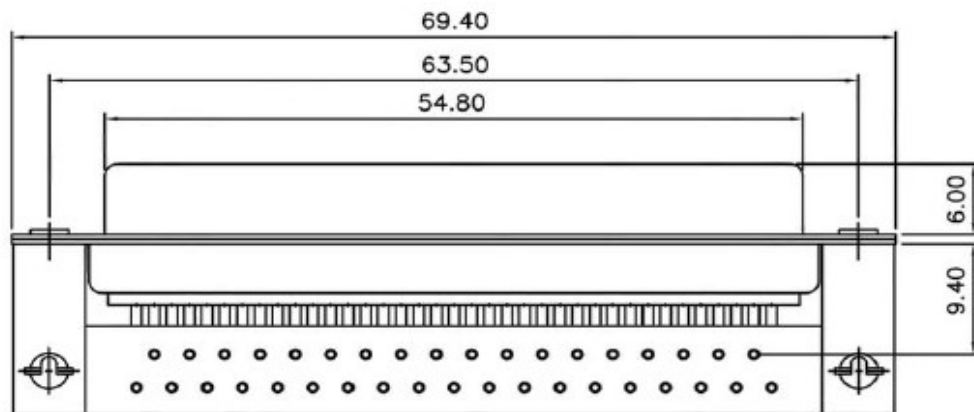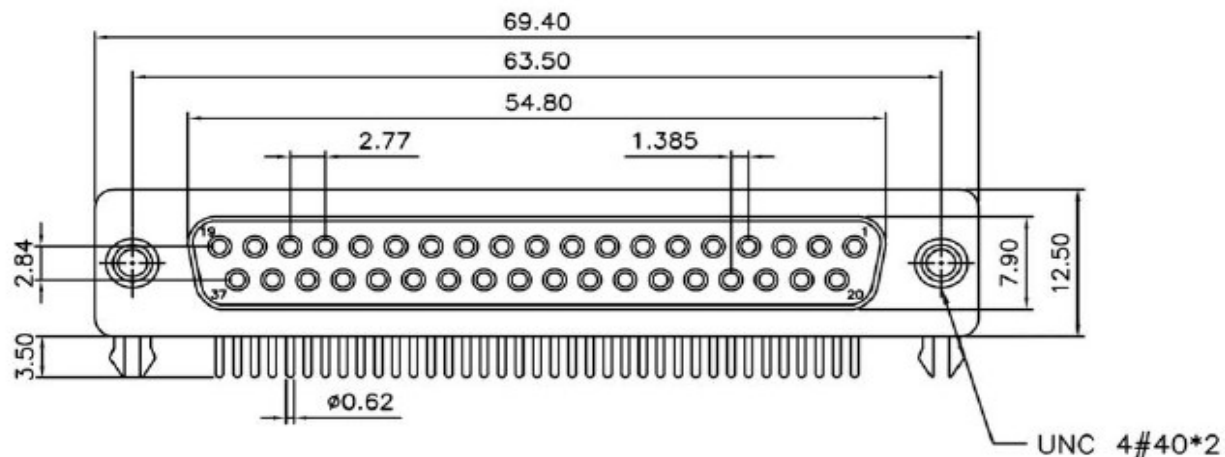

**Female D-SUB-Connector
Machined Contact w. Plastic
Bracket / w.Nut / w.Boardlock**
Part No.: **T24D7057-**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	28.04.2026
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 4	Customer:

EDCON-COMPONENTS



Ordering Informations

Serie	Type	Contact Form	Signal Contact Plating	Special function Nut	Body Colour	Special function	ROHS	Packing	
-------	------	--------------	------------------------	----------------------	-------------	------------------	------	---------	--

T24D7057-	37	F	GF	UN	WH	00	R	TY	
------------------	-----------	----------	-----------	-----------	-----------	-----------	----------	-----------	--

	F= Female	GF= Gold Flash	UN= mounted UNC-Nut	WH= White	00= No special function	R= ROHS Conform	TY= TRAY Packing	
37= Contacts		GA= 5µ AU		BK= Black		N= Non ROHS Conform		
		GB= 10µ AU						
		GC= 15µ AU						
		GD= 20µ AU						
		GE= 30µ AU						


**Female D-SUB-Connector
Machined Contact w. Plastic
Bracket / w.Nut / w.Boardlock**
Part No.: **T24D7057-**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	28.04.2026	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 4		



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

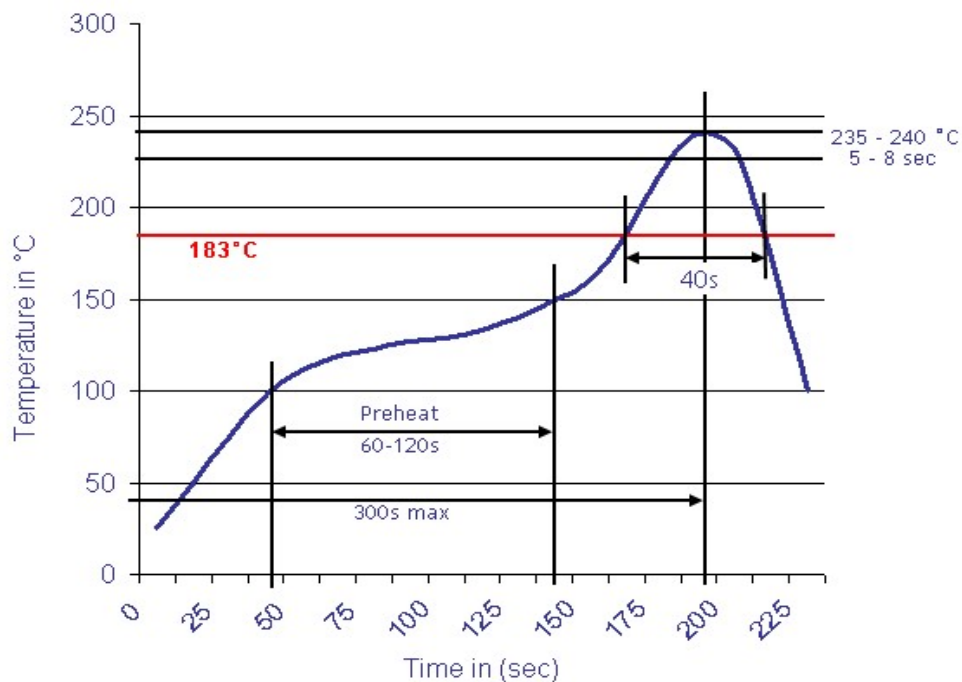

**Female D-SUB-Connector
Machined Contact w. Plastic
Bracket / w.Nut / w.Boardlock**
Part No.: **T24D7057-**

DRW:	Jason	CHKD:	Wilson	MATL:	Wilson	TOLERANCE:	Mason	DATE:	28.04.2026	Customer:
APPD:	Schumi			FINISH:	Jamy		Sheet No.	4 from 4		