


EDCON-COMPONENTS




Specifications

Insulation Material:	Polyvinyl Chloride (PVC)
Conductor:	#28 AWG /*0,127) Stranded Tinned Copper
UL-Style:	2651
Colour of Isolation:	Colored
Operating Temperature:	.-20°C to +105°C
Flammability Rating:	UL-VW-1
Voltage Rating:	300V
Electrical:	
Impedance	115Ω (Unbalanced)
Capacitance:	12,2pf/feet
Inductance:	14μH/Feet
Insulation Resistance:	1GΩ / M min.
Colour Range:	Brown,Red,Orange, Yellow,Green,Blue,Violet,Grey,White,Black, 10 Colour Repeat

Dimensions (mm)

Pos	A	B
9	12,63	11,43
10	13,90	12,70
14	18,98	17,78
15	20,25	19,05
16	21,52	20,32
20	26,60	25,40
24	31,68	30,48
25	32,95	31,75
26	34,22	33,02
30	39,30	38,10
34	44,38	43,18
36	46,92	45,72
37	48,19	46,99
40	52,00	50,80
44	57,08	55,88
50	64,70	63,50
60	77,40	76,20
64	82,48	81,28

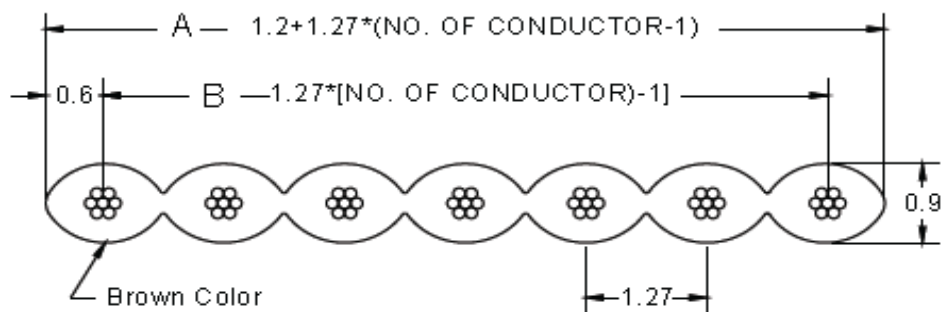


**Rainbow Flat Cable Pitch
1,27mm**

Part No.: **T29033**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	13.12.2018	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2		

EDCON-COMPONENTS



Ordering Informations

Serie	Number of Position	Colour of Cable	AWG Size	Special function	Special function	ROHS	Packing
T29033	xx	RA	28	00	00	R	R30

xx= Like Table	RA= Rainbow Colored	28= wire Size AWG28	00= No function	00= No function	R= ROHS Conform	R30= Length of Reel 30,5M
		26= wire Size AWG26			N= NON ROHS Conform	R76= Length of Reel 76,5M
						Rxx= Length of Reel

**Rainbow Flat Cable Pitch
1,27mm**

Part No.: **T29033**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	13.12.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2

Customer:

