

EDCON-COMPONENTS



Specifications


Insulation Material: Polyvinyl Chloride (PVC)
 Conductor: #26 AWG Stranded Tinned Copper

 Colour of Isolation: Gray
 Operating Temperature: -20°C to +105°C
 Flammability Rating: UL-VW-1
 Voltage Rating: 300V

 Electrical:
 Impedance: 120Ω (Unbalanced)
 Capacitance: 11,2pf/feet
 Inductance: 14μH/Feet
 Insulation Resistance: 1GΩ / M min.

Dimensions (mm)

Pos.	A	B
2	6,28	5,08
3	8,82	7,62
4	11,36	10,16
5	13,90	12,70
6	16,44	15,24
7	18,98	17,78
8	21,52	20,32
9	24,06	22,86
10	26,60	25,40
11	29,14	27,94
12	31,68	30,48
13	34,22	33,02
14	36,76	35,56
15	39,30	38,10
16	41,84	40,64
17	44,38	43,18
18	46,92	45,72
19	49,46	48,26
20	52,00	50,80
21	54,54	53,34
22	57,08	55,88
23	59,62	58,42
24	62,16	60,96

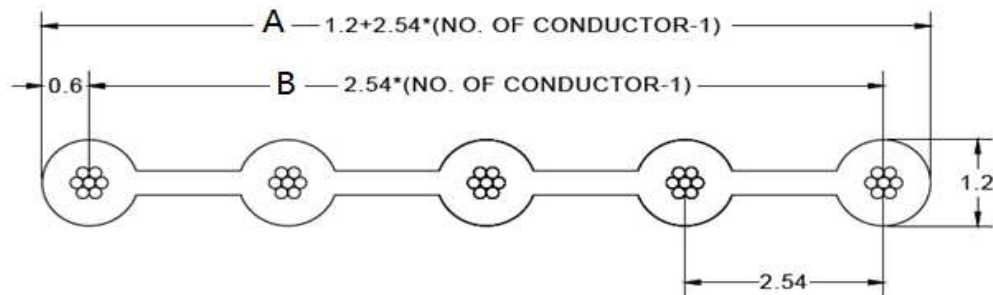

Flat Ribbon Cable Pitch 2,54 AWG26	
Part No.:	T29035
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	24.03.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

EDCON-COMPONENTS



Ordering Informations

Serie	Nmber of Position	Colour of Cable	AWG Size	Special function	Special function	ROHS	Packing
T29035	xx	GY	26	00	00	R	Rxx

xx= Like Table	GY= Gray	24= wire Size AWG26	00= No function	00= No function	R= ROHS Conform	Rxx= Length of cable per Reel
		26= wire Size AWG26			N= NON ROHS Conform	
		28= wire Size AWG26				

Flat Ribbon Cable Pitch 2,54 AWG26
Part No.: T29035
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	24.03.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2