






# EDCON-COMPONENTS



## Technical Discription

**Material:**  
 Insulator: PBT, Glass reinforced, rated UL94V-0  
 Contact: Phosphor Bronze  
**Electrical:**  
 Current Rating: 1A  
 Contact Resistance: 30mΩ max.  
 Insul. Resistance: 3000MΩ min.  
 Dielectric Withst. Voltage: 500VAC for 1 Minute  
 Operating Temperature: -40°C to + 105°C  
 Terminated with: 2,54mm pitch Flat ribbon Cable

## Drawing (mm)

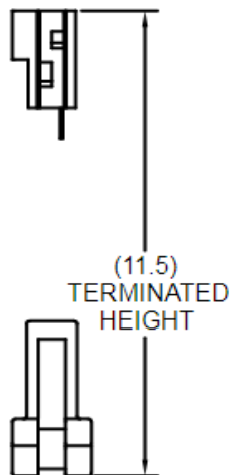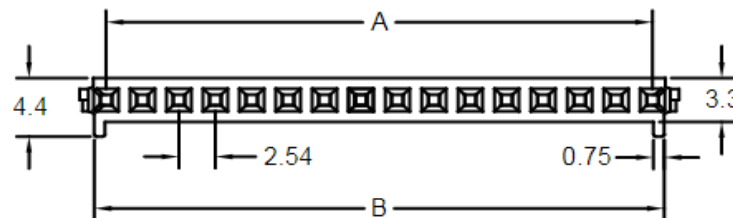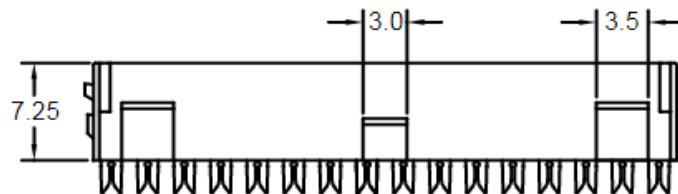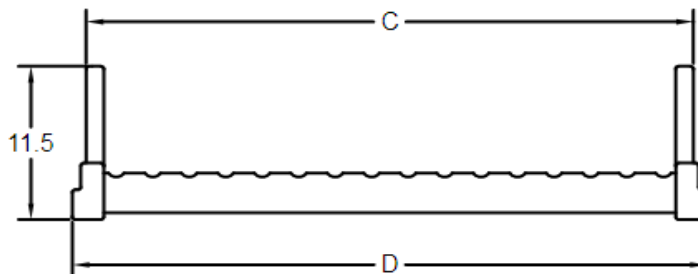

Pos.	A	B	C	D
4	7,62	9,14	11,80	13,54
5	10,16	11,68	14,34	16,08
6	12,70	14,22	16,88	18,62
7	15,24	16,76	19,42	21,16
8	17,78	19,30	21,96	23,70
9	20,32	21,84	24,50	26,24
10	22,86	24,38	27,04	28,78
11	25,40	26,92	29,58	31,32
12	27,94	29,46	32,12	33,86
13	30,48	32,00	34,66	36,40
14	33,02	34,54	37,20	38,94
15	35,56	37,08	39,74	41,48
16	38,10	39,62	42,28	44,02
17	40,64	42,16	44,82	46,56
18	43,18	44,70	47,36	49,10
19	45,72	47,24	49,90	51,64
20	48,26	49,78	52,44	54,18
21	50,80	52,32	54,98	56,72
22	53,34	54,86	57,52	59,26
23	55,88	57,40	60,06	61,80
24	58,42	59,94	62,60	64,34


**IDC-Female Header Single Row  
Pitch 2,54mm**

Part No.: **TA33A1010**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	23.08.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

# EDCON-COMPONENTS



## Ordering Informations

Serie	Number of Position	Contact Plating	Body Colour	Contact Material	ROHS	Packing				
TA33A1010	02	TN	BK	PB	R	BU				

04 ~ 24Pos.	TN= Tin Plated	BK= Black	PB= Phosphor Bronze	R= ROHS Conform	BU= Bulk-Ware
	GF= Gold Flash				
	SF= Selektive Gold Flash				TY= Tray
	GA= 5µ inch Gold				
	GB= 10µ inch Gold				
	GC= 15µ inch Gold				
	GD= 30µ inch Gold				

<b>IDC-Female Header Single Row Pitch 2,54mm</b>
Part No.: <b>TA33A1010</b>
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	23.08.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2