

EDCON-COMPONENTS








Technical Discription

Drawing (mm)

Material:
 Insulator: PC, Rated UL94V-0
 Contact: Phosphor Bronze

Electrical:
 Current Rating: 2A
 Contact Resistance: 30mΩ max.
 Insul. Resistance: 3000MΩ min.
 Dielectric Withst. Voltage: 500VAC for 1 Minute
 Operating Temperature: -40°C to + 105°C
 Terminated with: 2,5mm pitch Flat ribbon Cable

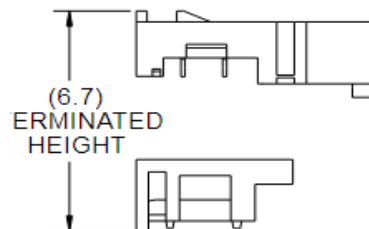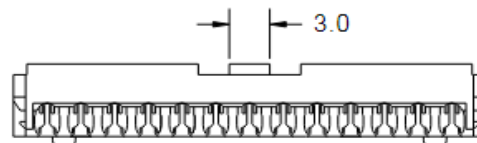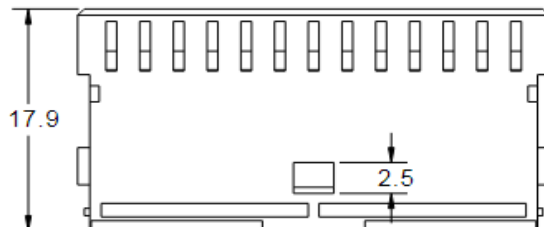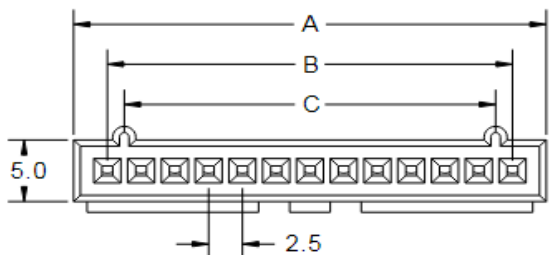

Pos.	A	B	C
2	7,5	2,5	--
3	10,0	5,0	2,5
4	12,5	7,5	5,0
5	15,0	10,0	7,5
6	17,5	12,5	10,0
7	20,0	15,0	12,5
8	22,5	17,5	15,0
9	25,0	20,0	17,5
10	27,5	22,5	20,0
11	30,0	25,0	22,5
12	32,5	27,5	25,0
13	35,0	30,0	27,5
14	37,5	32,5	30,0
15	40,0	35,0	32,5
16	42,5	37,5	35,0
17	45,0	40,0	37,5
18	47,5	42,5	40,0
19	50,0	45,0	42,5
20	52,5	47,5	45,0

IDC-Female Header Single Row Pitch 2,54mm	
Part No.:	TA33A1012
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	23.08.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

EDCON-COMPONENTS



Ordering Informations

Serie	Number of Position	Contact Plating	Body Colour	Contact Material	ROHS	Packing				
TA33A1012	02	TN	BK	PB	R	BU				

02 ~ 20Pos.	TN= Tin Plated	BK= Black	PB= Phosphor Bronze	R= ROHS Conform	BU= Bulk-Ware
	GF= Gold Flash				
	SF= Selektive Gold Flash				
	GA= 5µ inch Gold				
	GB= 10µ inch Gold				
	GC= 15µ inch Gold				
	GD= 30µ inch Gold				

IDC-Female Header Single Row Pitch 2,54mm
Part No.: TA33A1012
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	23.08.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2