






EDCON-COMPONENTS



Specifications

Current Rating:	3,0 Amp.
Insulation Resistance:	1000M Ohm min.
Contact Resistance:	20milli Ohm max.
Dielectric Voltage:	1000V AC for one minute
Operating Temperature:	-40°C ~ to +105°C
Insulator Material:	PBT+30% G.F.(UL94V-0)
Contact Pin:	Brass
Contact Plating:	Gold over Ni.

Drawing

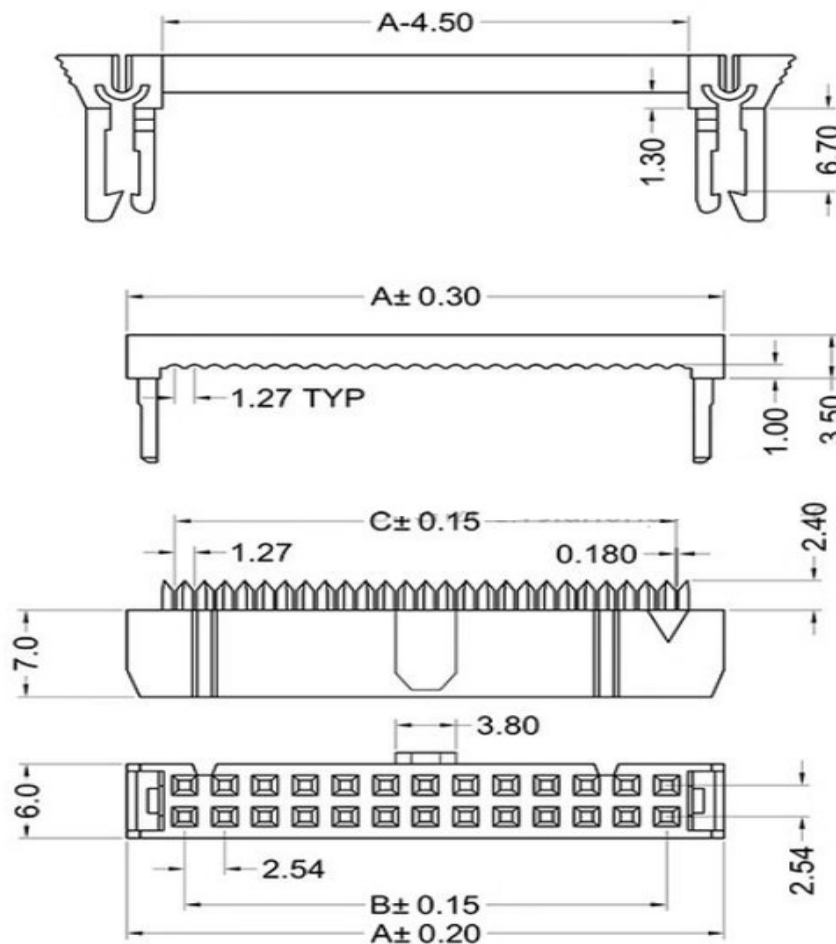

**IDC CONNECTOR Pitch
2,54x2,54mm**

Part No.: **T33A1015 -**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	05.07.2026
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	

Customer:

www.edcon-components.com

email: info@edcon-components.com

Copyright by S.Tiede

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	Contact Plating	Material	Color of Body	Special Function	ROHS	Packing			
T33A1015 -	XX	S0	PB	BK	Y	R	BU			

XX = 6, 8, 10,12,14,16, 18, 20, 24, 26, 30, 34, 40, 50	G0 = Gold Flash	PB = PBT +30% GF f. ROHS	BK = Black	Y = w. Strain relief	N =NO ROHS conform	BU = Bulk Ware
	T0 = Tin plated					
	GA = 3µ Gold Plating				R =ROHS conform	TU = Tube Packing
	GB = 5µ Gold Plating					
	GC = 10µ Gold Plating					
	GD = 30µ Gold Plating					
	S0 = Selectiv Plating Gold Flash / Tin					
	SD = Selectiv Tin/ 5µGold					
	SD = Selectiv Tin/ 10µ Gold Flash					
	SD = Selectiv Tin/ 20µ Gold	SD = Selectiv Tin/ 30µ Gold				

IDC CONNECTOR Pitch 2,54x2,54mm
Part No.: T33A1015 -
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	05.07.2026
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2	