




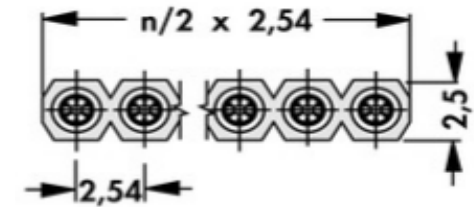


Specifications

Current Rating:	3 Ampere
Insulator Resistance:	5000 Megaohm min.
Contact Resistance:	10m Ohm max.
Dielectric Withstanding:	AC 1000V RMS
Operating Temperature:	.-40°C to +105°C
Contact Material:	Brass
Insulator Material:	PPS UL94V-.0
Standard: Contact:	Gold Flash Overall
Contact Plating:	Tin, Gold or Selective Plated
Standard: Solder Pin:	tin plated
for Mating Connector:	0,64x0,64mm

Drawing

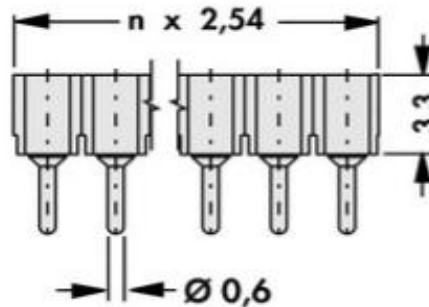

PCB Layout

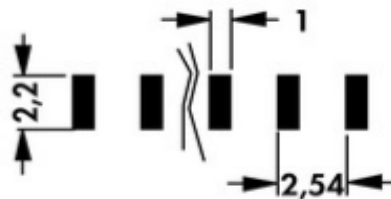

SMT Machined Contact Female Header Pitch 2,54mm

Part No.: **T40226 -**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	26.07.2023
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	



Ordering Informations

Serie	No. of Pos.	Solder Pin Plating	Inner Clip Plating	Material	Special Function	Special Function	ROHS	Packing		
-------	-------------	--------------------	--------------------	----------	------------------	------------------	------	---------	--	--

T40226 -	xx	A	3	PP	N	N	R	TR		
-----------------	-----------	----------	----------	-----------	----------	----------	----------	-----------	--	--

XX= 02-40Pin	A= Tin 150μ Standard)	1= Tin 150μ Standard)	PP=PPS	N= No	N= No	N=NO ROHS conform	BU= Bulk
	B= Tin 200μ	2= Tin 200μ Standard)					TU= Tube
	C= Gold flash	3= GF Standard)				R=ROHS conform	
	D= 2μ AU Gold flash	4= 2μ AU Gold flash					
	E= 3μ AU Gold flash	5= 3μ AU Gold flash					TR= Tape Reel Packing w. Mylar Foil
	F= 10μ AU Gold flash	6= 10μ AU Gold flash					
	G= 15μ AU Gold flash	7= 15μ AU Gold flash					
	G= Special Au plated	8= Special AU Plated					

**SMT Machined Contact Female
 Header Pitch 2,54mm**

Part No.: **T40226 -**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	26.07.2023
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2	

Customer: