



DATA SHEET

115Pos. SMD-PGA Socket for PCB Mounting

Serie: T47028

**115Pos. SMD-PGA Socket for
PCB Mounting**

Serie No.: **T47028**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	01.12.2023
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 4



EDCON-COMPONENTS



Technical Description

Insulator:	Black FR4 Laminate, .062 (1.57) Thick Ref.
Terminal:	Brass , per ASTM-B16
Contact:	BeCu, per ASTM-B194
Forces:	Insertion: 1.6 oz. max.
	Withdravel: 0,5 oz min
Plating:	Terminal: Outside Tin Plated
	Contact Clip Gold 10m inches min.

TOP VIEW (OPEN CENTER)

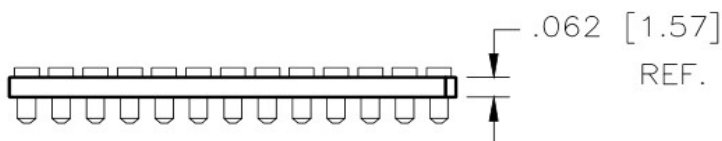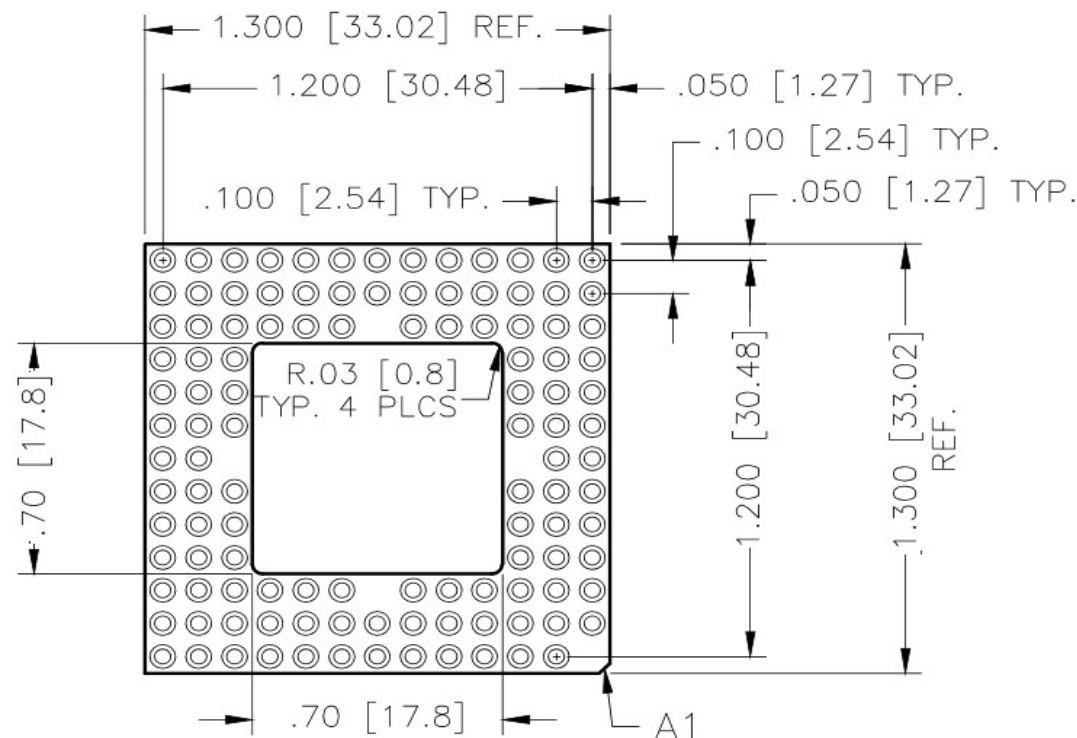

**115Pos. SMD-PGA Socket for
PCB Mounting**


Part No.: **T47028**

DRW:	Jason	CHKD:	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	01.12.2023	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 4	

www.edcon-components.com

email: info@edcon-components.com

Copyright by S.Tiede

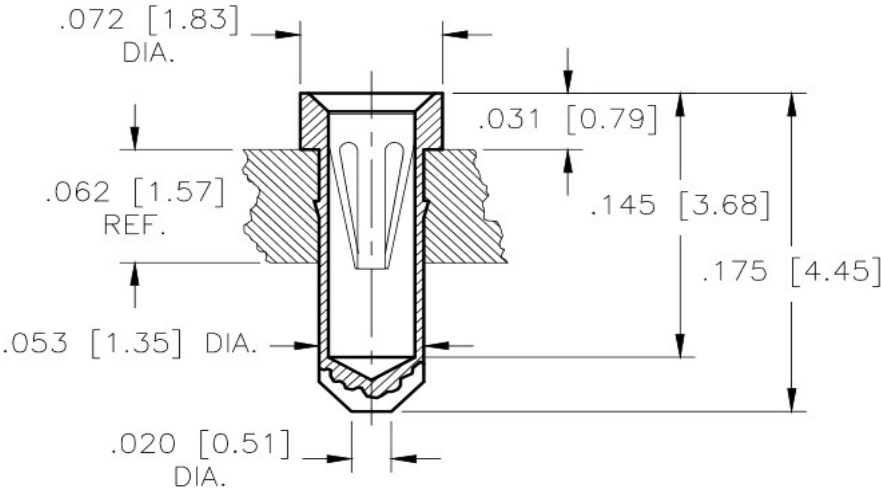

**115Pos. SMD-PGA Socket for
PCB Mounting**

Part No.: **T47028**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	01.12.2023
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

Customer:

EDCON-COMPONENTS



Ordering Informations

Customer	No. of Pin	Solder Pin Plating	Inner Clip Plating	ROHS	Packing Code					
T47028	115	A	3	R	TY					

Number of Pos.	A= Tin 150μ (Standard)	1= Tin 150μ	R= ROHS Conform	TY= Tray Package
	B= Tin 200μ (Standard)	2= Tin 200μ	N= NON ROHS Conform	IV= Individual Package
	C= GF (Gold Flash)	3= GF Gold Flash Standard		
	D= Gold 2μ"	4= Gold 2μ"		
	E= Gold 3μ"	5= Gold 3μ"		
	F= Gold 10μ"	6= Gold 10μ"		
	G= Gold 15μ"	7= Gold 15μ"		
	H= Special	8= Special		

115Pos. SMD-PGA Socket for PCB Mounting

Part No.: **T47028**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	01.12.2023
APPD:	Schumi			FINISH	Jamy		Sheet No.		4 from 4

Customer: