


EDCON-COMPONENTS





Technical Description

Voltage Rating: 150 VAC / DC
Curent Rating: 5A AC/DC
Withstanding Voltage: 1500VAC/ minute
Insulation Resistance: 1000M Ω min
Temperature Range: - 25°C ~ + 85°C
Contact Resistance: 20m Ω max.



Housing Material: Nylon 66, UL94V-2

Drawing

2P

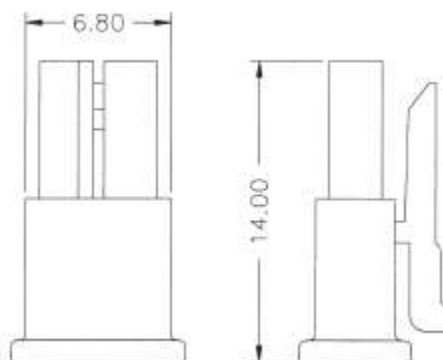

3P~12P

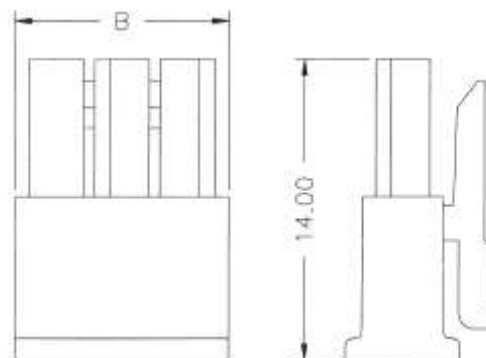


**Mikro Fit Male Connector
Single Row**

Part No.: **T48001**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.10.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	Customer:

EDCON-COMPONENTS



Dimensions

Number of Positions


Pos.	A	B
2P	3,00	6,80
3P	6,00	9,80
4P	9,00	12,80
5P	12,00	15,80
6P	15,00	18,80
7P	18,00	21,80
8P	21,00	24,80
9P	24,00	27,80
10P	27,00	30,80
11P	30,00	33,80
12P	33,00	36,80

**Mikro Fit Male Connector
Single Row**

Part No.: **T48001**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.10.2015	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3		

EDCON-COMPONENTS



Ordering Informations

Serie	No. Of Position	Special function	Color of Body	ROHS	Packing					
-------	-----------------	------------------	---------------	------	---------	--	--	--	--	--

T48001	XX	N	BK	R	BU					
---------------	-----------	----------	-----------	----------	-----------	--	--	--	--	--

XX= xxPos. look table	N= No function	BK= Black	R= ROHS Conform	BU= Bulk- Ware
				IV= Individual Packing

**Mikro Fit Male Connector
Single Row**

Part No.: **T48001**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.10.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3

Customer: