


EDCON-COMPONENTS






Technical Discription

Voltage Rating: 150 VAC / DC
Curent Rating: 5A AC/DC
Withstanding Voltage: 1500VAC/ minute
Insulation Resistance: 1000M Ω min
Temperature Range: - 25°C ~ + 85°C
Contact Resistance: 20m Ω max.

Housing Material: Nylon 66, UL94V-2

Drawing

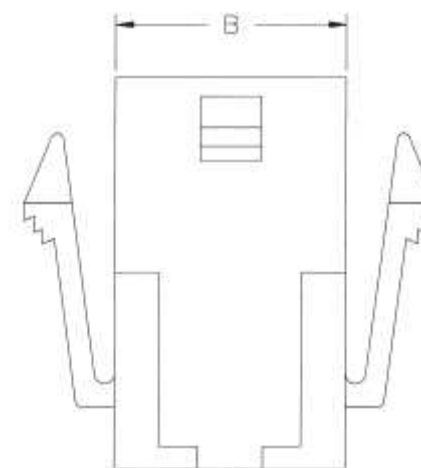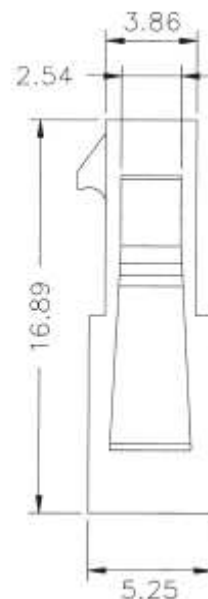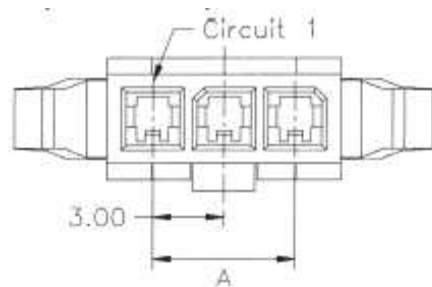


**Mikro Fit Male Connector
Single Row**

Part No.: **T48002**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.10.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

Customer:

EDCON-COMPONENTS



Dimensions

Number of Positions


Pos.	A	B
2P	3,00	6,85
3P	6,00	9,85
4P	9,00	12,85
5P	12,00	15,85
6P	15,00	18,85
7P	18,00	21,85
8P	21,00	24,85
9P	24,00	27,85
10P	27,00	30,85
11P	30,00	33,85
12P	33,00	36,85

**Mikro Fit Male Connector
Single Row**

Part No.: **T48002**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.10.2015	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3		

EDCON-COMPONENTS



Ordering Informations

Serie	No. Of Position	Special function	Color of Body	ROHS	Packing					
-------	-----------------	------------------	---------------	------	---------	--	--	--	--	--

T48002	XX	N	BK	R	BU					
---------------	-----------	----------	-----------	----------	-----------	--	--	--	--	--

XX= xxPos. look table	N= No function	BK= Black	R= ROHS Conform	BU= Bulk- Ware
				IV= Individual Packing

**Mikro Fit Male Connector
Single Row**

Part No.: **T48002**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.10.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3

Customer: