


EDCON-COMPONENTS






Specifications


Voltage Rating:	250 V AC/DC
Current Rating:	1A AC/DC
Operating Temperature:	-25°C to +85°C
Contact Resistance:	20 mΩ
Withstanding Voltage:	500 V AC/Minute
Insulation Resistance:	500MΩ min.
Material Housing:	LCP / UL94V-0
Pin-Material:	Phosphor / Tin-plated
Pantone Color:	7528C



Drawing (dimensions all into mm)

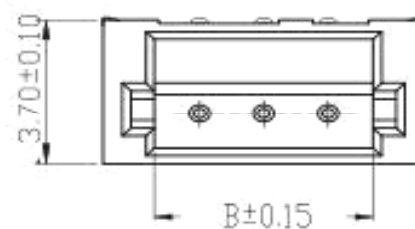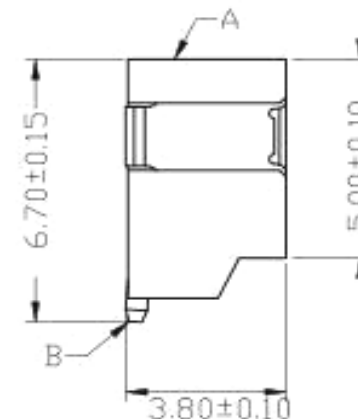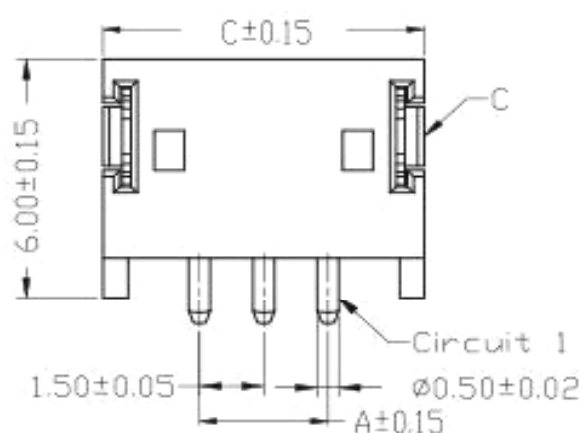

P.C.B. Layout

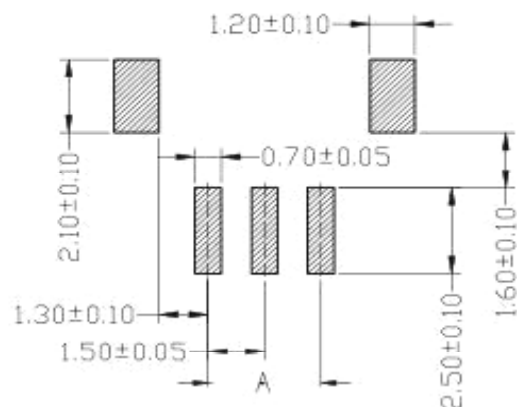


SMT Wafer Serie T68Sxxxx Pitch
1,50mm (Side-Entry)

Part No.: **T68K009 -**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.05.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

EDCON-COMPONENTS



Ordering Informations


Serie	Number of Pos.	Special function	Color of Body	Packing						
-------	----------------	------------------	---------------	---------	--	--	--	--	--	--

T68K009 -	02	X	GY	BU						
------------------	-----------	----------	-----------	-----------	--	--	--	--	--	--

xx = Pos.	X= No function	GY= Gray	BU= Bulk-ware							
			TR= Tape / Reel Packing							


SMT Wafer Serie T68Sxxxx Pitch 1,50mm (Side-Entry)
Part No.: T68K009 -
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.05.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

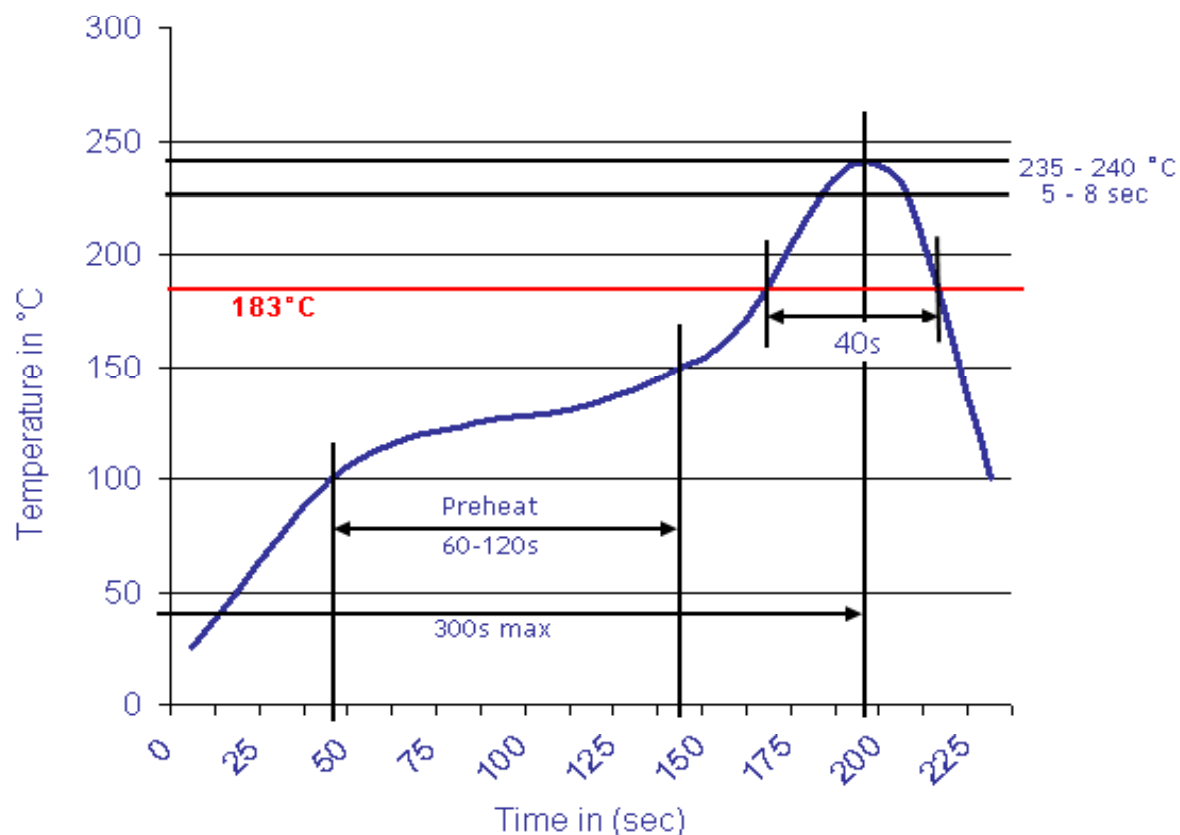

SMT Wafer Serie T68Sxxxx Pitch
1,50mm (Side-Entry)

Part No.: **T68K009 -**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.05.2021	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4		