


EDCON-COMPONENTS







Technical Description

Current Rating: 2,0A
 Voltage Rating: 250V AC/DC
 Withstanding Voltage: 1000VAC/ DC
 Insulation Resistance: 1000MΩ Min
 Operating Temperature: -25°C to + 85°C
 Contact Resistance: 20mΩ max.

 Insulator Material: PBT + 30%G.F UL94V-0

Drawing

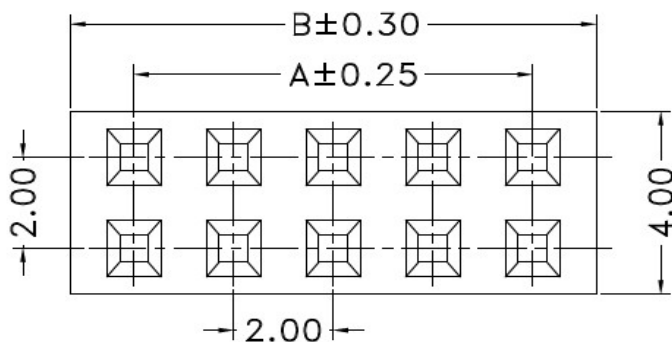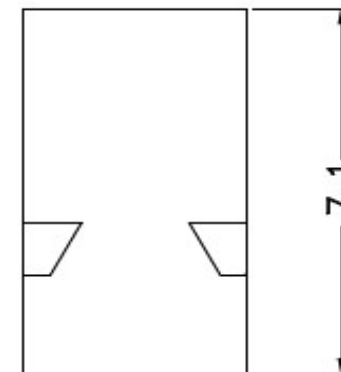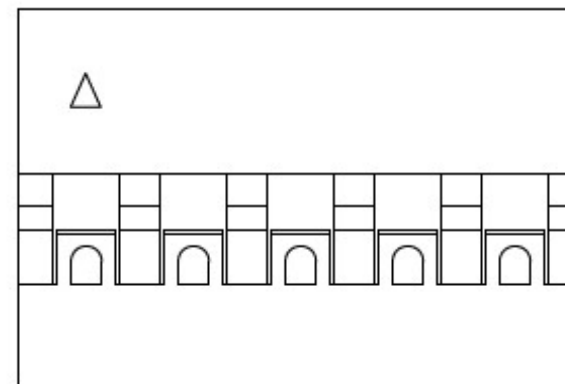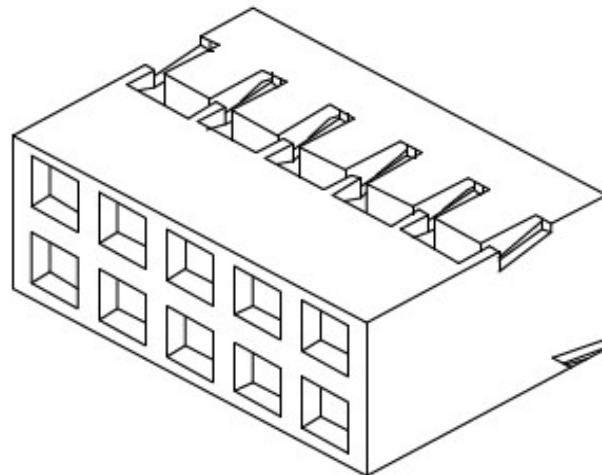

**Wire to Board Connector
(Housing) Dual Row**

Part No.: **T68T104**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	16.02.2023
APPD:	Schumi			FINISH	Jamy			Sheet No.	1 from 4

Customer:

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Dimension (mm)

No Pin	A	B	Qty/Bag
4	2,00	4,20	2000
6	4,00	6,20	2000
8	6,00	8,20	2000
10	8,00	10,20	1000
12	10,00	12,20	1000
14	12,00	14,20	1000
16	14,00	16,20	1000
18	16,00	18,20	1000
20	18,00	20,20	1000
22	20,00	22,20	1000
24	22,00	24,20	1000
26	24,00	26,20	1000
28	26,00	28,20	1000
30	28,00	30,20	1000
32	30,00	32,20	1000
34	32,00	34,20	1000
36	34,00	36,20	1000
38	36,00	38,20	1000
40	38,00	40,20	1000
42	40,00	42,20	1000
44	42,00	44,20	1000
46	44,00	46,20	1000
48	46,00	48,20	500
50	48,00	50,20	500

**Wire to Board Connector
(Housing) Dual Row**


Part No.: **T68T104**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	16.02.2023	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3		

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	No. Of Position	Colour of Housing	Special Function	Special Function	Special Function	Special Function	ROHS	Packing		
T68T104	02	BK	N	N	N	N	R	BU		

02= 2Pos.		N= No Function	N= No Function	N= No Function	N= No Function	R= ROHS Conform	BU= Bulk-Ware
2 ~ 20Pos.	BK= Black					N= NON ROHS Conform	

Wire to Board Connector (Housing) Dual Row	
Part No.:	T68T104
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	16.02.2023
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3