




EDCON-COMPONENTS




Technical Description

Curent Rating:	3,0A
Contact Resistance:	≤10mΩ max.
Withstanding Voltage:	800VAC/ DC
Insulation Resistance:	1000MΩ Min
Operating Temperature:	.-25°C to + 85°C
Contact Material:	Brass
Contact Plating:	Matte SN over Ni
Insulator Material:	Nylon 9T UL94V-0
Rated Voltage:	AC,DC 250V

Drawing

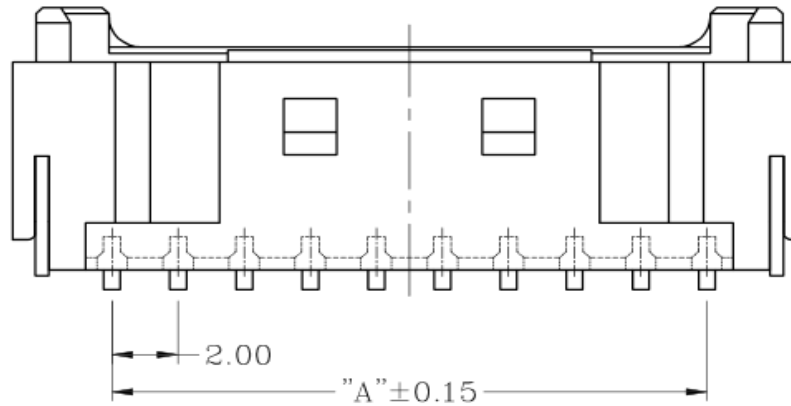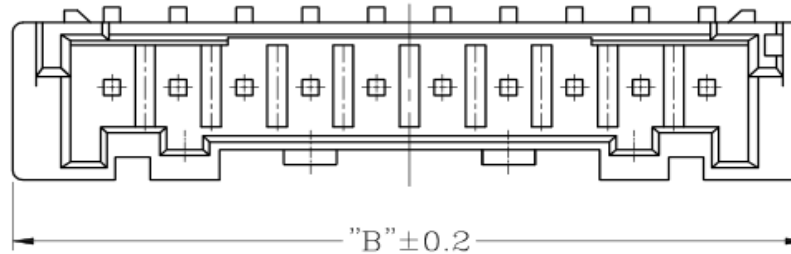

PCB Layout (mm)

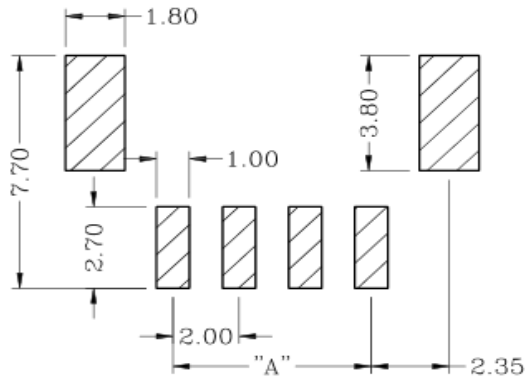


**Wire to Board Connector
(Wafer) SMD SIDE-Entry**

Part No.: **T68T114**


Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	23.02.2024
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

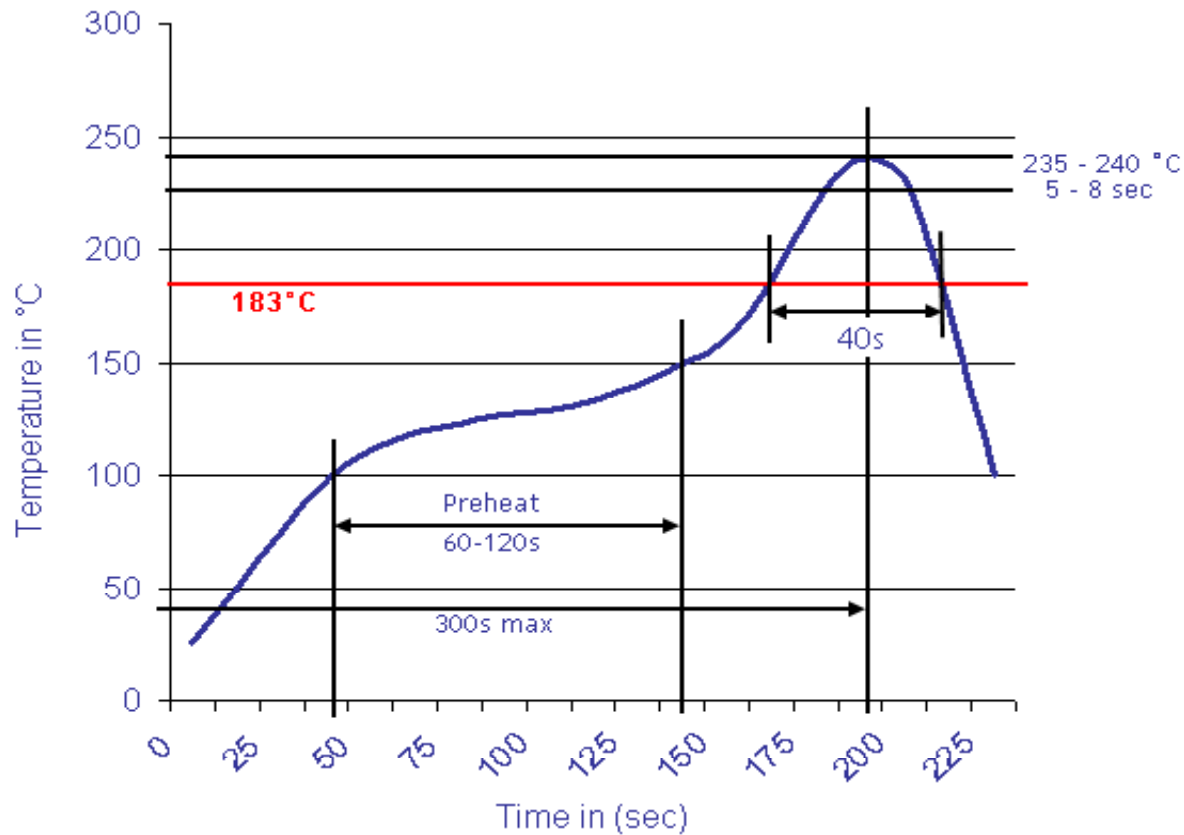

Wire to Board Connector (Wafer) SMD SIDE-Entry	
Part No.:	T68T114
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	23.02.2024
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	