



DATA SHEET

WTB Contact Type T1 to Housing Pitch 7,92mm

Serie: T68Z004


**WTB Contact Type T1 to
Housing Pitch 7,92mm**

Serie No.: **T68Z004**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.09.2025
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3



EDCON-COMPONENTS

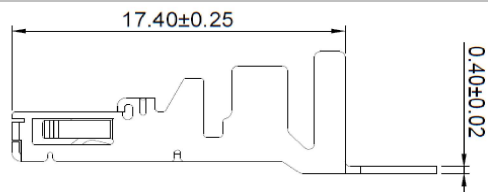


Technical Informations

Rated Current: 30A
 Contact Resistance: 5mΩ Max.
 Withstanding Voltage: 2500VAC / Minute
 Insulation Resistance: 10000MΩ Min.
 Operating Temperature: -40°C to + 105°C
 Voltage Rating: 600V AC/DC
 Contact Material: Phosphor Bronze
 Contact Plating: like Selection

Technical Dimensions (mm)

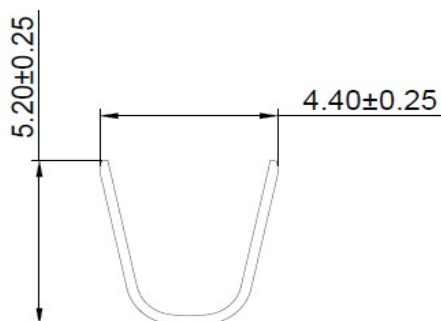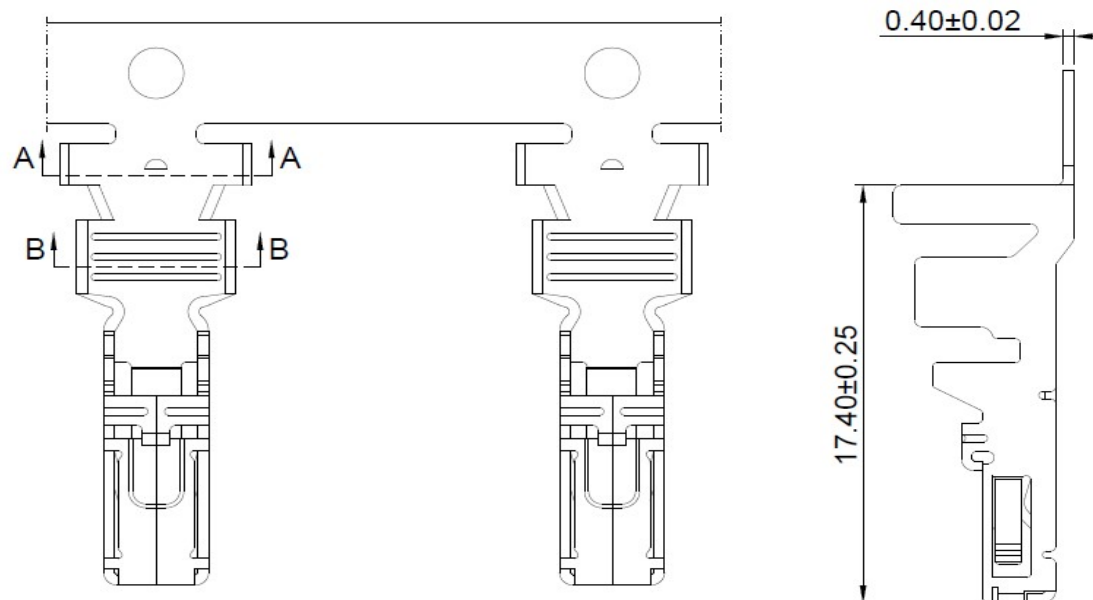

SEC:A-A

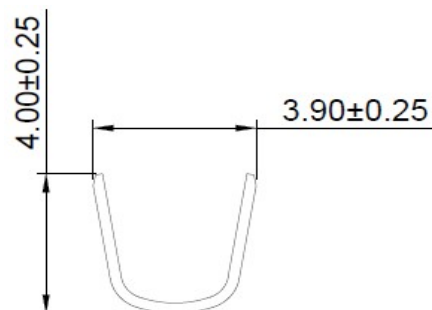

SEC:B-B

Wire Range	Insulation O.D.	Qty/Reel
AWG#14-AWG#16	3,80mm (max.)	2000PCCS


										WTB Contact Type T1 to Housing Pitch 7,92mm
Tolerances unless otherwise specified (mm)										
X X.X X.XX X.XXX Angle										
± ± ± ± ±3°										
DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.09.2025	Part No.: T68Z004
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3	Customer:

www.edcon-components.com

Copyright by S.Tiede

email: info@edcon-components.com



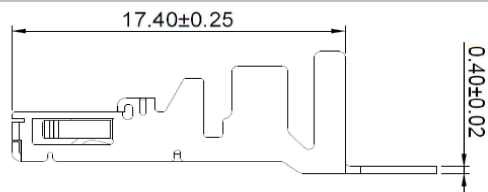

Ordering Informations

Customer	Contact Material	Contact Plating	Special function	Special function	Special function	ROHS	Packing Code	
----------	------------------	-----------------	------------------	------------------	------------------	------	--------------	--

T68Z004	-	PB	TN	N	N	N	R	TR	
----------------	---	-----------	-----------	----------	----------	----------	----------	-----------	--

PB= Phosphor Bronze	TN= Tin Plated	N= No function	N= No function	N= No function	R= ROHS Conform	TR= Tape/Reel	
	G0= Gold Plated (MOQ)						

WTB Contact Type T1 to Housing Pitch 7,92mm

Part No.: **T68Z004**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.09.2025
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3

Customer: